



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 82.9

HP Integrity rx7640
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 80.9

CPU2006 license: 03


Test date: Dec-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

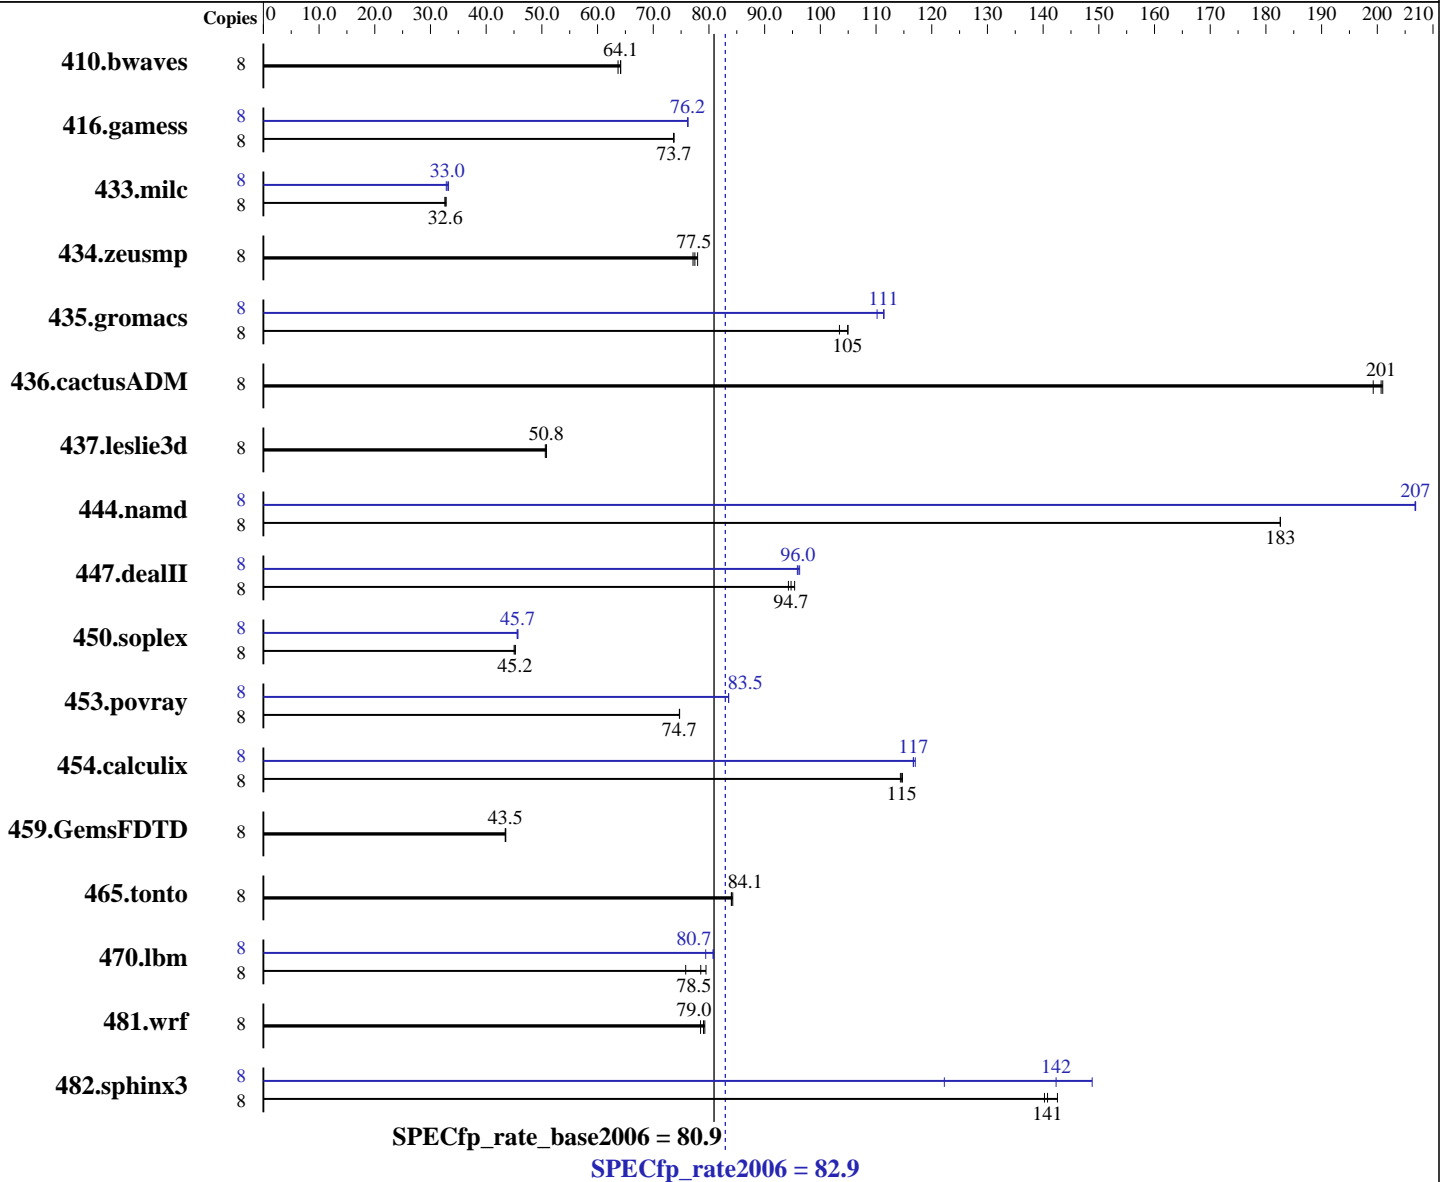

Hardware

CPU Name: Dual-Core Intel Itanium 2 9040
 CPU Characteristics: 1.6GHz/18MB, 533MHz FSB
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 1-8 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux AS release 4 (Update 4)
 Compiler: Intel C++ Compiler 9.1 for Linux (Build 20061105)
 Intel Fortran Compiler 9.1 for Linux (Build 20061105)
 Auto Parallel: No
 File System: ext3
 System State: Multi-user

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 82.9

HP Integrity rx7640
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 80.9

CPU2006 license: 03

Test date: Dec-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

L3 Cache: 9 MB I+D on chip per core
Other Cache: None
Memory: 32 GB (16x2GB DIMMs)
Disk Subsystem: 73GB 15K RPM SCSI
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1707	63.7	<u>1695</u>	<u>64.1</u>	1695	64.1	8	1707	63.7	<u>1695</u>	<u>64.1</u>	1695	64.1
416.gamess	8	2126	73.7	2125	73.7	<u>2126</u>	<u>73.7</u>	8	<u>2056</u>	<u>76.2</u>	2056	76.2	2055	76.2
433.milc	8	2253	32.6	2237	32.8	<u>2250</u>	<u>32.6</u>	8	2237	32.8	2209	33.2	<u>2225</u>	<u>33.0</u>
434.zeusmp	8	<u>940</u>	<u>77.5</u>	944	77.1	934	78.0	8	<u>940</u>	<u>77.5</u>	944	77.1	934	78.0
435.gromacs	8	552	103	<u>544</u>	<u>105</u>	544	105	8	513	111	518	110	<u>513</u>	<u>111</u>
436.cactusADM	8	480	199	<u>476</u>	<u>201</u>	476	201	8	480	199	<u>476</u>	<u>201</u>	476	201
437.leslie3d	8	1486	50.6	1480	50.8	<u>1480</u>	<u>50.8</u>	8	1486	50.6	1480	50.8	<u>1480</u>	<u>50.8</u>
444.namd	8	351	183	351	183	<u>351</u>	<u>183</u>	8	310	207	310	207	<u>310</u>	<u>207</u>
447.dealII	8	959	95.4	971	94.3	<u>966</u>	<u>94.7</u>	8	<u>953</u>	<u>96.0</u>	951	96.3	955	95.9
450.soplex	8	<u>1477</u>	<u>45.2</u>	1475	45.2	1482	45.0	8	1465	45.6	1460	45.7	<u>1461</u>	<u>45.7</u>
453.povray	8	<u>570</u>	<u>74.7</u>	569	74.7	570	74.7	8	510	83.5	<u>510</u>	<u>83.5</u>	510	83.5
454.calculix	8	575	115	<u>576</u>	<u>115</u>	577	114	8	<u>566</u>	<u>117</u>	564	117	566	117
459.GemsFDTD	8	1950	43.5	1955	43.4	<u>1953</u>	<u>43.5</u>	8	1950	43.5	1955	43.4	<u>1953</u>	<u>43.5</u>
465.tonto	8	<u>936</u>	<u>84.1</u>	934	84.3	937	84.0	8	<u>936</u>	<u>84.1</u>	934	84.3	937	84.0
470.lbm	8	1450	75.8	<u>1400</u>	<u>78.5</u>	1383	79.5	8	1384	79.4	<u>1362</u>	<u>80.7</u>	1360	80.8
481.wrf	8	1138	78.5	<u>1131</u>	<u>79.0</u>	1127	79.3	8	1138	78.5	<u>1131</u>	<u>79.0</u>	1127	79.3
482.sphinx3	8	1094	143	1112	140	<u>1107</u>	<u>141</u>	8	<u>1095</u>	<u>142</u>	1275	122	1048	149

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

stacksize set to unlimited prior to run

Platform Notes

System was configured as a single partition with 1 cell and 4 processors (8 cores) per cell. Memory was configured as 100% cell local.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 82.9

HP Integrity rx7640
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 80.9

CPU2006 license: 03

Test date: Dec-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -IPF_fp_relaxed -ansi-alias

C++ benchmarks:

-fast -IPF_fp_relaxed -ansi-alias

Fortran benchmarks:

-fast -IPF_fp_relaxed

Benchmarks using both Fortran and C:

-fast -IPF_fp_relaxed -ansi-alias



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 82.9

HP Integrity rx7640
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 80.9

CPU2006 license: 03

Test date: Dec-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -fast -IPF_fp_relaxed -ansi-alias -fno-alias

470.lbm: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-ansi-alias

482.sphinx3: Same as 470.lbm

C++ benchmarks:

444.namd: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-no-prefetch -fno-alias

447.deallI: -fast -IPF_fp_relaxed -ansi-alias -no-alias-args

450.soplex: -fast -IPF_fp_relaxed -ansi-alias -inline-factor=150

453.povray: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -fast -IPF_fp_relaxed -inline-factor=150

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 82.9

HP Integrity rx7640
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_rate_base2006 = 80.9

CPU2006 license: 03

Test date: Dec-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Nov-2006

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF_fp_relaxed
-fno-alias -inline-factor=150

436.cactusADM: basepeak = yes

454.calculix: -fast -IPF_fp_relaxed -fno-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/IPF_intel91_flags.20090715.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/IPF_intel91_flags.20090715.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:54:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 January 2007.