



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECint®\_rate2006 = 38.3

PRIMERGY TX200 S3, Intel Xeon processor 5110, 1.60 GHz

SPECint\_rate\_base2006 = 35.2

CPU2006 license: 22


Test date: Jun-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jul-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Jun-2007

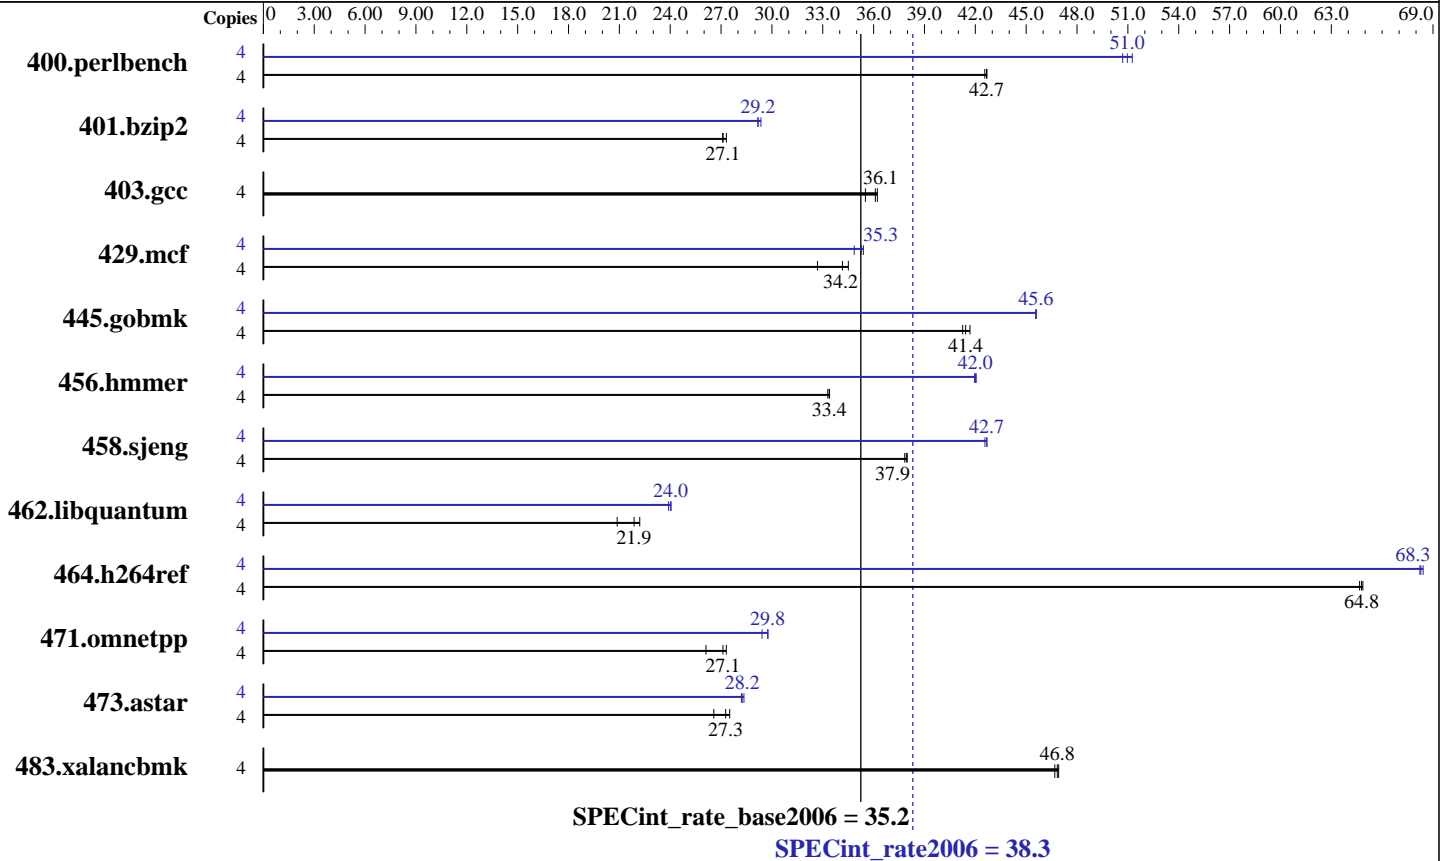

### Hardware

CPU Name: Intel Xeon 5110  
 CPU Characteristics: 1067 MHz system bus  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (4x2 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)  
 Disk Subsystem: Seagate ST336754SS (SAS, 36GB, 15000rpm)  
 Other Hardware: None

### Software

Operating System: SUSE LINUX Enterprise Server 10 (x86\_64), Kernel 2.6.16.21-0.8-smpt  
 Compiler: Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070308, Package-ID: I\_cc\_p\_10.0.023  
 Auto Parallel: No  
 File System: ext2  
 System State: Multiuser, Runlevel 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Smart Heap Library, Version 8.1  
 binutils-2.17.tar.gz, Version 2.17



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECint\_rate2006 = 38.3

PRIMERGY TX200 S3, Intel Xeon processor 5110,  
1.60 GHz

SPECint\_rate\_base2006 = 35.2

CPU2006 license: 22

Test date: Jun-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Jul-2006

Tested by: Fujitsu Siemens Computers

Software Availability: Jun-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	916	42.7	918	42.6	<b>916</b>	<b>42.7</b>	4	771	50.7	762	51.3	<b>767</b>	<b>51.0</b>
401.bzip2	4	<b>1423</b>	<b>27.1</b>	1425	27.1	1413	27.3	4	1323	29.2	<b>1323</b>	<b>29.2</b>	1315	29.4
403.gcc	4	907	35.5	<b>892</b>	<b>36.1</b>	889	36.2	4	907	35.5	<b>892</b>	<b>36.1</b>	889	36.2
429.mcf	4	1116	32.7	<b>1068</b>	<b>34.2</b>	1057	34.5	4	1047	34.9	<b>1034</b>	<b>35.3</b>	1031	35.4
445.gobmk	4	1017	41.3	<b>1013</b>	<b>41.4</b>	1007	41.7	4	920	45.6	<b>920</b>	<b>45.6</b>	921	45.6
456.hmmmer	4	1117	33.4	1121	33.3	<b>1118</b>	<b>33.4</b>	4	<b>888</b>	<b>42.0</b>	889	42.0	887	42.1
458.sjeng	4	1279	37.8	1274	38.0	<b>1276</b>	<b>37.9</b>	4	1137	42.6	<b>1134</b>	<b>42.7</b>	1134	42.7
462.libquantum	4	3971	20.9	<b>3790</b>	<b>21.9</b>	3733	22.2	4	3467	23.9	<b>3449</b>	<b>24.0</b>	3446	24.1
464.h264ref	4	1365	64.9	1369	64.7	<b>1366</b>	<b>64.8</b>	4	<b>1296</b>	<b>68.3</b>	1298	68.2	1294	68.4
471.omnetpp	4	957	26.1	<b>922</b>	<b>27.1</b>	915	27.3	4	850	29.4	840	29.8	<b>840</b>	<b>29.8</b>
473.astar	4	1057	26.6	<b>1030</b>	<b>27.3</b>	1021	27.5	4	<b>994</b>	<b>28.2</b>	990	28.4	996	28.2
483.xalancbmk	4	591	46.7	<b>589</b>	<b>46.8</b>	588	46.9	4	591	46.7	<b>589</b>	<b>46.8</b>	588	46.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All binaries were built with 32-bit Intel compiler except:  
401.bzip2 and 456.hmmmer in peak were built with 64-bit Intel  
compiler by changing the path for include and library files.

BIOS configuration:

Hardware Prefetch = Enable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:  
<http://www.fujitsu-siemens.com>

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

PRIMERGY TX200 S3, Intel Xeon processor 5110,  
1.60 GHz

**SPECint\_rate2006 = 38.3**

**SPECint\_rate\_base2006 = 35.2**

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Jun-2007

**Hardware Availability:** Jul-2006

**Software Availability:** Jun-2007

## Base Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-xT -O3 -ipo -no-prec-div -ansi-alias

-L/opt/SmartHeap\_8\_1/lib -lsmarheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc  
-I/opt/intel/cce/10.0.023/include  
-L/opt/intel/cce/10.0.023/lib

456.hmmer: /opt/intel/cce/10.0.023/bin/icc  
-I/opt/intel/cce/10.0.023/include  
-L/opt/intel/cce/10.0.023/lib

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

**SPECint\_rate2006 = 38.3**

PRIMERGY TX200 S3, Intel Xeon processor 5110,  
1.60 GHz

**SPECint\_rate\_base2006 = 35.2**

**CPU2006 license:** 22

**Test date:** Jun-2007

**Test sponsor:** Fujitsu Siemens Computers

**Hardware Availability:** Jul-2006

**Tested by:** Fujitsu Siemens Computers

**Software Availability:** Jun-2007

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof\_gen(pass 1) -prof\_use(pass 2) -fast

401.bzip2: -fast

403.gcc: basepeak = yes

429.mcf: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -prefetch  
-L/opt/SmartHeap\_8\_1/lib -lsmarheap

445.gobmk: Same as 400.perlbench

456.hmmer: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -unroll2

458.sjeng: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -unroll4

462.libquantum: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -prefetch  
-opt-streaming-stores always

464.h264ref: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof\_gen(pass 1) -prof\_use(pass 2) -fast -ansi-alias  
-L/opt/SmartHeap\_8\_1/lib -lsmarheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/FSC\\_Intel\\_flags.html](http://www.spec.org/cpu2006/flags/FSC_Intel_flags.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/FSC\\_Intel\\_flags.xml](http://www.spec.org/cpu2006/flags/FSC_Intel_flags.xml)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

PRIMERGY TX200 S3, Intel Xeon processor 5110,  
1.60 GHz

SPECint\_rate2006 = 38.3

SPECint\_rate\_base2006 = 35.2

**CPU2006 license:** 22

**Test sponsor:** Fujitsu Siemens Computers

**Tested by:** Fujitsu Siemens Computers

**Test date:** Jun-2007

**Hardware Availability:** Jul-2006

**Software Availability:** Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 13:24:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 24 July 2007.