



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 13.2

IBM System x3455 (AMD Opteron 2218)

SPECfp_base2006 = 12.6

CPU2006 license: 11


Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

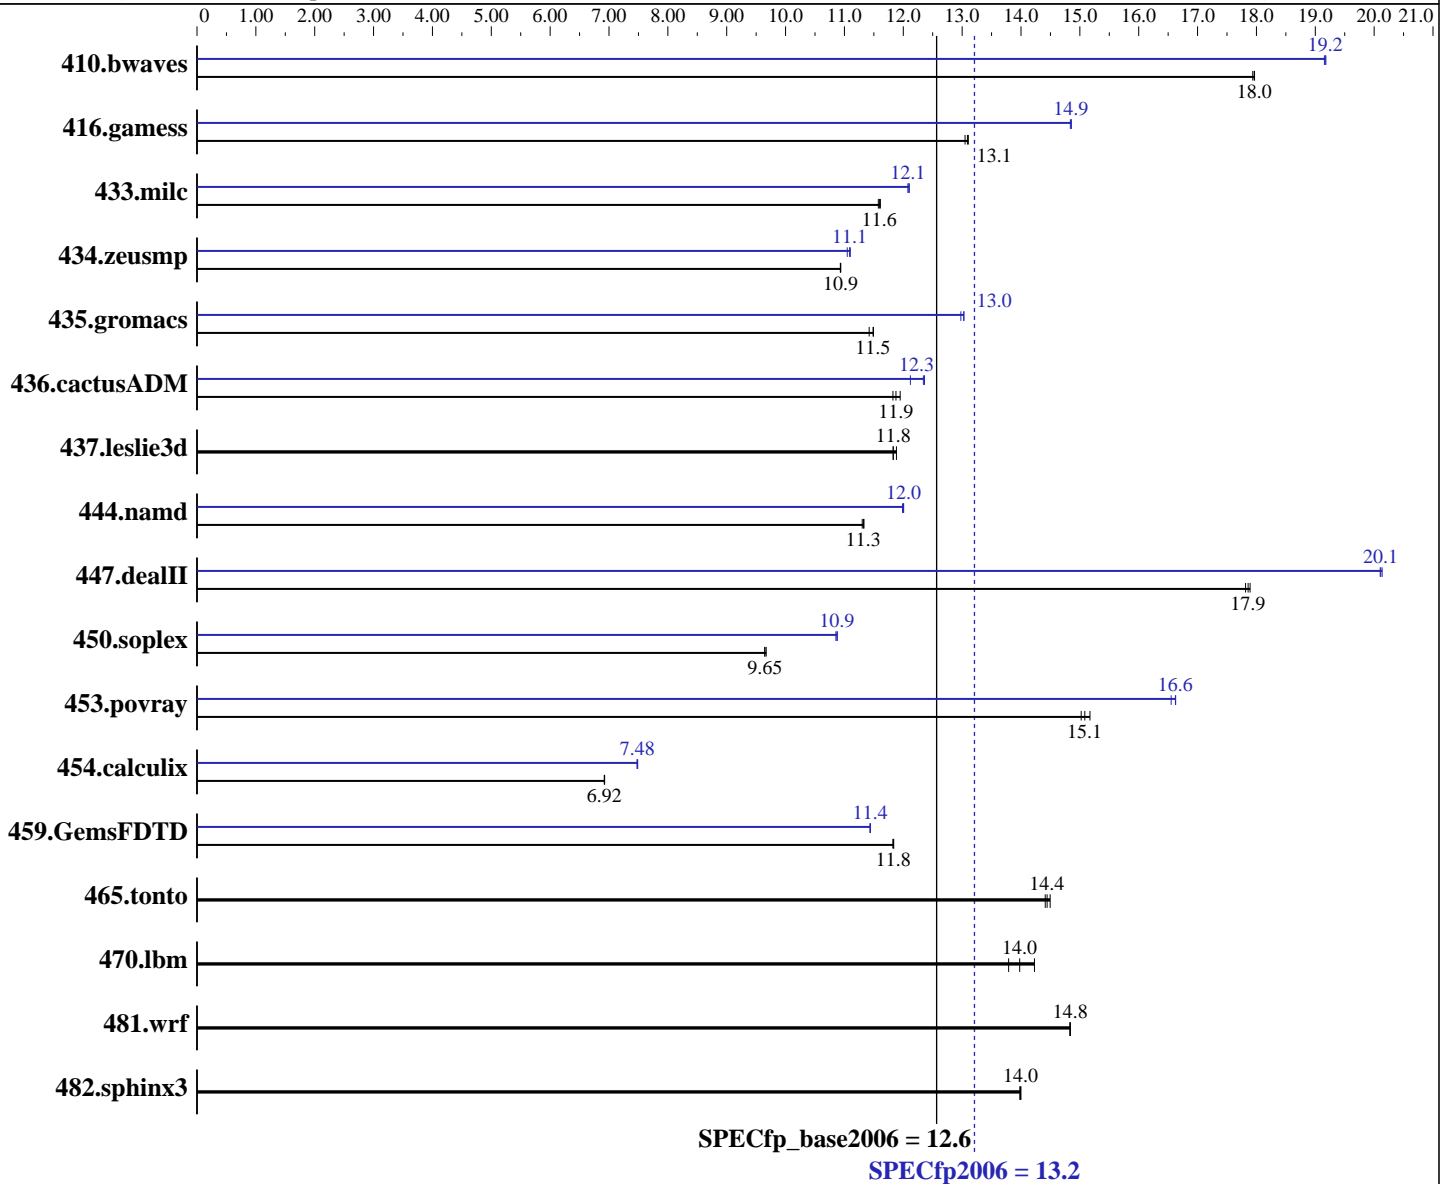

Hardware

CPU Name: AMD Opteron 2218
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SLES 10 (x86_64), 2.6.16.21-0.8-smp
 Compiler: QLogic PathScale Compiler Suite, Release 3.0
 Auto Parallel: No
 File System: ext3
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 13.2

IBM System x3455 (AMD Opteron 2218)

SPECfp_base2006 = 12.6

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2GB DDR2-5300 ECC)
Disk Subsystem: 1 x 160 GB Serial ATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	757	18.0	756	18.0	758	17.9	709	19.2	709	19.2	709	19.2
416.gamess	1494	13.1	1496	13.1	1500	13.0	1320	14.8	1318	14.9	1318	14.9
433.milc	792	11.6	793	11.6	791	11.6	758	12.1	760	12.1	760	12.1
434.zeusmp	832	10.9	832	10.9	833	10.9	821	11.1	820	11.1	824	11.0
435.gromacs	625	11.4	622	11.5	621	11.5	550	13.0	548	13.0	548	13.0
436.cactusADM	1000	11.9	1006	11.9	1011	11.8	968	12.3	967	12.4	986	12.1
437.leslie3d	791	11.9	794	11.8	795	11.8	791	11.9	794	11.8	795	11.8
444.namd	708	11.3	708	11.3	710	11.3	669	12.0	668	12.0	668	12.0
447.dealII	639	17.9	641	17.9	642	17.8	569	20.1	569	20.1	568	20.1
450.soplex	865	9.65	864	9.65	862	9.67	768	10.9	767	10.9	767	10.9
453.povray	353	15.1	351	15.2	354	15.0	321	16.6	320	16.6	320	16.6
454.calculix	1192	6.92	1191	6.93	1192	6.92	1102	7.49	1103	7.48	1103	7.48
459.GemsFDTD	897	11.8	897	11.8	896	11.8	928	11.4	928	11.4	927	11.4
465.tonto	679	14.5	681	14.4	683	14.4	679	14.5	681	14.4	683	14.4
470.lbm	966	14.2	983	14.0	996	13.8	966	14.2	983	14.0	996	13.8
481.wrf	753	14.8	753	14.8	753	14.8	753	14.8	753	14.8	753	14.8
482.sphinx3	1393	14.0	1394	14.0	1392	14.0	1393	14.0	1394	14.0	1392	14.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

taskset utility used to bind CPU(s) to processes
DSPEC_CPU_TABLE_WORKAROUND was used for portability when compiling 447.dealII
due to compilation being performed on SLES 9 SP3

Base Compiler Invocation

C benchmarks:
pathcc

C++ benchmarks:
pathCC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 13.2

IBM System x3455 (AMD Opteron 2218)

SPECfp_base2006 = 12.6

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

Base Compiler Invocation (Continued)

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Fortran benchmarks:
-Ofast -OPT:malloc_alg=1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1

Base Other Flags

C benchmarks:
-IPA:max_jobs=2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 13.2

IBM System x3455 (AMD Opteron 2218)

SPECfp_base2006 = 12.6

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

Base Other Flags (Continued)

C++ benchmarks:

-IPA:max_jobs=2

Fortran benchmarks:

-IPA:max_jobs=2

Benchmarks using both Fortran and C:

-IPA:max_jobs=2

Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_TABLE_WORKAROUND
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 13.2

IBM System x3455 (AMD Opteron 2218)

SPECfp_base2006 = 12.6

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc_alg=1

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-exceptions

447.dealIII: -Ofast -INLINE:aggressive=on -LNO:opt=0 -OPT:alias=disjoint
-m32 -fno-exceptions

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -m32 -O3
-OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1
-LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-fast-math

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off
-LNO:ignore_feedback=off

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O2
-OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256

434.zeusmp: -Ofast -CG:local_fwd_sched=on -LNO:blocking=off
-LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=3 -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10
-LNO:full_unroll=5 -ipa

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 13.2

IBM System x3455 (AMD Opteron 2218)

SPECfp_base2006 = 12.6

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

Peak Optimization Flags (Continued)

454.calculix: -Ofast -LNO:simd=0 -WOPT:mem_opnds=on

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-IPA:max_jobs=2

C++ benchmarks:

-IPA:max_jobs=2

Fortran benchmarks:

-IPA:max_jobs=2

Benchmarks using both Fortran and C:

-IPA:max_jobs=2

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 13 11:26:19 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 August 2007.