



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 11.6

IBM System x3655 (AMD Opteron 2214)

SPECfp_base2006 = 11.1

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

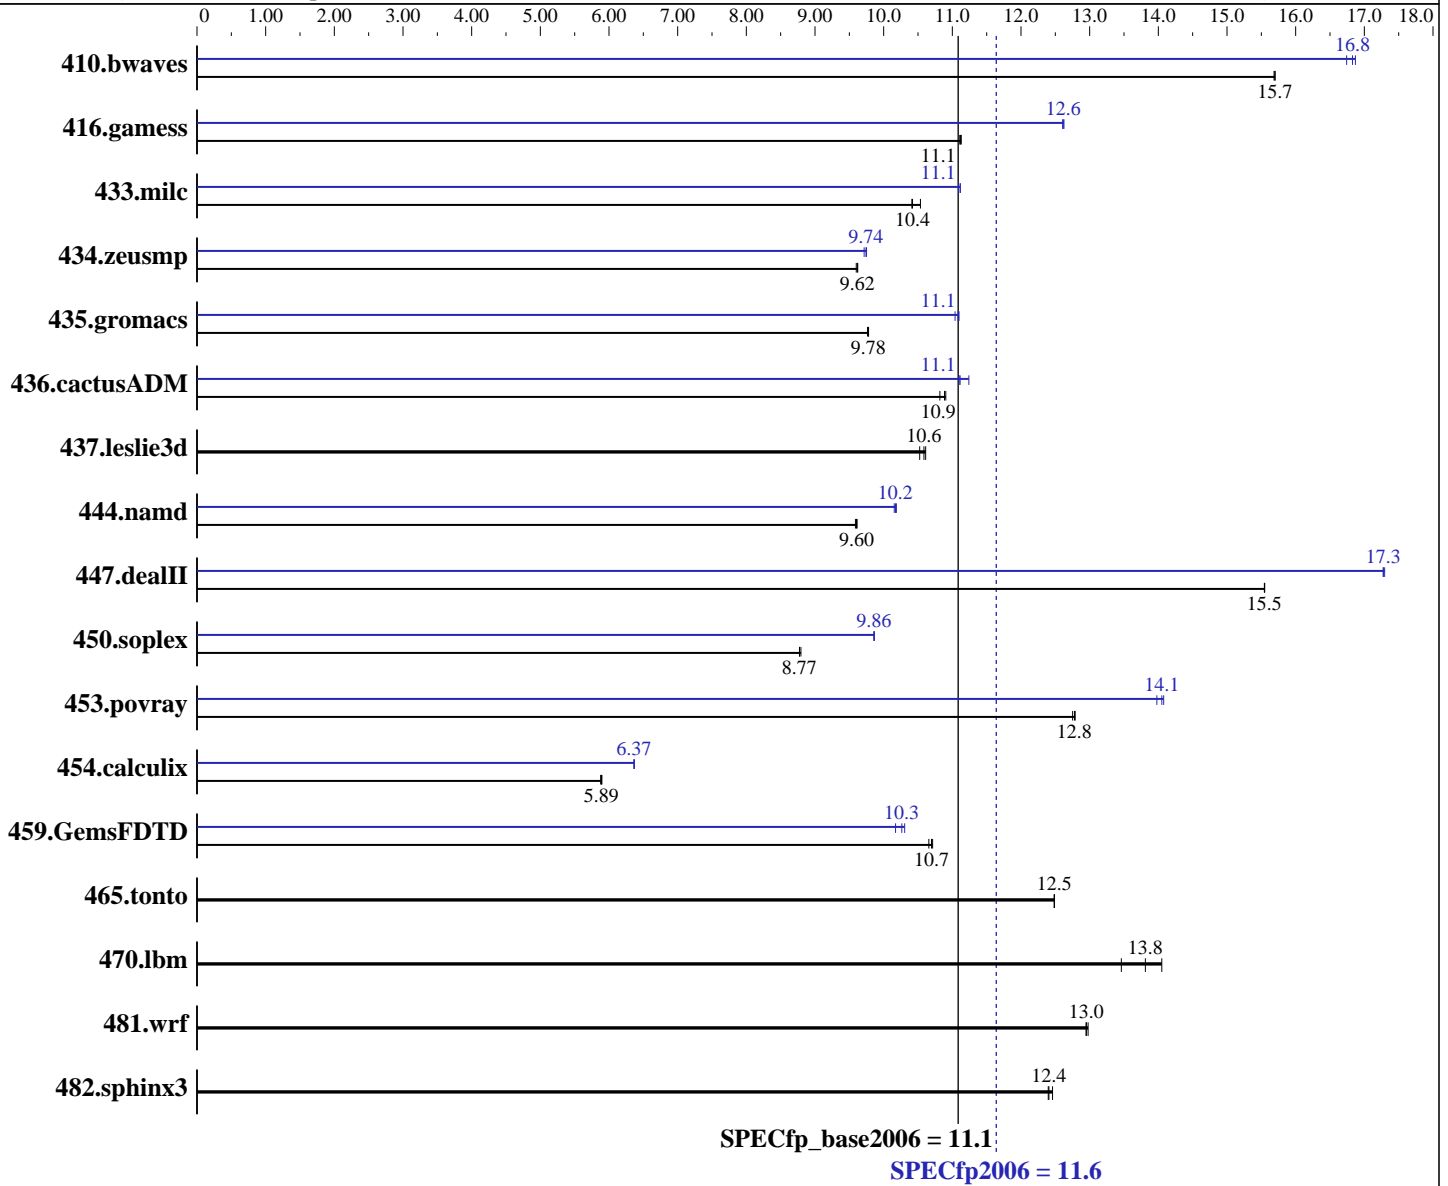

Hardware

CPU Name: AMD Opteron 2214
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SLES 10 (x86_64), 2.6.16.21-0.8-smp
 Compiler: QLogic PathScale Compiler Suite, Release 3.0
 Auto Parallel: No
 File System: ext3
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 11.6

IBM System x3655 (AMD Opteron 2214)

SPECfp_base2006 = 11.1

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2GB DDR2-5300 ECC)
Disk Subsystem: 1 x 36 GB SAS, 10000 RPM
Other Hardware: None

Other Software: MicroQuill SmartHeap 8.1

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	866	15.7	866	15.7	866	15.7	808	16.8	806	16.9	812	16.7
416.gamess	1761	11.1	1759	11.1	1763	11.1	1553	12.6	1552	12.6	1551	12.6
433.milc	881	10.4	882	10.4	871	10.5	826	11.1	828	11.1	826	11.1
434.zeusmp	948	9.60	946	9.62	946	9.62	934	9.74	933	9.75	937	9.72
435.gromacs	730	9.78	730	9.78	731	9.76	647	11.0	643	11.1	644	11.1
436.cactusADM	1096	10.9	1105	10.8	1098	10.9	1063	11.2	1075	11.1	1077	11.1
437.leslie3d	886	10.6	888	10.6	893	10.5	886	10.6	888	10.6	893	10.5
444.namd	834	9.61	835	9.60	836	9.59	788	10.2	787	10.2	790	10.2
447.dealII	736	15.5	736	15.5	736	15.5	662	17.3	661	17.3	662	17.3
450.soplex	948	8.80	951	8.77	951	8.77	846	9.86	846	9.86	846	9.86
453.povray	416	12.8	416	12.8	417	12.8	378	14.1	379	14.1	381	14.0
454.calculix	1399	5.90	1404	5.88	1401	5.89	1296	6.36	1296	6.37	1296	6.37
459.GemsFDTD	992	10.7	996	10.7	990	10.7	1034	10.3	1029	10.3	1043	10.2
465.tonto	788	12.5	788	12.5	788	12.5	788	12.5	788	12.5	788	12.5
470.lbm	978	14.1	995	13.8	1021	13.5	978	14.1	995	13.8	1021	13.5
481.wrf	861	13.0	862	13.0	863	12.9	861	13.0	862	13.0	863	12.9
482.sphinx3	1564	12.5	1571	12.4	1572	12.4	1564	12.5	1571	12.4	1572	12.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

taskset utility used to bind CPU(s) to processes
DSPEC_CPU_TABLE_WORKAROUND was used for portability when compiling 447.dealII
due to compilation being performed on SLES 9 SP3

Base Compiler Invocation

C benchmarks:
pathcc

C++ benchmarks:
pathCC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 11.6

IBM System x3655 (AMD Opteron 2214)

SPECfp_base2006 = 11.1

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

Base Compiler Invocation (Continued)

Fortran benchmarks:
pathf95

Benchmarks using both Fortran and C:
pathcc pathf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast

C++ benchmarks:
-Ofast

Fortran benchmarks:
-Ofast -OPT:malloc_alg=1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1

Base Other Flags

C benchmarks:
-IPA:max_jobs=2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 11.6

IBM System x3655 (AMD Opteron 2214)

SPECfp_base2006 = 11.1

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

Base Other Flags (Continued)

C++ benchmarks:

-IPA:max_jobs=2

Fortran benchmarks:

-IPA:max_jobs=2

Benchmarks using both Fortran and C:

-IPA:max_jobs=2

Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_TABLE_WORKAROUND
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 11.6

IBM System x3655 (AMD Opteron 2214)

SPECfp_base2006 = 11.1

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc_alg=1

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-exceptions

447.dealIII: -Ofast -INLINE:aggressive=on -LNO:opt=0 -OPT:alias=disjoint
-m32 -fno-exceptions

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -m32 -O3
-OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1
-LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-fno-fast-math

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off
-LNO:ignore_feedback=off

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O2
-OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256

434.zeusmp: -Ofast -CG:local_fwd_sched=on -LNO:blocking=off
-LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: basepeak = yes

Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=3 -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10
-LNO:full_unroll=5 -ipa

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 11.6

IBM System x3655 (AMD Opteron 2214)

SPECfp_base2006 = 11.1

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

Peak Optimization Flags (Continued)

454.calculix: -Ofast -LNO:simd=0 -WOPT:mem_opnds=on

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-IPA:max_jobs=2

C++ benchmarks:

-IPA:max_jobs=2

Fortran benchmarks:

-IPA:max_jobs=2

Benchmarks using both Fortran and C:

-IPA:max_jobs=2

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 13 11:28:03 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 September 2007.