



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint[®]2006 = 15.2

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_base2006 = 14.1

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Aug-2007

Hardware Availability: Sep-2007

Software Availability: Oct-2007

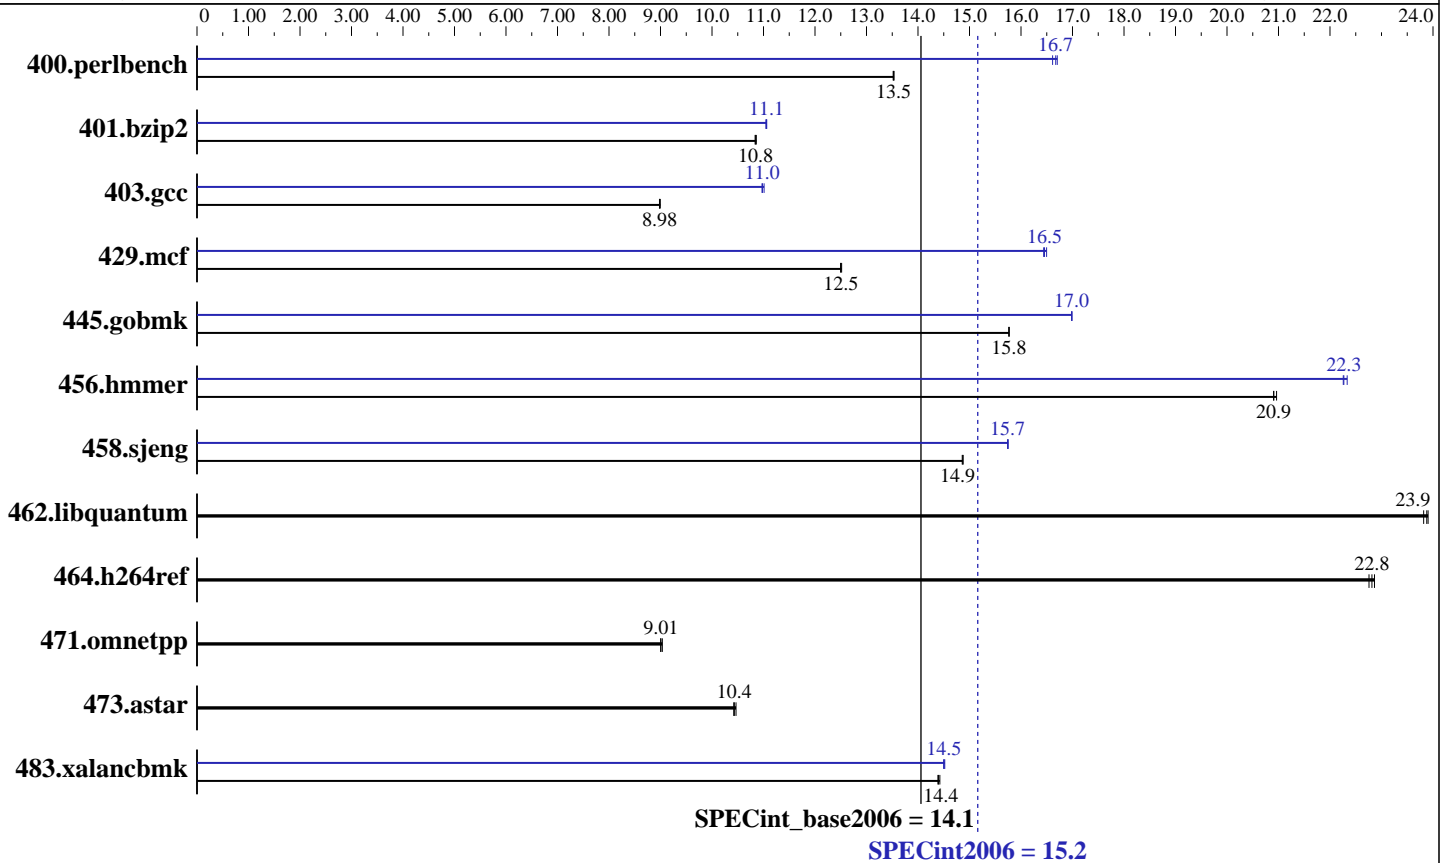

Hardware

CPU Name: AMD Opteron 8224 SE
 CPU Characteristics:
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 1, 2, 3, 4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: None
 Other Cache: None
 Memory: 32 GB (16 x 2GB, DDR2-667 CL5 ECC REG Dual Rank)
 Disk Subsystem: 1 x 73GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 SP1 64-bit kernel
 Compiler: The Portland Group (PGI)
 PGI pgcc 7.1-0 C Compiler
 PGI pgCC 7.1-0 C++ Compiler
 Auto Parallel: No
 File System: ext3
 System State: Multi-user, run level 3
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 15.2

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_base2006 = 14.1

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>722</u>	<u>13.5</u>	723	13.5	722	13.5	588	16.6	585	16.7	<u>586</u>	<u>16.7</u>
401.bzip2	889	10.9	<u>890</u>	<u>10.8</u>	890	10.8	874	11.0	872	11.1	<u>873</u>	<u>11.1</u>
403.gcc	895	9.00	<u>896</u>	<u>8.98</u>	896	8.98	731	11.0	<u>733</u>	<u>11.0</u>	734	11.0
429.mcf	729	12.5	<u>729</u>	<u>12.5</u>	730	12.5	553	16.5	555	16.4	<u>554</u>	<u>16.5</u>
445.gobmk	665	15.8	<u>665</u>	<u>15.8</u>	665	15.8	617	17.0	618	17.0	<u>618</u>	<u>17.0</u>
456.hmmer	<u>446</u>	<u>20.9</u>	445	21.0	446	20.9	419	22.3	418	22.3	<u>419</u>	<u>22.3</u>
458.sjeng	<u>814</u>	<u>14.9</u>	814	14.9	814	14.9	768	15.8	769	15.7	<u>769</u>	<u>15.7</u>
462.libquantum	870	23.8	<u>868</u>	<u>23.9</u>	867	23.9	870	23.8	<u>868</u>	<u>23.9</u>	867	23.9
464.h264ref	<u>970</u>	<u>22.8</u>	972	22.8	968	22.9	<u>970</u>	<u>22.8</u>	972	22.8	968	22.9
471.omnetpp	692	9.04	<u>694</u>	<u>9.01</u>	694	9.00	692	9.04	<u>694</u>	<u>9.01</u>	694	9.00
473.astar	671	10.5	<u>673</u>	<u>10.4</u>	674	10.4	671	10.5	<u>673</u>	<u>10.4</u>	674	10.4
483.xalancbmk	478	14.4	<u>479</u>	<u>14.4</u>	480	14.4	475	14.5	<u>476</u>	<u>14.5</u>	476	14.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Environment stack size set to 'unlimited'
'numactl' was used to bind copies to the cores
Set vm/nr_hugepages=128 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 15.2

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_base2006 = 14.1

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

Base Portability Flags (Continued)

464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mipa=noarg -Mfprelaxed
-Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc --zc_eh
-tp k8-32 -Bstatic_pgi -lsmarheap

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w -L/proj/qa/smarheap/SmartHeap_8/lib

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 15.2

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_base2006 = 14.1

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=inline(pass 2) -fast
-O4 -Mfprelaxed -Msmartalloc=huge:8 -Mnounroll -tp k8-64
-Bstatic_pgi

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi

403.gcc: -fastsse -Mfprelaxed -Msmartalloc=huge:32 -Mipa=fast
-Mipa=inline -tp k8-32 -Bstatic_pgi

429.mcf: -fastsse -Mipa=fast -Mipa=inline -Msmartalloc=huge:16
-tp k8-32 -Bstatic_pgi

445.gobmk: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2) -fast -O4
-Msmartalloc=huge:32 -Mfprelaxed -Mnovect -tp k8-64
-Bstatic_pgi

456.hmmer: -fast -Msmartalloc=huge:32 -Mfprelaxed -Msafeptr
-Mipa=const -Mipa=ptr -Mipa=arg -tp k8-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fast
-Msmartalloc=huge:32 -Mfprelaxed -tp k8-64 -Bstatic_pgi

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk: -fastsse -O4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc --zc_eh -tp k8-32 -Bstatic_pgi -lsmartheap

Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w -L/proj/qa/smartheap/SmartHeap_8/lib



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 15.2

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_base2006 = 14.1

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi710_flags.20090714.01.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/pgi710_flags.20090714.01.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:16:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 September 2007.