



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 116**

**IBM BladeCenter HS21 (Intel Xeon E5420)**

**SPECint\_rate\_base2006 = 94.8**

**CPU2006 license:** 11


**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Dec-2007

**Hardware Availability:** Jan-2008

**Software Availability:** Nov-2007

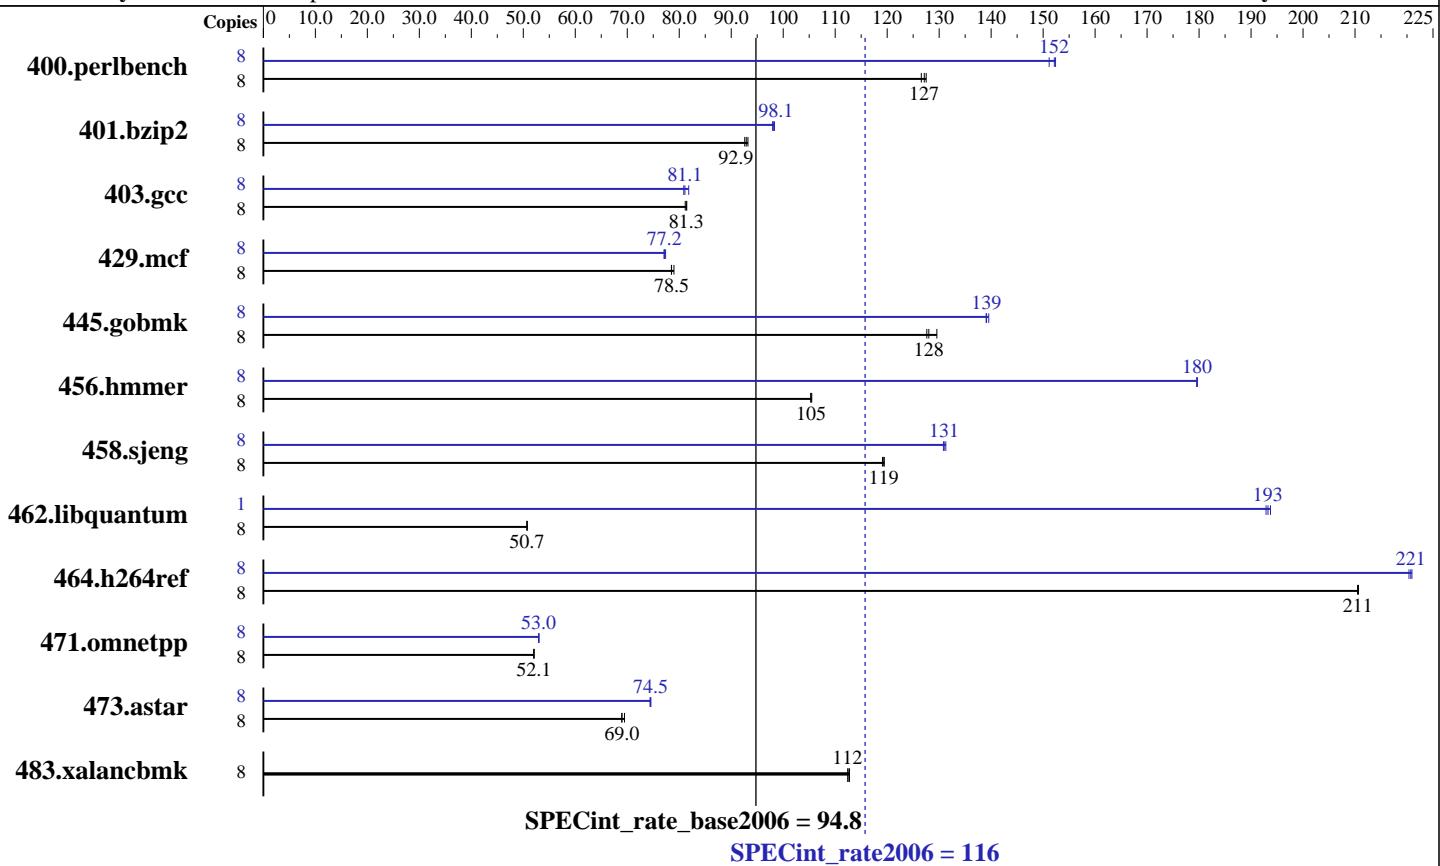

## Hardware

CPU Name:	Intel Xeon E5420
CPU Characteristics:	1333MHz system bus
CPU MHz:	2493
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem:	1 x 36 GB SAS, 10000 RPM
Other Hardware:	None

## Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 116**

**IBM BladeCenter HS21 (Intel Xeon E5420)**

**SPECint\_rate\_base2006 = 94.8**

**CPU2006 license:** 11

**Test date:** Dec-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>615</b>	<b>127</b>	618	127	613	128	8	<b>517</b>	<b>151</b>	<b>514</b>	<b>152</b>	513	152
401.bzip2	8	<b>831</b>	<b>92.9</b>	834	92.6	828	93.2	8	<b>785</b>	<b>98.3</b>	<b>787</b>	<b>98.1</b>	788	98.0
403.gcc	8	791	81.4	<b>792</b>	<b>81.3</b>	794	81.1	8	<b>796</b>	<b>80.9</b>	<b>794</b>	<b>81.1</b>	787	81.8
429.mcf	8	924	79.0	930	78.5	<b>929</b>	<b>78.5</b>	8	943	77.4	947	77.1	<b>946</b>	<b>77.2</b>
445.gobmk	8	648	130	658	128	<b>656</b>	<b>128</b>	8	<b>603</b>	<b>139</b>	604	139	601	140
456.hammer	8	<b>708</b>	<b>105</b>	709	105	708	105	8	416	180	415	180	<b>415</b>	<b>180</b>
458.sjeng	8	813	119	810	119	<b>811</b>	<b>119</b>	8	<b>739</b>	<b>131</b>	740	131	737	131
462.libquantum	8	3266	50.8	3270	50.7	<b>3267</b>	<b>50.7</b>	1	<b>107</b>	<b>193</b>	107	194	107	193
464.h264ref	8	841	210	<b>841</b>	<b>211</b>	840	211	8	<b>802</b>	<b>221</b>	801	221	803	220
471.omnetpp	8	<b>961</b>	<b>52.1</b>	960	52.1	961	52.0	8	943	53.0	944	53.0	<b>944</b>	<b>53.0</b>
473.astar	8	<b>814</b>	<b>69.0</b>	808	69.5	814	69.0	8	<b>754</b>	<b>74.5</b>	755	74.4	753	74.5
483.xalancbmk	8	491	112	490	113	<b>491</b>	<b>112</b>	8	491	112	490	113	<b>491</b>	<b>112</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode

Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled

OMP\_NUM\_THREADS set to number of cores

KMP\_AFFINITY set to physical,0

KMP\_STACKSIZE set to 64M

taskset utility used to bind CPU(s) to processes

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 116**

IBM BladeCenter HS21 (Intel Xeon E5420)

**SPECint\_rate\_base2006 = 94.8**

CPU2006 license: 11

**Test date:** Dec-2007

Test sponsor: IBM Corporation

**Hardware Availability:** Jan-2008

Tested by: IBM Corporation

**Software Availability:** Nov-2007

## Base Optimization Flags

C benchmarks:

```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include
```

```
456.hmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:

```
icpc
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 116**

IBM BladeCenter HS21 (Intel Xeon E5420)

**SPECint\_rate\_base2006 = 94.8**

CPU2006 license: 11

Test date: Dec-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll14 -O0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 116**

IBM BladeCenter HS21 (Intel Xeon E5420)

**SPECint\_rate\_base2006 = 94.8**

**CPU2006 license:** 11

**Test date:** Dec-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jan-2008

**Tested by:** IBM Corporation

**Software Availability:** Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.13.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 16:30:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 February 2008.