



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 96.5

IBM System x3550 (Intel Xeon E5345)

SPECint_rate_base2006 = 85.4

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2008

Hardware Availability: Feb-2007

Software Availability: Nov-2007

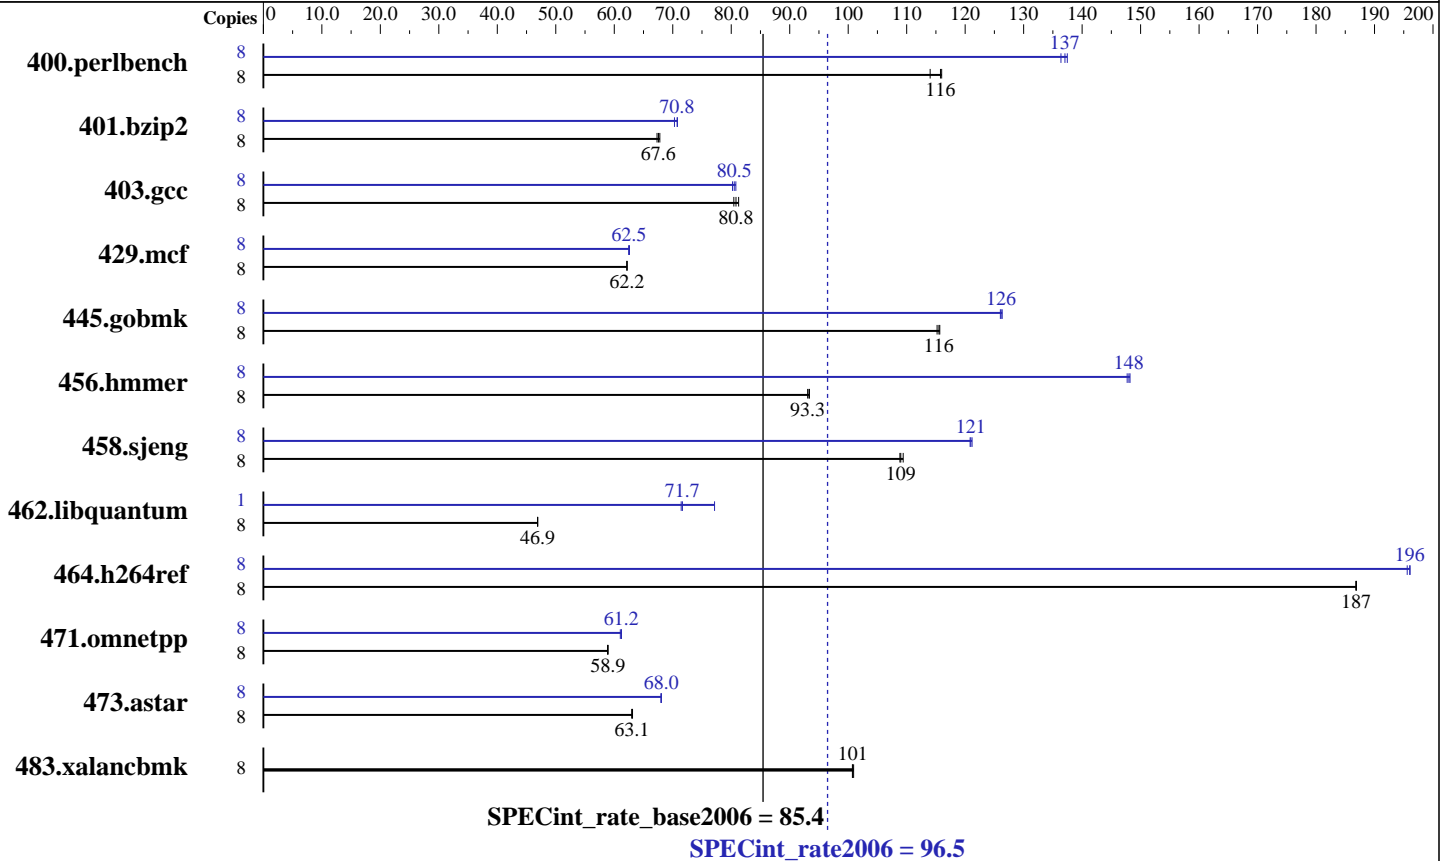

Hardware

CPU Name: Intel Xeon E5345
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 2333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 36 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 96.5

IBM System x3550 (Intel Xeon E5345)

SPECint_rate_base2006 = 85.4

CPU2006 license: 11

Test date: Feb-2008

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	686	114	674	116	675	116	8	573	136	570	137	569	137
401.bzip2	8	1143	67.6	1147	67.3	1139	67.8	8	1090	70.8	1098	70.3	1091	70.8
403.gcc	8	797	80.8	792	81.3	801	80.4	8	800	80.5	803	80.2	797	80.8
429.mcf	8	1173	62.2	1174	62.2	1174	62.2	8	1168	62.5	1165	62.6	1167	62.5
445.gobmk	8	728	115	726	116	726	116	8	666	126	664	126	665	126
456.hmmmer	8	799	93.4	800	93.3	802	93.1	8	505	148	504	148	504	148
458.sjeng	8	889	109	888	109	885	109	8	799	121	801	121	800	121
462.libquantum	8	3535	46.9	3533	46.9	3536	46.9	1	290	71.4	289	71.7	269	77.2
464.h264ref	8	948	187	947	187	947	187	8	903	196	903	196	905	196
471.omnetpp	8	848	58.9	849	58.9	850	58.8	8	817	61.2	819	61.0	817	61.2
473.astar	8	891	63.1	890	63.1	892	63.0	8	825	68.0	825	68.0	826	68.0
483.xalancbmk	8	548	101	548	101	547	101	8	548	101	548	101	547	101

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Disabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
Powersaved dameon was disabled in OS
taskset utility used to bind CPU(s) to processes

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 96.5

IBM System x3550 (Intel Xeon E5345)

SPECint_rate_base2006 = 85.4

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2008

Hardware Availability: Feb-2007

Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:

-fast -inline-alloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 96.5

IBM System x3550 (Intel Xeon E5345)

SPECint_rate_base2006 = 85.4

CPU2006 license: 11

Test date: Feb-2008

Test sponsor: IBM Corporation

Hardware Availability: Feb-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090714.05.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 96.5

IBM System x3550 (Intel Xeon E5345)

SPECint_rate_base2006 = 85.4

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2008

Hardware Availability: Feb-2007

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-INT-ia32-linux-flags.20090714.05.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:24:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 March 2008.