



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 13.7

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECint\_base2006 = 11.9

CPU2006 license: 55


Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

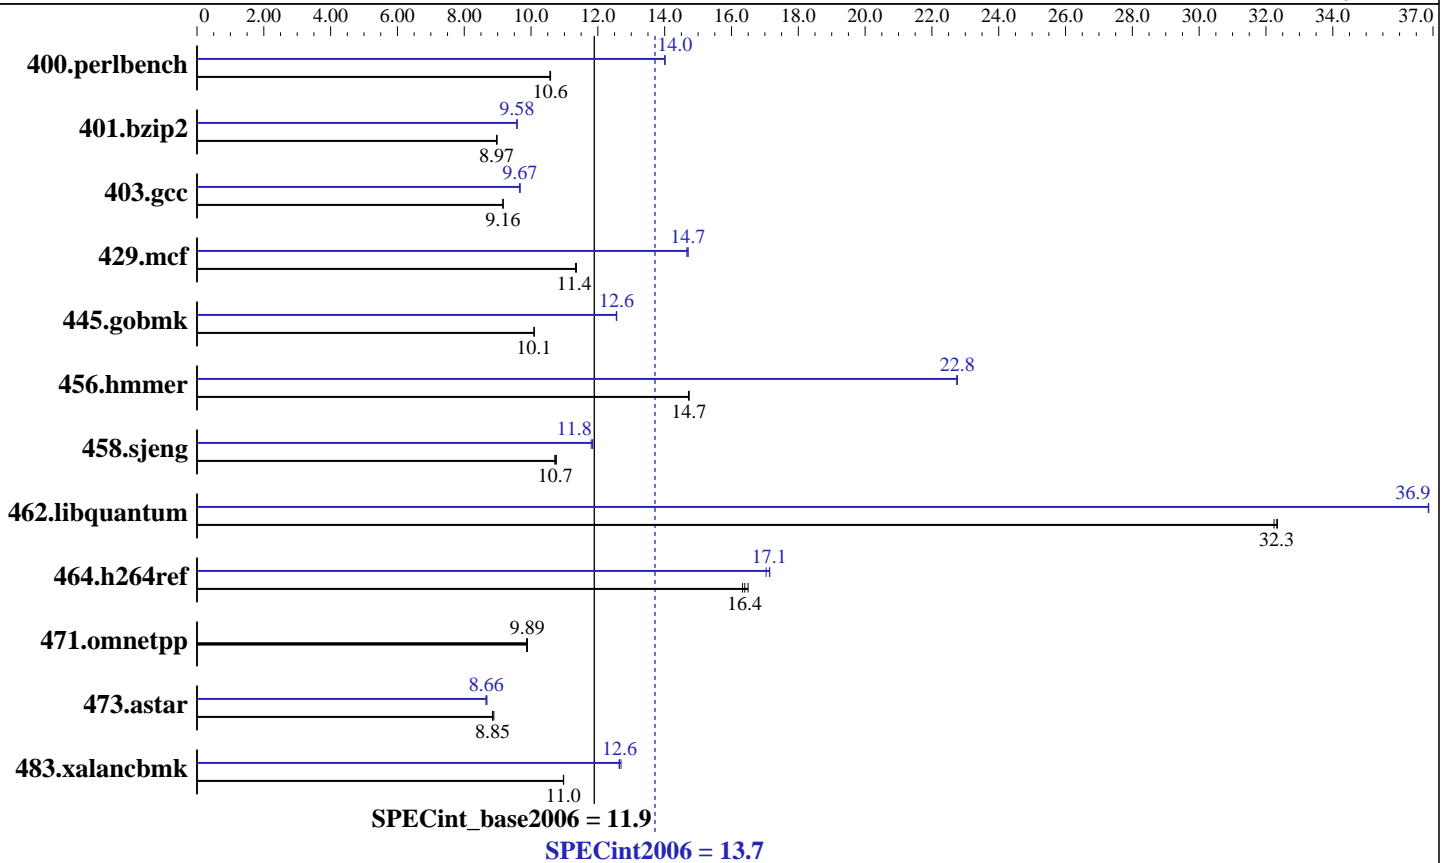

### Hardware

CPU Name: AMD Opteron 2354  
 CPU Characteristics:  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB, DDR2-667, CL5, Reg, Dual Rank)  
 Disk Subsystem: 1 x 73 SATA 15000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 13.7

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECint\_base2006 = 11.9

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Aug-2008  
Hardware Availability: Aug-2008  
Software Availability: May-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	923	10.6	925	10.6	<u>924</u>	<u>10.6</u>	<u>698</u>	<u>14.0</u>	698	14.0	697	14.0
401.bzip2	1074	8.98	1076	8.97	<u>1076</u>	<u>8.97</u>	<u>1007</u>	<u>9.58</u>	1007	9.58	1007	9.58
403.gcc	879	9.16	879	9.16	<u>879</u>	<u>9.16</u>	<u>833</u>	<u>9.67</u>	832	9.67	833	9.66
429.mcf	<u>803</u>	<u>11.4</u>	803	11.4	805	11.3	622	14.7	<u>620</u>	<u>14.7</u>	620	14.7
445.gobmk	1039	10.1	<u>1039</u>	<u>10.1</u>	1039	10.1	<u>835</u>	<u>12.6</u>	836	12.6	835	12.6
456.hmmer	<u>634</u>	<u>14.7</u>	634	14.7	633	14.7	<u>410</u>	<u>22.8</u>	410	22.8	410	22.7
458.sjeng	1125	10.8	<u>1128</u>	<u>10.7</u>	1130	10.7	1021	11.8	1025	11.8	<u>1023</u>	<u>11.8</u>
462.libquantum	643	32.2	641	32.3	<u>641</u>	<u>32.3</u>	562	36.9	<u>562</u>	<u>36.9</u>	562	36.9
464.h264ref	1341	16.5	1355	16.3	<u>1350</u>	<u>16.4</u>	<u>1291</u>	<u>17.1</u>	1291	17.1	1299	17.0
471.omnetpp	633	9.87	<u>632</u>	<u>9.89</u>	632	9.89	633	9.87	<u>632</u>	<u>9.89</u>	632	9.89
473.astar	<u>793</u>	<u>8.85</u>	794	8.84	790	8.89	811	8.66	<u>811</u>	<u>8.66</u>	809	8.68
483.xalancbmk	629	11.0	629	11.0	<u>629</u>	<u>11.0</u>	546	12.6	544	12.7	<u>546</u>	<u>12.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'numactl' was used to bind copies to the cores  
Environment variable PGI\_HUGE\_PAGES set to 150  
'ulimit -s unlimited' was used to set environment stack size  
mount -t hugetlbfs nodev /mnt/hugepages

## Base Compiler Invocation

C benchmarks:  
pgcc  
  
C++ benchmarks:  
pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 13.7

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECint\_base2006 = 11.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Portability Flags (Continued)

464.h264ref: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
--zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w -Mipa=jobs:4

C++ benchmarks:

-w -Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 13.7

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECint\_base2006 = 11.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Portability Flags (Continued)

445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -WOPT:if\_conv=0 -CG:local\_sched\_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4  
 -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64  
 -Bstatic\_pgi

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150  
 -tp barcelona -Bstatic\_pgi

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0  
 -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed  
 -Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg  
 -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)  
 -Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse  
 -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64  
 -Bstatic\_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8  
 -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64  
 -Bstatic\_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)  
 -Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse  
 -Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64  
 -Bstatic\_pgi

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 13.7

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECint\_base2006 = 11.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on -IPA:plimit=525  
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-w -Mipa=jobs:4(pass 2)

400.perlbench: No flags used

401.bzip2: -w

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 19:16:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 September 2008.