



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

SPECint®\_rate2006 = 258

SPECint\_rate\_base2006 = 241

CPU2006 license: 9016


Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Mar-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

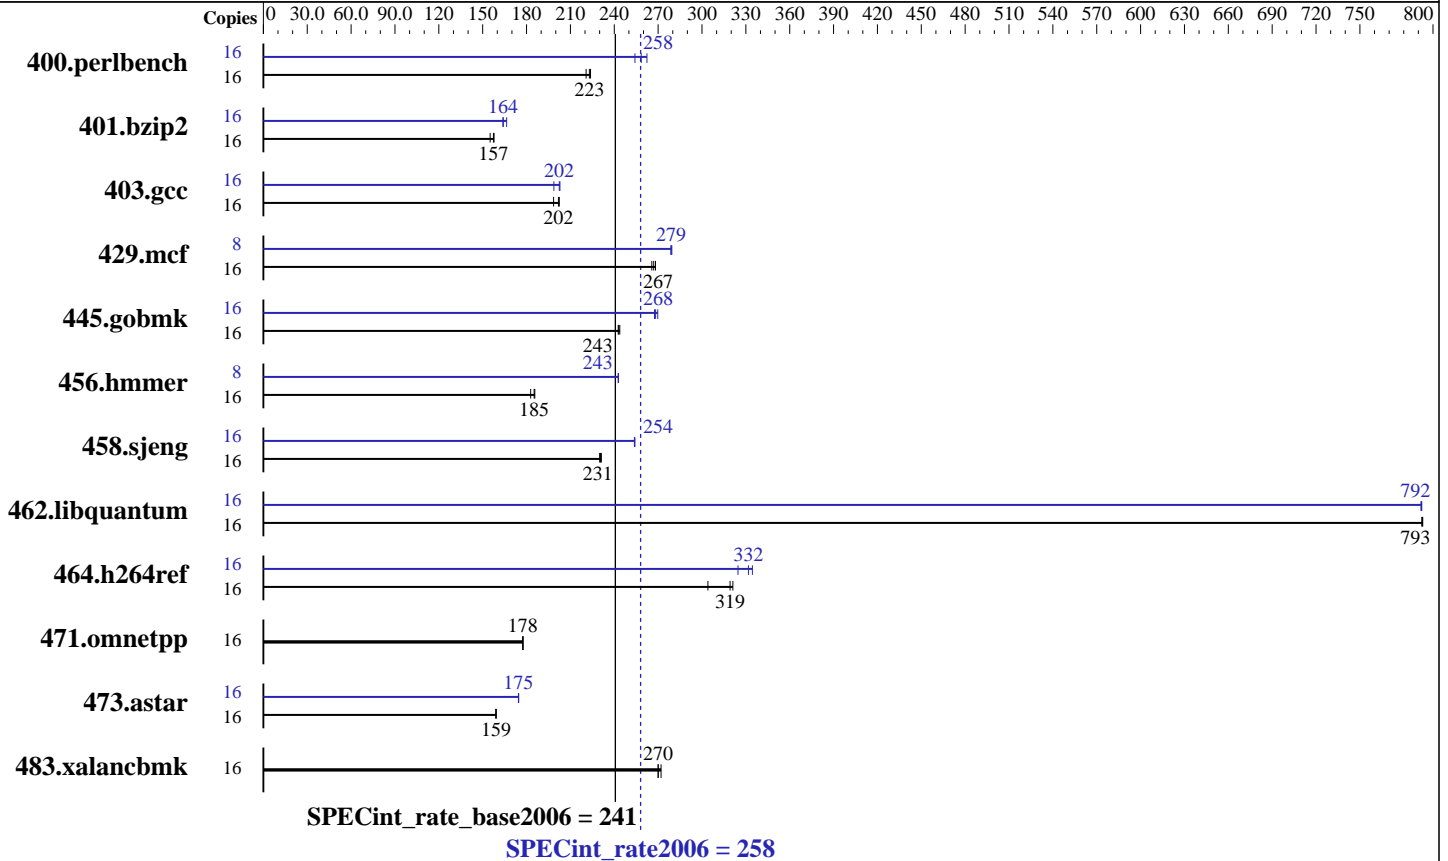

### Hardware

CPU Name: Intel Xeon X5570  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 X 4 GB PC3-10600R, CL=9)  
 Disk Subsystem: HITACHI HDT725050VLA360 500GB SATAII, 7200RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 SP2  
 Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux  
 Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

SPECint\_rate2006 = 258

SPECint\_rate\_base2006 = 241

CPU2006 license: 9016

Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Mar-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	708	221	699	224	<u>701</u>	<u>223</u>	16	615	254	596	262	<u>605</u>	<u>258</u>
401.bzip2	16	995	155	979	158	<u>981</u>	<u>157</u>	16	<u>941</u>	<u>164</u>	942	164	928	166
403.gcc	16	<u>638</u>	<u>202</u>	649	198	636	202	16	635	203	<u>636</u>	<u>202</u>	648	199
429.mcf	16	544	268	549	266	<u>547</u>	<u>267</u>	8	262	279	261	279	<u>262</u>	<u>279</u>
445.gobmk	16	689	244	<u>690</u>	<u>243</u>	692	243	16	622	270	<u>626</u>	<u>268</u>	627	268
456.hammer	16	804	186	<u>806</u>	<u>185</u>	817	183	8	308	243	<u>307</u>	<u>243</u>	307	243
458.sjeng	16	<u>840</u>	<u>231</u>	842	230	838	231	16	763	254	<u>762</u>	<u>254</u>	762	254
462.libquantum	16	418	793	<u>418</u>	<u>793</u>	418	792	16	419	792	<u>419</u>	<u>792</u>	418	792
464.h264ref	16	1103	321	<u>1109</u>	<u>319</u>	1165	304	16	1059	334	<u>1067</u>	<u>332</u>	1091	325
471.omnetpp	16	563	178	<u>563</u>	<u>178</u>	564	177	16	563	178	<u>563</u>	<u>178</u>	564	177
473.astar	16	705	159	706	159	<u>706</u>	<u>159</u>	16	643	175	<u>644</u>	<u>175</u>	644	174
483.xalancbmk	16	406	272	409	270	<u>409</u>	<u>270</u>	16	406	272	409	270	<u>409</u>	<u>270</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:  
Hardware Prefetcher: Enabled  
Adjacent Cache Line Prefetch: Enabled  
Tested system case compliance with Intel EEB 3.61 spec  
SSI Server Power Supply 650W or higher  
System was configured with ASPEED AST2050 VGA (on board VGA)

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 258**

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

**SPECint\_rate\_base2006 = 241**

**CPU2006 license:** 9016

**Test date:** Mar-2009

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2009

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Feb-2009

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 258**

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

**SPECint\_rate\_base2006 = 241**

**CPU2006 license:** 9016

**Test date:** Mar-2009

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2009

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Feb-2009

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

**SPECint\_rate2006 = 258**

**SPECint\_rate\_base2006 = 241**

**CPU2006 license:** 9016

**Test sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test date:** Mar-2009

**Hardware Availability:** Mar-2009

**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 23:23:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 March 2009.