



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®2006 = 23.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint_base2006 = 21.9

CPU2006 license: 13


Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

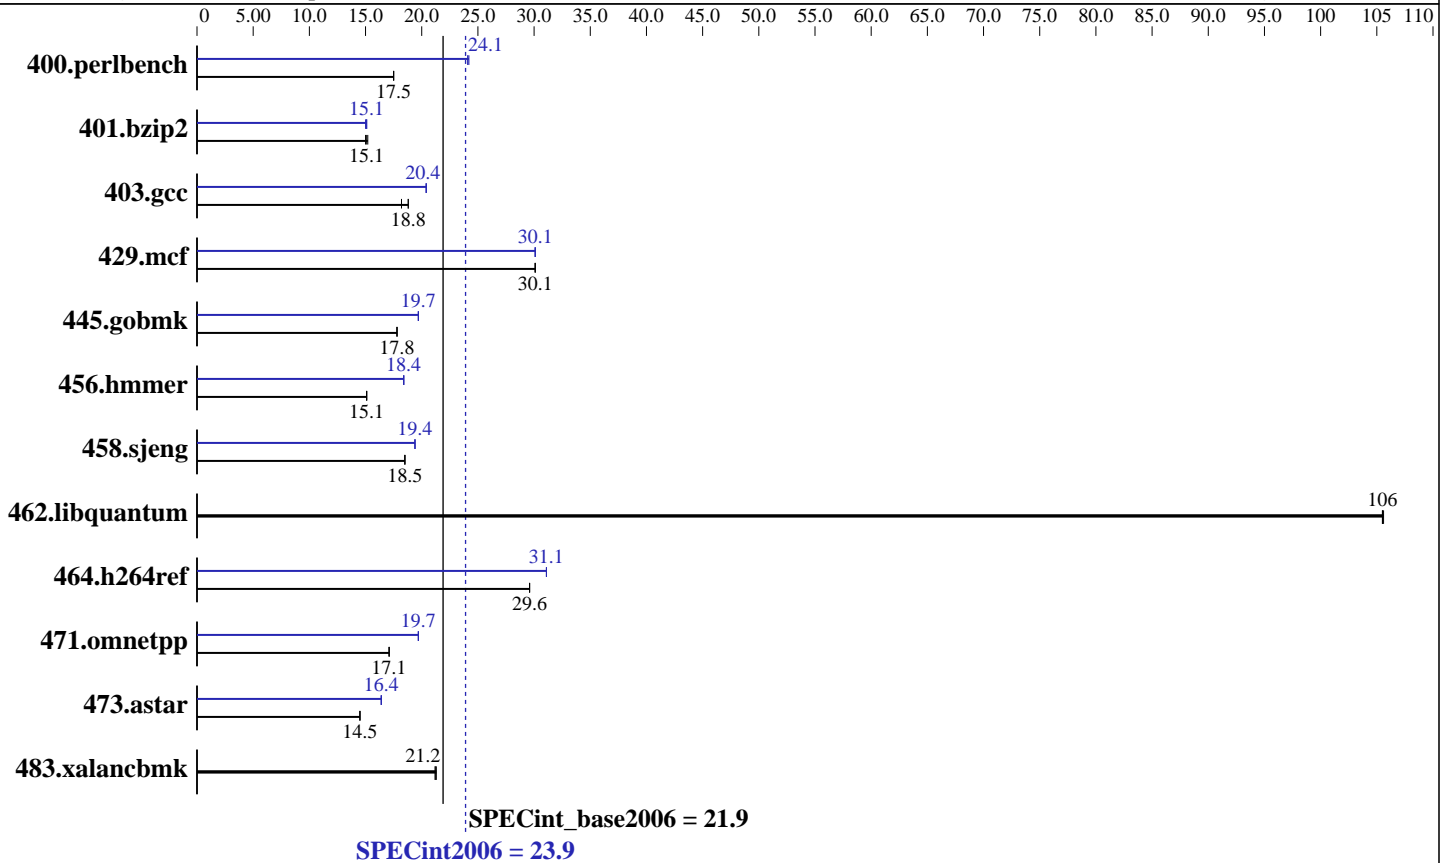

Hardware

CPU Name: Intel Core 2 Duo E8200
 CPU Characteristics:
 CPU MHz: 2666
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (4x1GB DDR2-800 CL5)
 Disk Subsystem: Seagate 320 GB SATA, 7200RPM
 Other Hardware: None

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.1 from
<http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint_base2006 = 21.9

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>559</u>	<u>17.5</u>	559	17.5	559	17.5	404	24.2	<u>405</u>	<u>24.1</u>	405	24.1
401.bzip2	<u>637</u>	<u>15.1</u>	635	15.2	642	15.0	642	15.0	<u>640</u>	<u>15.1</u>	639	15.1
403.gcc	428	18.8	443	18.2	<u>428</u>	<u>18.8</u>	395	20.4	<u>395</u>	<u>20.4</u>	395	20.4
429.mcf	303	30.1	<u>303</u>	<u>30.1</u>	303	30.1	303	30.1	<u>303</u>	<u>30.1</u>	303	30.1
445.gobmk	589	17.8	<u>589</u>	<u>17.8</u>	590	17.8	<u>534</u>	<u>19.7</u>	534	19.7	534	19.7
456.hammer	618	15.1	617	15.1	<u>617</u>	<u>15.1</u>	506	18.4	506	18.4	<u>506</u>	<u>18.4</u>
458.sjeng	<u>654</u>	<u>18.5</u>	654	18.5	654	18.5	624	19.4	<u>624</u>	<u>19.4</u>	624	19.4
462.libquantum	<u>196</u>	<u>106</u>	196	106	196	106	<u>196</u>	<u>106</u>	196	106	196	106
464.h264ref	<u>748</u>	<u>29.6</u>	748	29.6	748	29.6	<u>712</u>	<u>31.1</u>	712	31.1	712	31.1
471.omnetpp	365	17.1	<u>365</u>	<u>17.1</u>	366	17.1	317	19.7	<u>317</u>	<u>19.7</u>	317	19.7
473.astar	486	14.5	<u>486</u>	<u>14.5</u>	486	14.5	428	16.4	427	16.4	<u>428</u>	<u>16.4</u>
483.xalancbmk	325	21.3	325	21.2	<u>325</u>	<u>21.2</u>	325	21.3	325	21.2	<u>325</u>	<u>21.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
 Antec Truepower Trio power supply TP3-650
 Binaries were built on Windows Vista Ultimate (32-bit)
 Binaries were built on Windows Vista Ultimate (32-bit)
 OMP_NUM_THREADS set to number of logical processors as seen by the OS
 KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qc99

C++ benchmarks:
 icl -Qvc9

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
 464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
 483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint_base2006 = 21.9

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qpar-runtime-control -Qvec-guard-write /F512000000

C++ benchmarks:

-QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalanbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F512000000

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint_base2006 = 21.9

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

429.mcf: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmcr: -QxSSE4.1 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
/F512000000

458.sjeng: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

473.astar: -QxSSE4.1(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 23.9

Intel DQ45CB motherboard (Intel Core 2 Duo E8200)

SPECint_base2006 = 21.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:10:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.