



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp®2006 = 35.2

PRIMERGY RX600 S5, Intel Xeon L7545, 1.87 GHz

SPECfp\_base2006 = 31.7

CPU2006 license: 19


Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

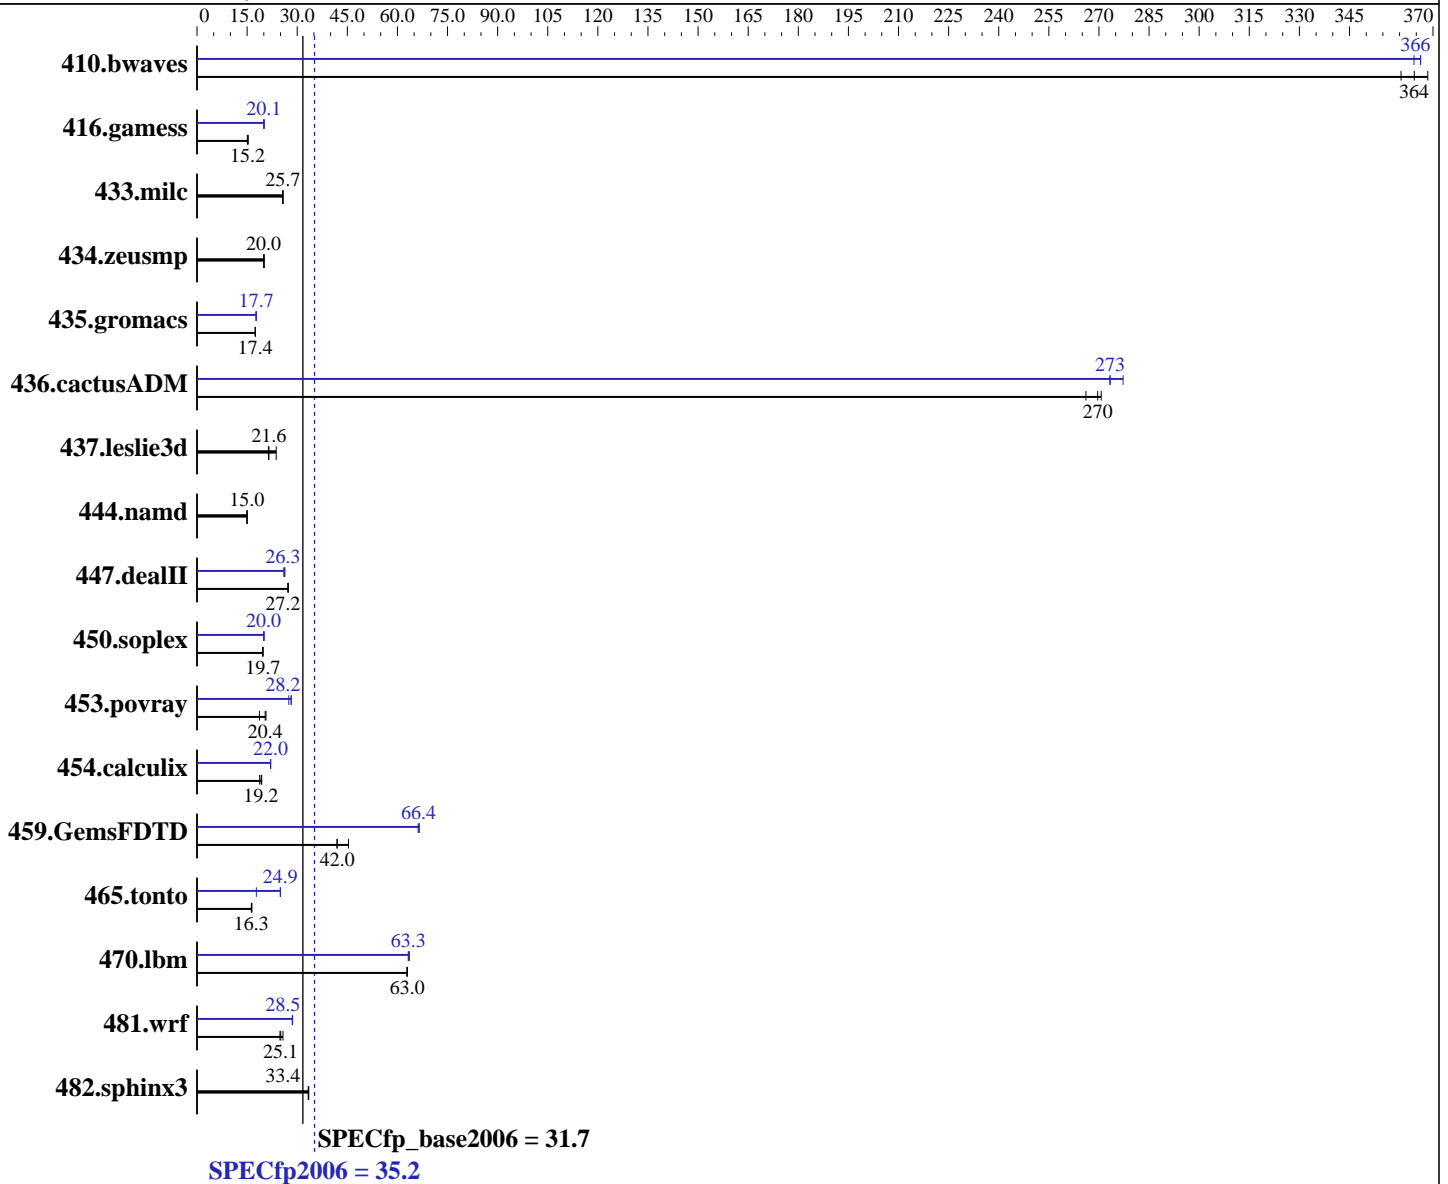

**Hardware**

CPU Name: Intel Xeon L7545  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz  
 CPU MHz: 1867  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip  
 CPU(s) orderable: 2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

**Software**

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **35.2**

PRIMERGY RX600 S5, Intel Xeon L7545, 1.87 GHz

SPECfp\_base2006 = **31.7**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

L3 Cache: 18 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (64x8 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	37.7	360	36.9	368	<b>37.3</b>	<b>364</b>	<b>37.1</b>	<b>366</b>	37.1	366	37.3	364
416.gamess	1277	15.3	1300	15.1	<b>1288</b>	<b>15.2</b>	982	19.9	<b>974</b>	<b>20.1</b>	974	20.1
433.milc	357	25.7	357	25.7	<b>357</b>	<b>25.7</b>	357	25.7	357	25.7	<b>357</b>	<b>25.7</b>
434.zeusmp	<b>455</b>	<b>20.0</b>	452	20.1	455	20.0	<b>455</b>	<b>20.0</b>	452	20.1	455	20.0
435.gromacs	409	17.5	<b>409</b>	<b>17.4</b>	409	17.4	<b>403</b>	<b>17.7</b>	404	17.7	403	17.7
436.cactusADM	44.1	271	44.9	266	<b>44.3</b>	<b>270</b>	43.1	277	43.7	273	<b>43.7</b>	<b>273</b>
437.leslie3d	440	21.4	397	23.7	<b>436</b>	<b>21.6</b>	440	21.4	397	23.7	<b>436</b>	<b>21.6</b>
444.namd	<b>535</b>	<b>15.0</b>	535	15.0	535	15.0	<b>535</b>	<b>15.0</b>	535	15.0	535	15.0
447.dealII	<b>420</b>	<b>27.2</b>	420	27.2	419	27.3	<b>436</b>	<b>26.3</b>	435	26.3	441	26.0
450.soplex	<b>423</b>	<b>19.7</b>	422	19.8	424	19.7	418	20.0	<b>417</b>	<b>20.0</b>	415	20.1
453.povray	<b>261</b>	<b>20.4</b>	258	20.7	285	18.7	189	28.2	<b>189</b>	<b>28.2</b>	194	27.5
454.calculix	<b>430</b>	<b>19.2</b>	426	19.4	440	18.8	375	22.0	374	22.1	<b>375</b>	<b>22.0</b>
459.GemsFDTD	234	45.3	<b>253</b>	<b>42.0</b>	253	41.9	159	66.5	160	66.2	<b>160</b>	<b>66.4</b>
465.tonto	605	16.3	598	16.5	<b>604</b>	<b>16.3</b>	554	17.8	<b>394</b>	<b>24.9</b>	394	24.9
470.lbm	<b>218</b>	<b>63.0</b>	218	63.0	219	62.8	216	63.6	217	63.3	<b>217</b>	<b>63.3</b>
481.wrf	434	25.7	450	24.8	<b>445</b>	<b>25.1</b>	<b>391</b>	<b>28.5</b>	390	28.6	391	28.5
482.sphinx3	583	33.4	<b>584</b>	<b>33.4</b>	586	33.3	<b>583</b>	<b>33.4</b>	<b>584</b>	<b>33.4</b>	586	33.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 978 MHz.  
BIOS configuration:  
Intel HT Technology = Disable

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 35.2**

PRIMERGY RX600 S5, Intel Xeon L7545, 1.87 GHz

**SPECfp\_base2006 = 31.7**

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2010  
Hardware Availability: Jun-2010  
Software Availability: Jan-2010

## General Notes (Continued)

For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 35.2**

PRIMERGY RX600 S5, Intel Xeon L7545, 1.87 GHz

**SPECfp\_base2006 = 31.7**

CPU2006 license: 19

Test date: Jun-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 35.2**

PRIMERGY RX600 S5, Intel Xeon L7545, 1.87 GHz

**SPECfp\_base2006 = 31.7**

**CPU2006 license:** 19

**Test date:** Jun-2010

**Test sponsor:** Fujitsu

**Hardware Availability:** Jun-2010

**Tested by:** Fujitsu

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 35.2

PRIMERGY RX600 S5, Intel Xeon L7545, 1.87 GHz

SPECfp\_base2006 = 31.7

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 11:08:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 July 2010.