



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5506)

SPECfp®2006 = 29.0

SPECfp\_base2006 = 27.6

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

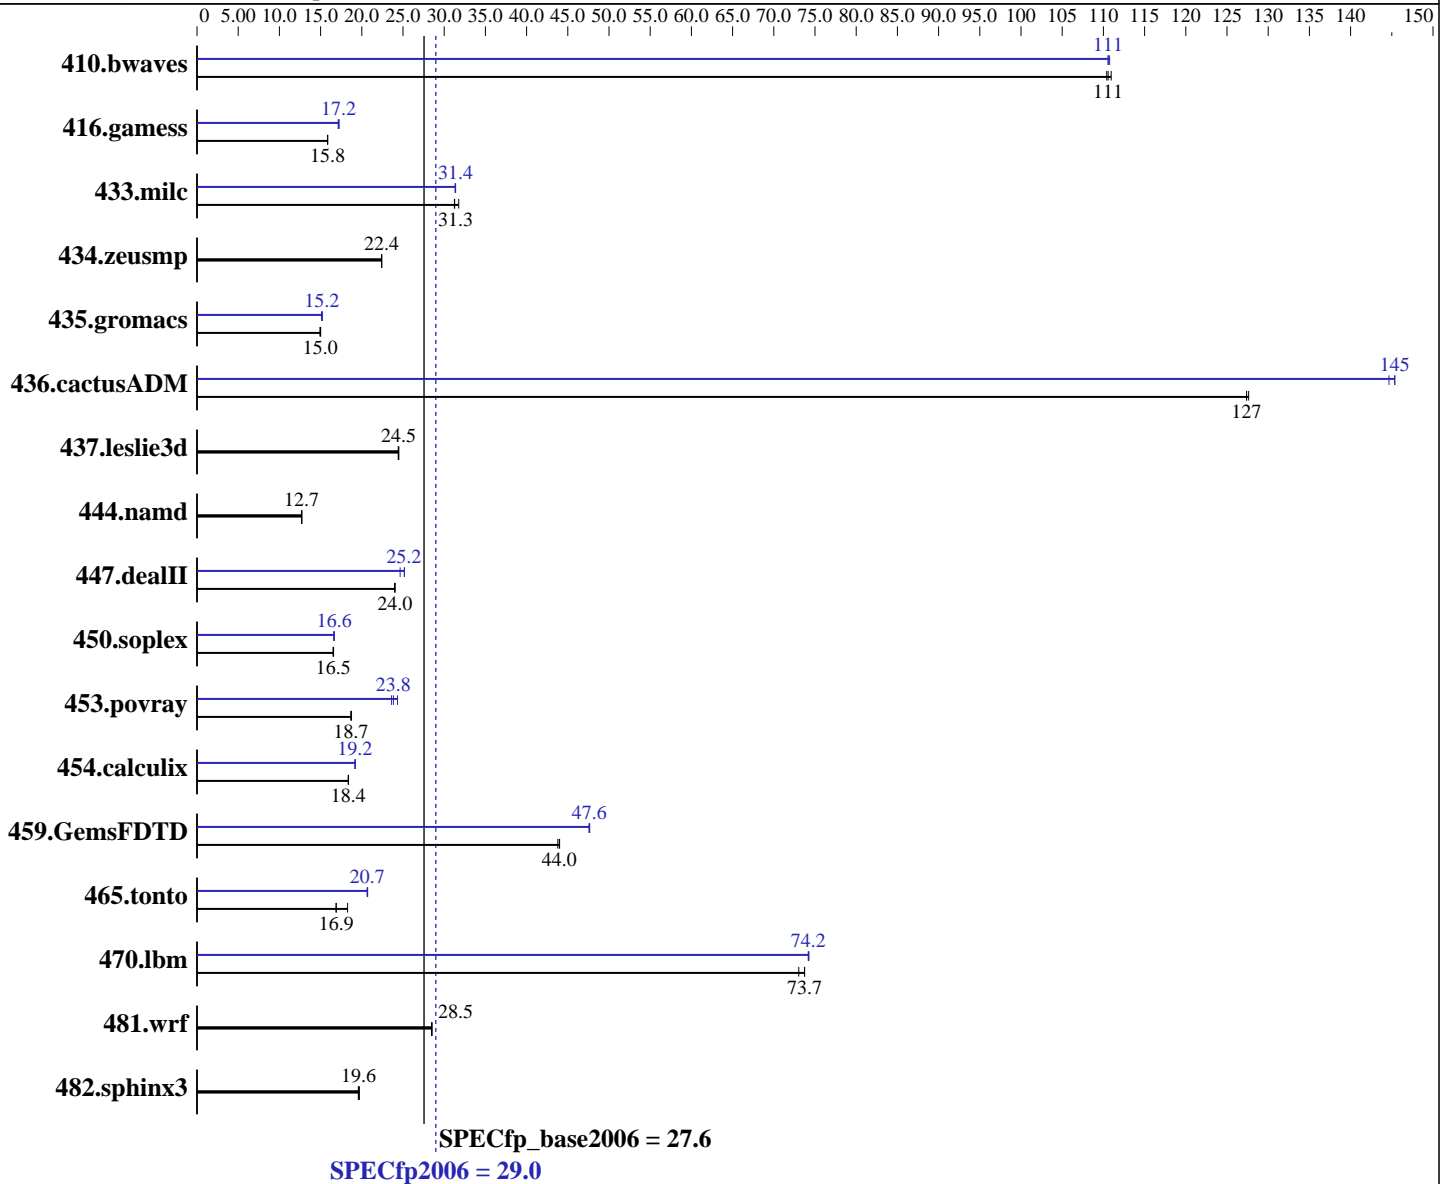

### Hardware

CPU Name: Intel Xeon E5506  
 CPU Characteristics:  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: I\_cproc\_p\_11.1.064, I\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5506)

SPECfp2006 = **29.0**

SPECfp\_base2006 = **27.6**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB PC3L-10600R, 2 rank, CL9, ECC, running at 800 MHz)  
Disk Subsystem: 1x160 GB SATA, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	123	110	<b>123</b>	<b>111</b>	122	111	<b>123</b>	<b>111</b>	123	111	123	111
416.gamess	1234	15.9	<b>1236</b>	<b>15.8</b>	1236	15.8	<b>1139</b>	<b>17.2</b>	1136	17.2	1143	17.1
433.milc	294	31.2	289	31.8	<b>294</b>	<b>31.3</b>	293	31.3	292	31.4	<b>293</b>	<b>31.4</b>
434.zeusmp	406	22.4	406	22.4	<b>406</b>	<b>22.4</b>	406	22.4	406	22.4	<b>406</b>	<b>22.4</b>
435.gromacs	<b>477</b>	<b>15.0</b>	476	15.0	478	14.9	469	15.2	<b>470</b>	<b>15.2</b>	472	15.1
436.cactusADM	93.8	127	93.6	128	<b>93.8</b>	<b>127</b>	<b>82.2</b>	<b>145</b>	82.6	145	82.2	145
437.leslie3d	385	24.4	384	24.5	<b>384</b>	<b>24.5</b>	385	24.4	384	24.5	<b>384</b>	<b>24.5</b>
444.namd	631	12.7	631	12.7	<b>631</b>	<b>12.7</b>	631	12.7	631	12.7	<b>631</b>	<b>12.7</b>
447.dealII	477	24.0	476	24.0	<b>476</b>	<b>24.0</b>	<b>455</b>	<b>25.2</b>	464	24.7	454	25.2
450.soplex	505	16.5	503	16.6	<b>504</b>	<b>16.5</b>	<b>501</b>	<b>16.6</b>	500	16.7	503	16.6
453.povray	285	18.7	284	18.8	<b>285</b>	<b>18.7</b>	225	23.6	219	24.3	<b>223</b>	<b>23.8</b>
454.calculix	449	18.4	<b>449</b>	<b>18.4</b>	449	18.4	<b>430</b>	<b>19.2</b>	430	19.2	430	19.2
459.GemsFDTD	241	44.0	242	43.8	<b>241</b>	<b>44.0</b>	223	47.6	<b>223</b>	<b>47.6</b>	223	47.7
465.tonto	<b>582</b>	<b>16.9</b>	538	18.3	583	16.9	475	20.7	477	20.6	<b>476</b>	<b>20.7</b>
470.lbm	188	73.0	<b>186</b>	<b>73.7</b>	186	73.7	185	74.3	<b>185</b>	<b>74.2</b>	185	74.2
481.wrf	<b>392</b>	<b>28.5</b>	391	28.5	393	28.5	<b>392</b>	<b>28.5</b>	391	28.5	393	28.5
482.sphinx3	996	19.6	989	19.7	<b>993</b>	<b>19.6</b>	996	19.6	989	19.7	<b>993</b>	<b>19.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:  
NUMA configuration : Disabled

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/GT120b  
(Intel Xeon E5506)

**SPECfp2006 = 29.0**

**SPECfp\_base2006 = 27.6**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Jul-2010  
**Hardware Availability:** Jun-2010  
**Software Availability:** Dec-2009

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/GT120b  
(Intel Xeon E5506)

**SPECfp2006 = 29.0**

**SPECfp\_base2006 = 27.6**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Dec-2009

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/GT120b  
(Intel Xeon E5506)

**SPECfp2006 = 29.0**

**SPECfp\_base2006 = 27.6**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-alloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100823.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100823.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5506)

SPECfp2006 = 29.0

SPECfp\_base2006 = 27.6

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jul-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:33:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 August 2010.