



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5650, 2.67 GHz

**SPECfp®\_rate2006 = 124**

**SPECfp\_rate\_base2006 = 119**

CPU2006 license: 19


Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Oct-2010

Tested by: Fujitsu

Software Availability: Jan-2010

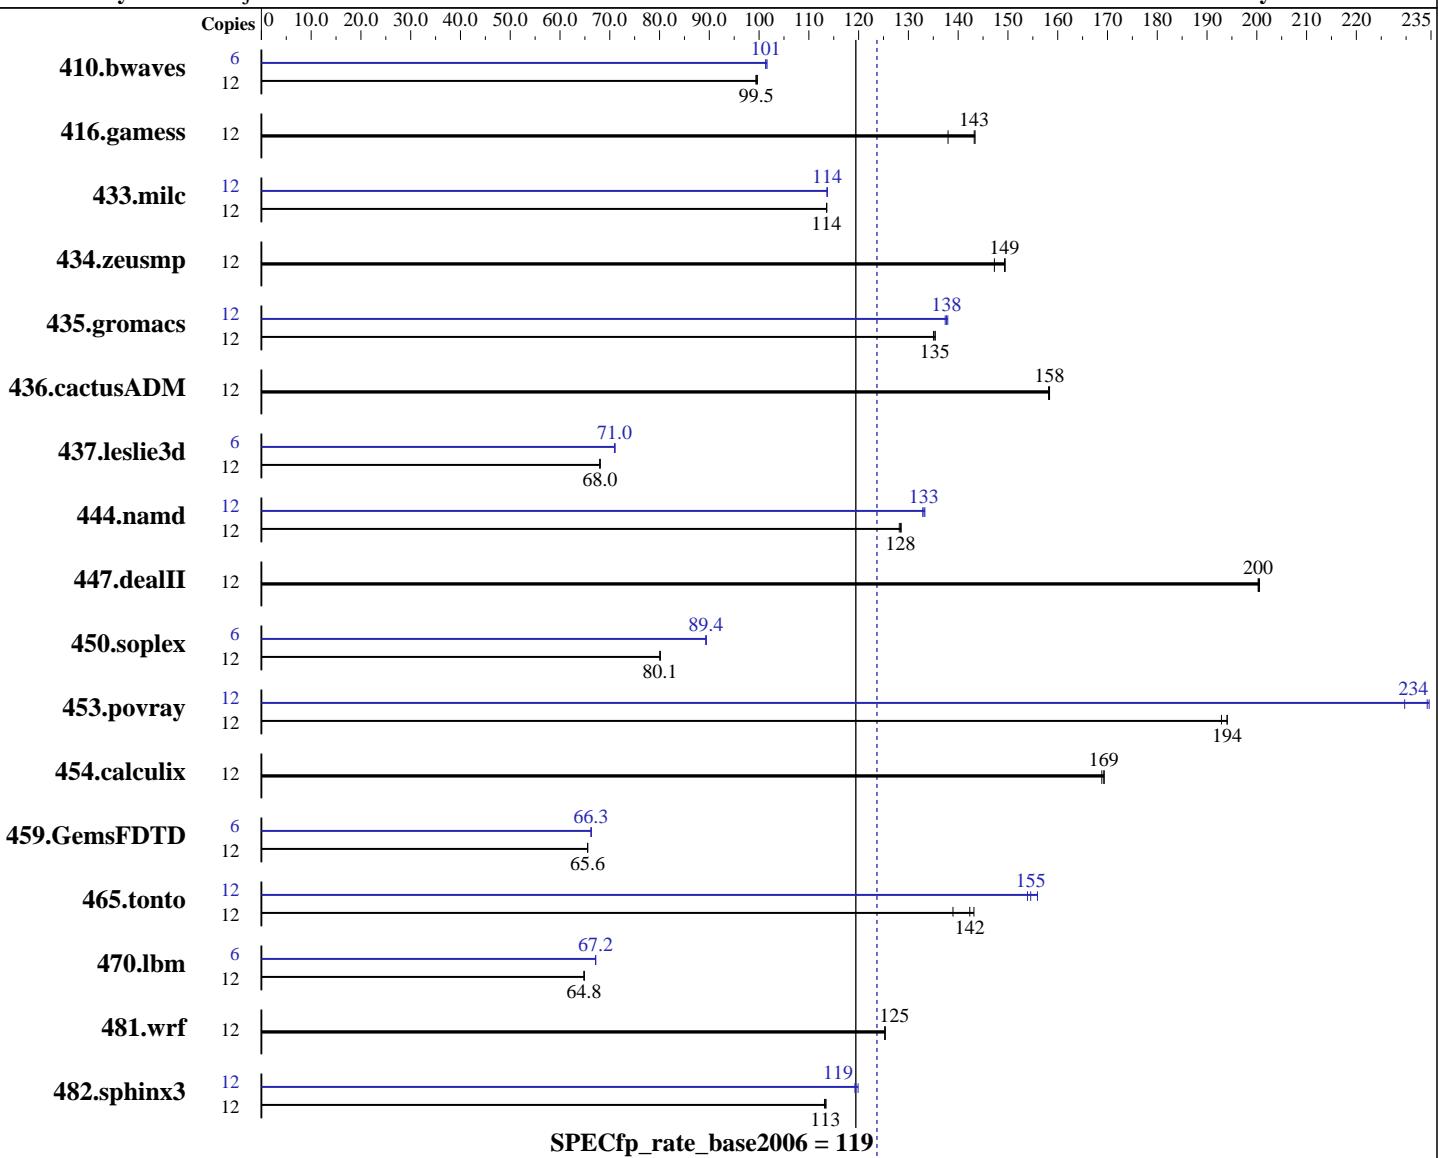

## Hardware

CPU Name: Intel Xeon X5650  
CPU Characteristics: Intel Turbo Boost Technology up to 3.07 GHz  
CPU MHz: 2667  
FPU: Integrated  
CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate2006 = 124**

**SPECfp\_rate\_base2006 = 119**

**CPU2006 license:** 19

**Test date:** Aug-2010

**Test sponsor:** Fujitsu

**Hardware Availability:** Oct-2010

**Tested by:** Fujitsu

**Software Availability:** Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)  
 Disk Subsystem: 1 x SSD SATA, 64 GB  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1636	99.7	<b>1640</b>	<b>99.5</b>	1641	99.4	6	805	101	803	102	<b>804</b>	<b>101</b>
416.gamess	12	1703	138	<b>1641</b>	<b>143</b>	1638	143	12	1703	138	<b>1641</b>	<b>143</b>	1638	143
433.milc	12	970	114	970	114	<b>970</b>	<b>114</b>	12	<b>969</b>	<b>114</b>	969	114	969	114
434.zeusmp	12	<b>731</b>	<b>149</b>	731	149	741	147	12	<b>731</b>	<b>149</b>	731	149	741	147
435.gromacs	12	<b>633</b>	<b>135</b>	635	135	633	135	12	<b>622</b>	<b>138</b>	621	138	624	137
436.cactusADM	12	<b>906</b>	<b>158</b>	906	158	907	158	12	<b>906</b>	<b>158</b>	906	158	907	158
437.leslie3d	12	1657	68.1	<b>1658</b>	<b>68.0</b>	1659	68.0	6	<b>794</b>	71.1	795	70.9	<b>794</b>	<b>71.0</b>
444.namd	12	<b>749</b>	<b>128</b>	751	128	749	129	12	722	133	724	133	<b>723</b>	<b>133</b>
447.dealII	12	685	200	685	201	<b>685</b>	<b>200</b>	12	685	200	685	201	<b>685</b>	<b>200</b>
450.soplex	12	1249	80.1	<b>1249</b>	<b>80.1</b>	1250	80.1	6	560	89.4	560	89.3	<b>560</b>	<b>89.4</b>
453.povray	12	331	193	<b>329</b>	<b>194</b>	329	194	12	<b>273</b>	<b>234</b>	278	230	272	235
454.calculix	12	586	169	<b>585</b>	<b>169</b>	585	169	12	586	169	<b>585</b>	<b>169</b>	585	169
459.GemsFDTD	12	1942	65.6	1943	65.5	<b>1942</b>	<b>65.6</b>	6	961	66.3	<b>961</b>	<b>66.3</b>	961	66.3
465.tonto	12	850	139	<b>830</b>	<b>142</b>	825	143	12	<b>764</b>	<b>155</b>	757	156	767	154
470.lbm	12	<b>2543</b>	<b>64.8</b>	2543	64.8	2542	64.9	6	1228	67.1	<b>1228</b>	<b>67.2</b>	1227	67.2
481.wrf	12	1070	125	<b>1070</b>	<b>125</b>	1069	125	12	1070	125	<b>1070</b>	<b>125</b>	1069	125
482.sphinx3	12	2062	113	<b>2063</b>	<b>113</b>	2067	113	12	<b>1951</b>	120	<b>1958</b>	<b>119</b>	1961	119

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>  
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate2006 = 124**

CPU2006 license: 19

Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Oct-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate2006 = 124**

CPU2006 license: 19

**Test date:** Aug-2010

Test sponsor: Fujitsu

**Hardware Availability:** Oct-2010

Tested by: Fujitsu

**Software Availability:** Jan-2010

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate2006 = 124**

CPU2006 license: 19

Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Oct-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Obo

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX922 S2, Intel Xeon X5650, 2.67 GHz

**SPECfp\_rate2006 = 124**

**SPECfp\_rate\_base2006 = 119**

**CPU2006 license:** 19

**Test date:** Aug-2010

**Test sponsor:** Fujitsu

**Hardware Availability:** Oct-2010

**Tested by:** Fujitsu

**Software Availability:** Jan-2010

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 10:04:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 September 2010.