



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp®\_rate2006 = 10400

### IBM Power 795 (4.0 GHz, 256 core, SLES)

SPECfp\_rate\_base2006 = 9370

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2010

Hardware Availability: Sep-2010

Software Availability: Aug-2010

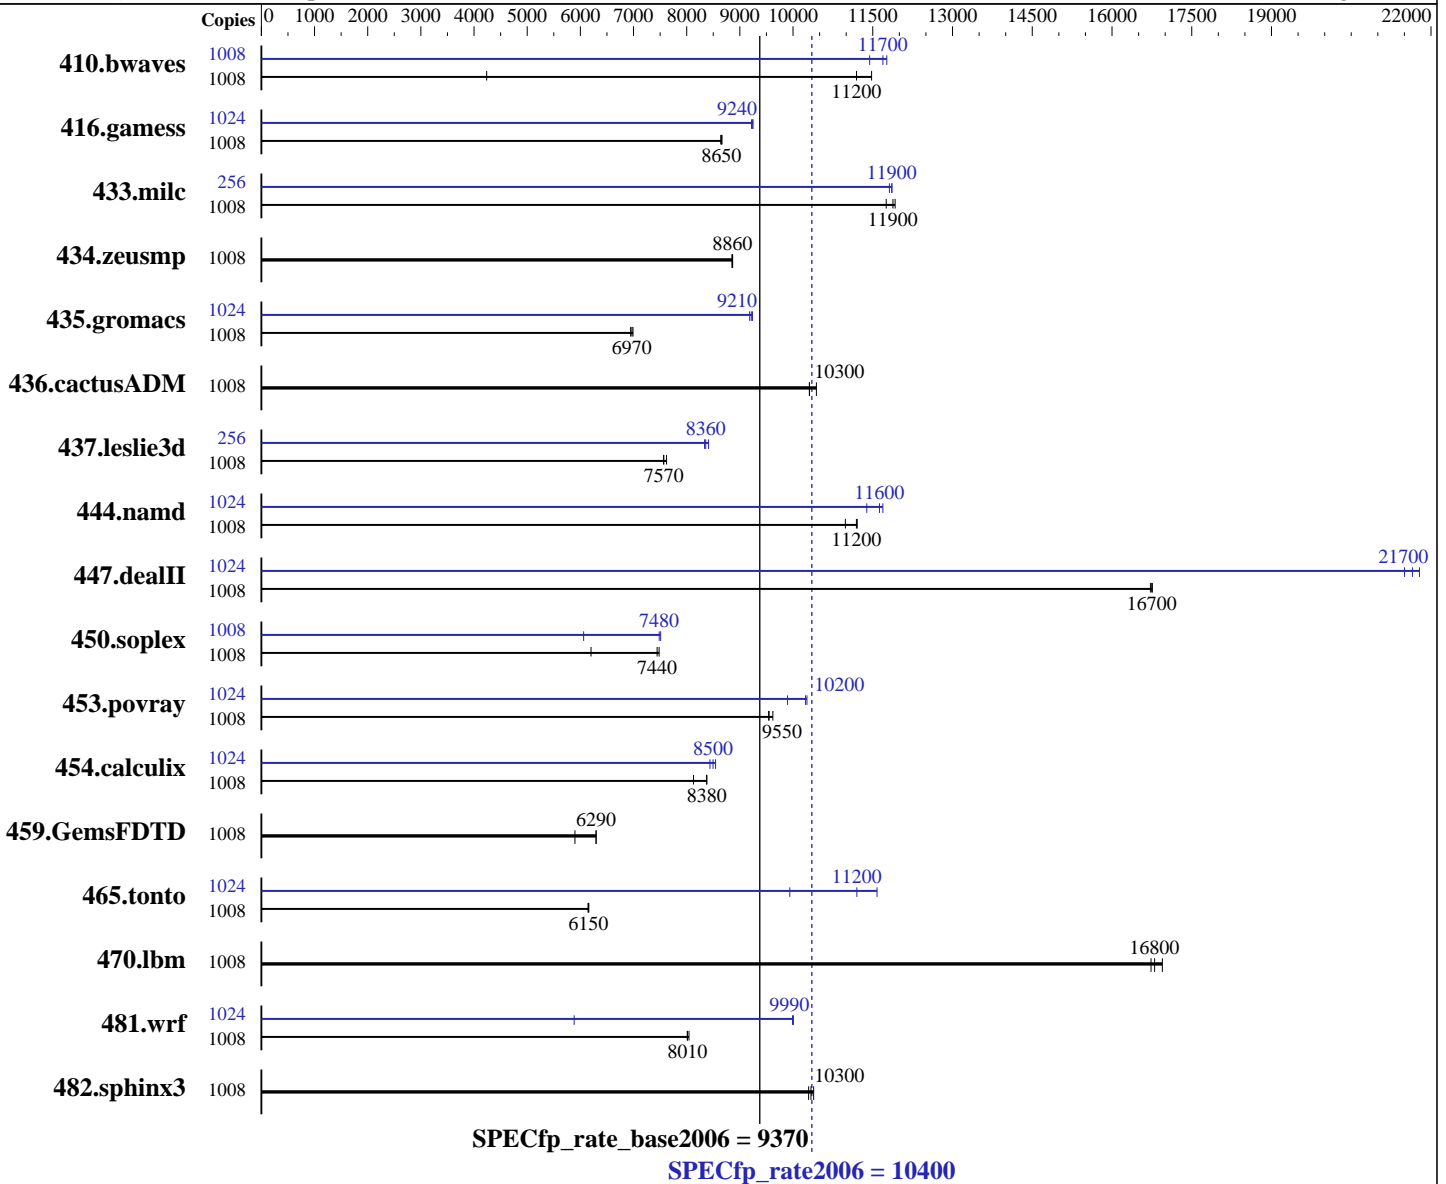

#### Hardware

CPU Name: POWER7  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.14 GHz  
 CPU MHz: 4004  
 FPU: Integrated  
 CPU(s) enabled: 256 cores, 32 chips, 8 cores/chip, 4 threads/core  
 CPU(s) orderable: 32,64,96,128,160,192,224,256 cores  
 Primary Cache: 32 KB I + 32 KB D on chip per core

Continued on next page

#### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (ppc64), Kernel 2.6.32.12-0.7-ppc64  
 Compiler: IBM XL C/C++ for Linux, V11.1  
 IBM XL Fortran for Linux, V13.1  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 32-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp\_rate2006 = 10400

## IBM Power 795 (4.0 GHz, 256 core, SLES)

SPECfp\_rate\_base2006 = 9370

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2010

Hardware Availability: Sep-2010

Software Availability: Aug-2010

Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per core  
 Other Cache: None  
 Memory: 2 TB (256x8 GB) DDR3 1066 MHz  
 Disk Subsystem: 17x146.8 GB Raid0 SAS SFF 15K RPM  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: -Post-Link Optimization for Linux on POWER, Version 5.5.0-3  
 -MicroQuill SmartHeap 9  
 -Apache C++ Standard Library V4.2.1

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	1008	3232	4240	1194	11500	<b>1224</b>	<b>11200</b>	1008	<b>1172</b>	<b>11700</b>	1197	11400	1164	11800
416.gamess	1008	<b>2281</b>	<b>8650</b>	2278	8660	2284	8640	1024	2169	9250	<b>2169</b>	<b>9240</b>	2175	9220
433.milc	1008	787	11800	776	11900	<b>779</b>	<b>11900</b>	256	<b>198</b>	<b>11900</b>	199	11800	198	11900
434.zeusmp	1008	<b>1035</b>	<b>8860</b>	1036	8850	1035	8860	1008	<b>1035</b>	<b>8860</b>	1036	8850	1035	8860
435.gromacs	1008	1036	6950	1030	6990	<b>1033</b>	<b>6970</b>	1024	796	9180	792	9240	<b>793</b>	<b>9210</b>
436.cactusADM	1008	1169	10300	1154	10400	<b>1168</b>	<b>10300</b>	1008	1169	10300	1154	10400	<b>1168</b>	<b>10300</b>
437.leslie3d	1008	1252	7570	1243	7620	<b>1252</b>	<b>7570</b>	256	289	8340	<b>288</b>	<b>8360</b>	286	8410
444.namd	1008	736	11000	<b>722</b>	<b>11200</b>	721	11200	1024	721	11400	<b>706</b>	<b>11600</b>	703	11700
447.dealII	1008	<b>689</b>	<b>16700</b>	690	16700	688	16800	1024	545	21500	<b>541</b>	<b>21700</b>	538	21800
450.soplex	1008	1356	6200	<b>1129</b>	<b>7440</b>	1124	7480	1008	1387	6060	<b>1123</b>	<b>7480</b>	1119	7510
453.povray	1008	562	9540	557	9620	<b>562</b>	<b>9550</b>	1024	550	9900	531	10300	<b>532</b>	<b>10200</b>
454.calculix	1008	993	8380	<b>993</b>	<b>8380</b>	1023	8130	1024	989	8540	<b>994</b>	<b>8500</b>	1001	8440
459.GemsFDTD	1008	1813	5900	1698	6300	<b>1699</b>	<b>6290</b>	1008	1813	5900	1698	6300	<b>1699</b>	<b>6290</b>
465.tonto	1008	1610	6160	1614	6140	<b>1612</b>	<b>6150</b>	1024	1014	9940	870	11600	<b>900</b>	<b>11200</b>
470.lbm	1008	<b>824</b>	<b>16800</b>	817	16900	828	16700	1008	<b>824</b>	<b>16800</b>	817	16900	828	16700
481.wrf	1008	1400	8040	1406	8010	<b>1405</b>	<b>8010</b>	1024	1944	5880	1143	10000	<b>1145</b>	<b>9990</b>
482.sphinx3	1008	1909	10300	1891	10400	<b>1901</b>	<b>10300</b>	1008	1909	10300	1891	10400	<b>1901</b>	<b>10300</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Tuning Notes

fdpr binary optimization tool used for:  
 433.milc 435.gromacs 436.cactusADM 450.soplex 482.sphinx3  
 with options -O4 -nodp  
 434.zeusmp  
 with options -O4 -vrox -nodp  
 437.leslie3d 444.namd  
 with options -O3 -lu -1 -nodp -sdp 9  
 465.tonto  
 with options -O4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 10400

IBM Power 795 (4.0 GHz, 256 core, SLES)

SPECfp\_rate\_base2006 = 9370

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2010

Hardware Availability: Sep-2010

Software Availability: Aug-2010

## Submit Notes

The config file option 'submit' was used.  
Benchmarks bound to a processor using numactl on the submit command.

## Operating System Notes

ulimit -s (stack) set to 1048576.  
Large pages reserved as follows by root user:  
echo 67584 > /proc/sys/vm/nr\_overcommit\_hugepages  
The following environment variables were set before the runspec command:  
export HUGETLB\_VERBOSE=0  
export HUGETLB\_MORECORE=yes  
export HUGETLB\_ELFMAP=W  
export XLFRTEOPTS=intrinthds=1

## General Notes

447.dealIII (peak): "apache\_stdccxx\_4\_2\_1" src.alt was used.

The Apache C++ Standard Library V4.2.1 was installed from  
<http://stdccxx.apache.org/download.html> using:  
gmake BUILDTYPE=8d CONFIG=gcc.config

## Base Compiler Invocation

C benchmarks:  
xlc -qlanglvl=extc99

C++ benchmarks:  
xlc

Fortran benchmarks:  
xlf95

Benchmarks using both Fortran and C:  
xlc -qlanglvl=extc99 xlf95

## Base Portability Flags

410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 10400

IBM Power 795 (4.0 GHz, 256 core, SLES)

SPECfp\_rate\_base2006 = 9370

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Base Portability Flags (Continued)

454.calculix: -qfixed -qextname  
481.wrf: -DNOUNDERSCORE  
482.sphinx3: -qchars=signed

## Base Optimization Flags

C benchmarks:

-O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

C++ benchmarks:

-O5 -qarch=pwr7 -qtune=pwr7 -qrtti -lhugetlbfs

Fortran benchmarks:

-O5 -qarch=pwr7 -qtune=pwr7 -qsmallstack=dynlenonheap -qalias=nostd  
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

Benchmarks using both Fortran and C:

-O5 -qarch=pwr7 -qtune=pwr7 -qsmallstack=dynlenonheap -qalias=nostd  
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

## Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

## Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

x1C

Fortran benchmarks:

x1f95

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 10400

IBM Power 795 (4.0 GHz, 256 core, SLES)

SPECfp\_rate\_base2006 = 9370

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

xlc -qlanglvl=extc99 xlf95

## Peak Portability Flags

410.bwaves: -qfixed  
 416.gamess: -qfixed  
 434.zeusmp: -qfixed  
 435.gromacs: -qfixed -qextname  
 436.cactusADM: -qfixed -qextname  
 437.leslie3d: -qfixed  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -qfixed -qextname  
 481.wrf: -DNOUNDERSCORE  
 482.sphinx3: -qchars=signed

## Peak Optimization Flags

C benchmarks:

433.milc: -Wl, -q -O5 -qarch=pwr7 -qtune=pwr7 -lhugetlbfs

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -lhugetlbfs

447.dealII: -O4 -qarch=pwr7 -qtune=pwr7 -qrtti  
-qcpp\_stdinc=/root/stdcxx421/include/ansi:/root/stdcxx421/include  
-lsmartheap -lhugetlbfs -L/root/stdcxx421/lib  
-R/root/stdcxx421/lib -lstd8d

450.soplex: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qtune=auto  
-qarch=pwr5 -lhugetlbfs

453.povray: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qsimd -q64 -lsmartheap64

Fortran benchmarks:

410.bwaves: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7 -qtune=pwr7  
-qsmallstack=dynlenonheap -q64 -lhugetlbfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 10400

IBM Power 795 (4.0 GHz, 256 core, SLES)

SPECfp\_rate\_base2006 = 9370

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Aug-2010

## Peak Optimization Flags (Continued)

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7 -qtune=pwr7  
-qalias=nostd -lhugetlbfs

434.zeusmp: basepeak = yes

437.leslie3d: -Wl, -q -O5 -qarch=pwr7 -qtune=pwr7 -q64  
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

459.GemsFDTD: basepeak = yes

465.tonto: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7  
-qtune=pwr7 -qsimd -lhugetlbfs

Benchmarks using both Fortran and C:

435.gromacs: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qarch=pwr7  
-qtune=pwr7 -qsimd -lhugetlbfs

436.cactusADM: basepeak = yes

454.calculix: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qarch=pwr7 -qtune=pwr7  
-B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-align

481.wrf: -O3 -qarch=pwr7 -qtune=pwr7 -q64 -lhugetlbfs

## Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100901.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20100901.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 10400

IBM Power 795 (4.0 GHz, 256 core, SLES)

SPECfp\_rate\_base2006 = 9370

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Aug-2010

Hardware Availability: Sep-2010

Software Availability: Aug-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 12:46:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 September 2010.