



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint[®]_rate2006 = 364

Cisco UCS C210 M2 (Intel Xeon X5670, 2.93 GHz)

SPECint_rate_base2006 = 340

CPU2006 license: 9019


Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

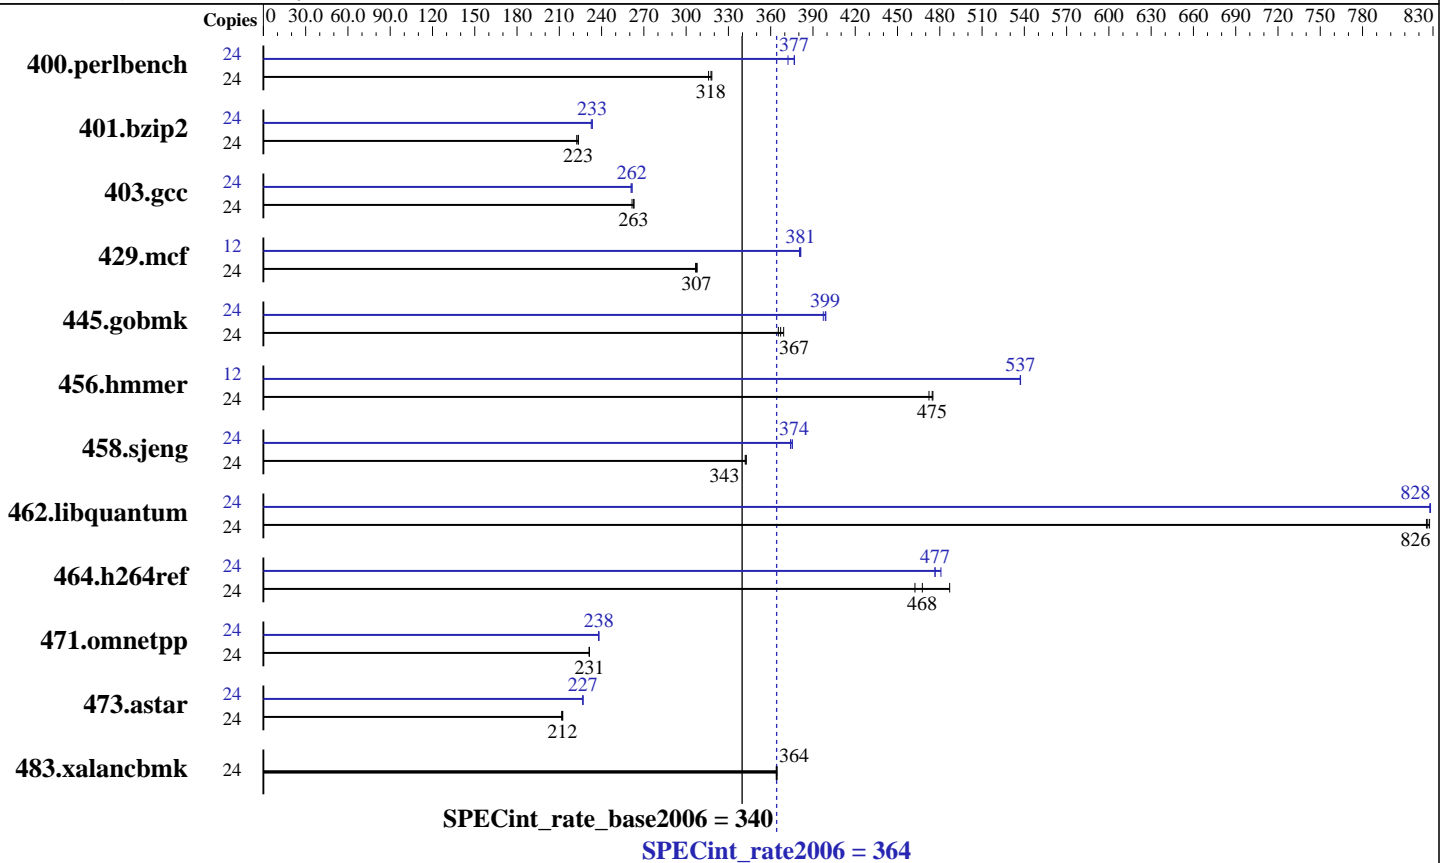

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4GB DDR3-1333 MHz DR RDIMM, CL9, ECC)
 Disk Subsystem: 146 GB SAS, 10K RPM
 Other Hardware: None

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27-15-2-default, RC4
 Compiler: Intel C++ and Fortran Compiler 11.1 IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064 L_cprof_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Binutils 2.16.91.0.7 and MicroQuill SmartHeap Library V8.1 (64-bit)



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 364

Cisco UCS C210 M2 (Intel Xeon X5670, 2.93 GHz)

SPECint_rate_base2006 = 340

CPU2006 license: 9019

Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	742	316	737	318	738	318	24	623	377	630	372	622	377
401.bzip2	24	1042	222	1037	223	1036	224	24	992	233	993	233	995	233
403.gcc	24	735	263	738	262	735	263	24	738	262	739	262	740	261
429.mcf	24	712	307	714	307	711	308	12	287	381	287	381	288	380
445.gobmk	24	682	369	689	365	686	367	24	631	399	634	397	631	399
456.hammer	24	472	475	471	475	474	472	12	208	537	208	537	208	537
458.sjeng	24	848	343	849	342	848	343	24	776	374	773	375	776	374
462.libquantum	24	601	828	603	825	602	826	24	600	828	600	828	601	828
464.h264ref	24	1091	487	1136	468	1149	462	24	1114	477	1114	477	1105	481
471.omnetpp	24	648	231	649	231	648	231	24	630	238	630	238	631	238
473.astar	24	793	212	793	212	796	212	24	743	227	743	227	743	227
483.xalancbmk	24	454	365	455	364	455	364	24	454	365	455	364	455	364

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 364

Cisco UCS C210 M2 (Intel Xeon X5670, 2.93 GHz)

SPECint_rate_base2006 = 340

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Sep-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

`401.bzip2: icc -m64`

`456.hmmer: icc -m64`

`458.sjeng: icc -m64`

`462.libquantum: icc -m64`

C++ benchmarks (except as noted below):

`icpc -m32`

`473.astar: icpc -m64`

Peak Portability Flags

`400.perlbench: -DSPEC_CPU_LINUX_IA32`

`401.bzip2: -DSPEC_CPU_LP64`

`456.hmmer: -DSPEC_CPU_LP64`

`458.sjeng: -DSPEC_CPU_LP64`

`462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

`473.astar: -DSPEC_CPU_LP64`

`483.xalancbmk: -DSPEC_CPU_LINUX`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 364

Cisco UCS C210 M2 (Intel Xeon X5670, 2.93 GHz)

SPECint_rate_base2006 = 340

CPU2006 license: 9019

Test date: Sep-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECint_rate2006 = 364

Cisco UCS C210 M2 (Intel Xeon X5670, 2.93 GHz)

SPECint_rate_base2006 = 340

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Sep-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20100929.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20100929.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:56:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 September 2010.