



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-1012G-MTF,  
AMD Opteron 6164 HE

SPECint®2006 = 16.8

SPECint\_base2006 = 14.2

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

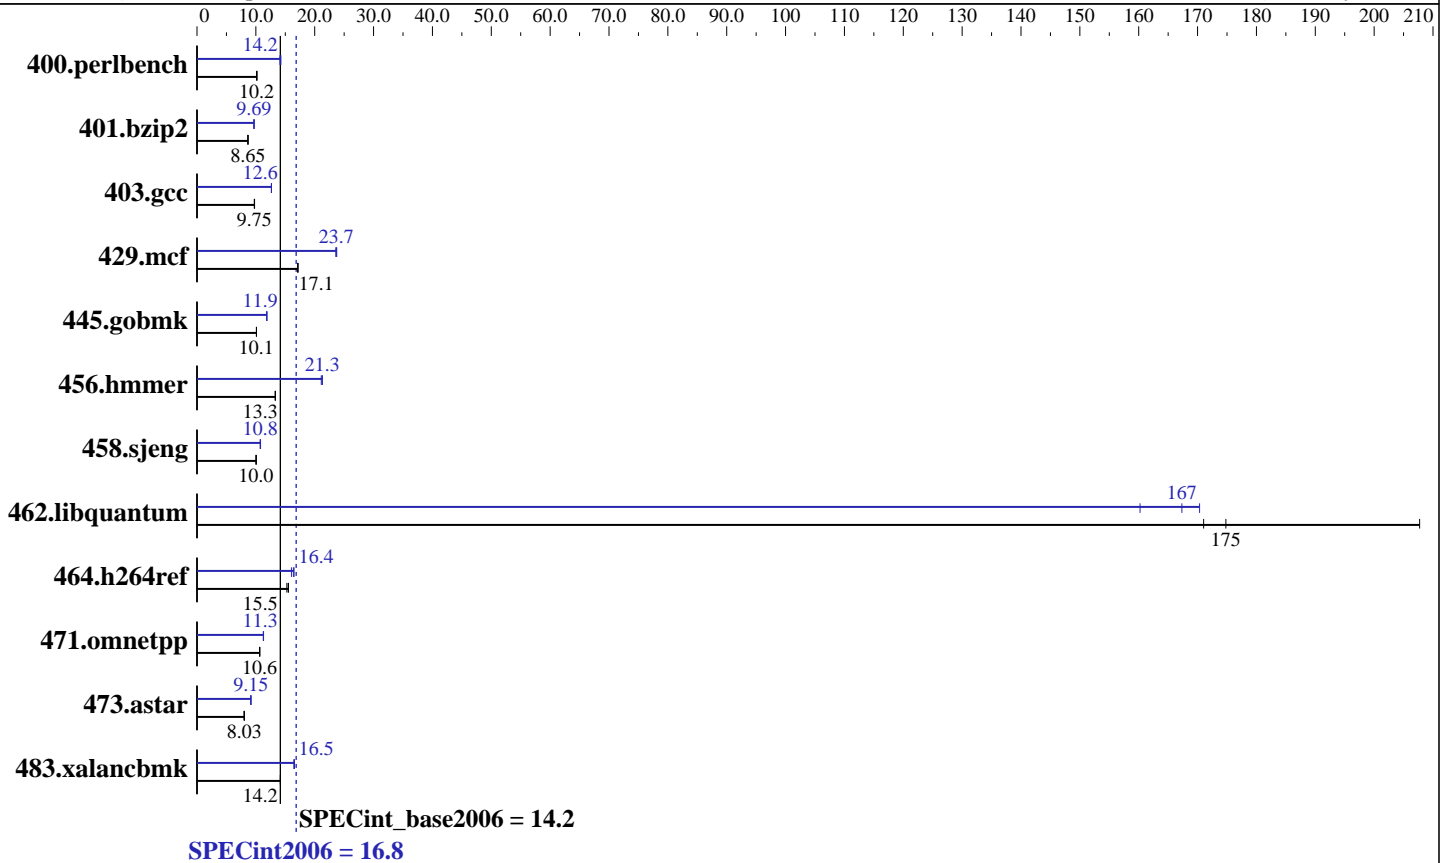

### Hardware

CPU Name: AMD Opteron 6164 HE  
 CPU Characteristics:  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 1 chip, 12 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
 Other Cache: None  
 Memory: 32 GB (8 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.5,  
Kernel 2.6.18-194.el5  
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-1012G-MTF,  
AMD Opteron 6164 HE

SPECint2006 = 16.8

SPECint\_base2006 = 14.2

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Dec-2010  
Hardware Availability: Mar-2010  
Software Availability: May-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	962	10.2	961	10.2	<u>961</u>	<u>10.2</u>	686	14.2	<u>687</u>	<u>14.2</u>	693	14.1
401.bzip2	1117	8.64	<u>1116</u>	<u>8.65</u>	1111	8.69	<u>996</u>	<u>9.69</u>	994	9.71	999	9.66
403.gcc	826	9.75	<u>826</u>	<u>9.75</u>	823	9.78	637	12.6	636	12.7	<u>637</u>	<u>12.6</u>
429.mcf	<u>532</u>	<u>17.1</u>	533	17.1	532	17.2	387	23.6	384	23.7	<u>385</u>	<u>23.7</u>
445.gobmk	1039	10.1	<u>1039</u>	<u>10.1</u>	1038	10.1	884	11.9	885	11.9	<u>885</u>	<u>11.9</u>
456.hammer	<u>701</u>	<u>13.3</u>	700	13.3	702	13.3	<u>439</u>	<u>21.3</u>	442	21.1	438	21.3
458.sjeng	<u>1205</u>	<u>10.0</u>	1206	10.0	1202	10.1	1121	10.8	1128	10.7	<u>1122</u>	<u>10.8</u>
462.libquantum	99.7	208	<u>119</u>	<u>175</u>	121	171	<u>124</u>	<u>167</u>	129	160	122	170
464.h264ref	1424	15.5	<u>1427</u>	<u>15.5</u>	1450	15.3	1379	16.0	1342	16.5	<u>1351</u>	<u>16.4</u>
471.omnetpp	585	10.7	<u>588</u>	<u>10.6</u>	588	10.6	555	11.3	<u>554</u>	<u>11.3</u>	553	11.3
473.astar	<u>875</u>	<u>8.03</u>	875	8.02	874	8.03	765	9.17	768	9.14	<u>767</u>	<u>9.15</u>
483.xalancbmk	<u>487</u>	<u>14.2</u>	486	14.2	487	14.2	<u>418</u>	<u>16.5</u>	419	16.5	417	16.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=2000 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
The system uses a Supermicro H8SGL-F motherboard.

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1002-speed-libs-revA/64:/usr/cpu2006/amd1002-speed-libs-revA/32"  
O64\_OMP\_AFFINITY\_MAP = "0,1,2,3,4,5,6,7,8,9,10,11"  
O64\_OMP\_SPIN\_USER\_LOCK = "true"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-1012G-MTF,  
AMD Opteron 6164 HE

SPECint2006 = 16.8

SPECint\_base2006 = 14.2

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

## General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -Ofast -apo -CG:local\_sched\_alg=1  
-HP:bdt=2m:heap=2m,limit=450 -LNO:parallel\_overhead=10000

C++ benchmarks:  
-march=barcelona -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-1012G-MTF,  
AMD Opteron 6164 HE

SPECint2006 = 16.8

SPECint\_base2006 = 14.2

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Dec-2010  
**Hardware Availability:** Mar-2010  
**Software Availability:** May-2010

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
-CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:alias=disjoint  
-OPT:goto=off -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
-LNO:prefetch\_ahead=10 -CG:cmp\_peep=on -m32  
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
-CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -OPT:keep\_ext=on -ipa -IPA:plimit=750  
-IPA:min\_hotness=300 -IPA:pu\_reorder=1 -LNO:prefetch=1  
-LNO:ignore\_feedback=off -CG:p2align=on  
-CG:unroll\_fb\_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=0  
-OPT:alias=disjoint -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-CG:local\_sched\_alg=1 -CG:cflow=0  
-CG:push\_pop\_int\_saved\_regs=off -CG:cmp\_peep=on  
-HP:bdt=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-1012G-MTF,  
AMD Opteron 6164 HE

**SPECint2006 = 16.8**

**SPECint\_base2006 = 14.2**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Dec-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
-LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
-IPA:pu\_reorder=2 -IPA:min\_hotness=32 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -apo -LNO:pf2=0 -CG:gcm=off  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
-OPT:alias=disjoint -INLINE:aggressive=on -IPA:space=1000  
-IPA:plimit=20000 -mso

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
-WOPT:if\_conv=0 -m32 -HP:bdt=2m:heap=2m

473.astar: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server AS-1012G-MTF,  
AMD Opteron 6164 HE

**SPECint2006 = 16.8**

**SPECint\_base2006 = 14.2**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Dec-2010

**Hardware Availability:** Mar-2010

**Software Availability:** May-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 16:55:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 January 2011.