



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint®\_rate2006 = 1080**

IBM BladeCenter HX5 (Intel Xeon E7-4870)

**SPECint\_rate\_base2006 = 1000**

CPU2006 license: 11


Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

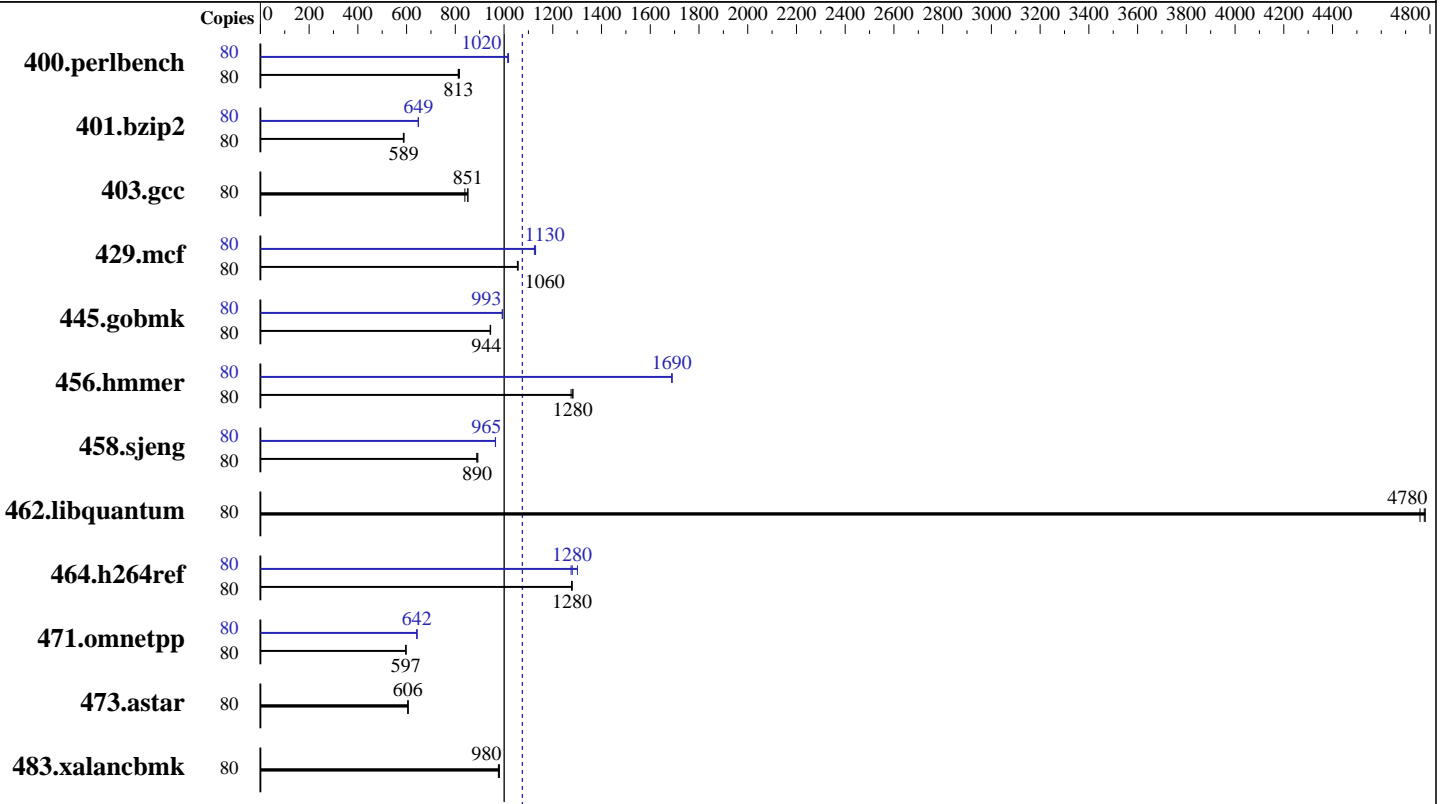

SPECint\_rate\_base2006 = 1000

**SPECint\_rate2006 = 1080**

### Hardware

CPU Name: Intel Xeon E7-4870  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 4Rx8 PC3-8500R-7, ECC)  
 Disk Subsystem: 4 x 50 GB SSD, RAID 0  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1080

IBM BladeCenter HX5 (Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 1000

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	963	812	<u>961</u>	<u>813</u>	957	817	80	768	1020	<u>769</u>	<u>1020</u>	770	1020
401.bzip2	80	1316	587	1311	589	<u>1311</u>	<u>589</u>	80	1192	648	<u>1190</u>	<u>649</u>	1190	649
403.gcc	80	756	852	<u>757</u>	<u>851</u>	767	839	80	756	852	<u>757</u>	<u>851</u>	767	839
429.mcf	80	690	1060	692	1050	<u>690</u>	<u>1060</u>	80	<u>647</u>	<u>1130</u>	649	1120	646	1130
445.gobmk	80	888	945	<u>889</u>	<u>944</u>	890	943	80	<u>845</u>	<u>993</u>	844	994	845	993
456.hammer	80	585	1280	<u>582</u>	<u>1280</u>	582	1280	80	442	1690	<u>442</u>	<u>1690</u>	442	1690
458.sjeng	80	<u>1088</u>	<u>890</u>	1085	892	1090	888	80	1003	965	<u>1003</u>	<u>965</u>	1004	965
462.libquantum	80	348	4760	347	4780	<u>347</u>	<u>4780</u>	80	348	4760	347	4780	<u>347</u>	<u>4780</u>
464.h264ref	80	<u>1384</u>	<u>1280</u>	1386	1280	1384	1280	80	1361	1300	<u>1383</u>	<u>1280</u>	1388	1280
471.omnetpp	80	837	598	<u>837</u>	<u>597</u>	838	597	80	779	642	778	643	<u>778</u>	<u>642</u>
473.astar	80	928	605	926	606	<u>927</u>	<u>606</u>	80	928	605	926	606	<u>927</u>	<u>606</u>
483.xalancbmk	80	565	977	563	980	<u>563</u>	<u>980</u>	80	565	977	563	980	<u>563</u>	<u>980</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
echo 1 > /proc/sys/vm/zone_reclaim_mode
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 52000 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Turbo Boost Power Optimization set to Traditional

## General Notes

Binaries were compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1080

IBM BladeCenter HX5 (Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 1000

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1080

IBM BladeCenter HX5 (Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 1000

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 1080

IBM BladeCenter HX5 (Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 1000

CPU2006 license: 11

Test date: Mar-2011

Test sponsor: IBM Corporation

Hardware Availability: May-2011

Tested by: IBM Corporation

Software Availability: Apr-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/smartheap -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 18:50:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 April 2011.