



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint_rate_base2006 = 121

CPU2006 license: 13


Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

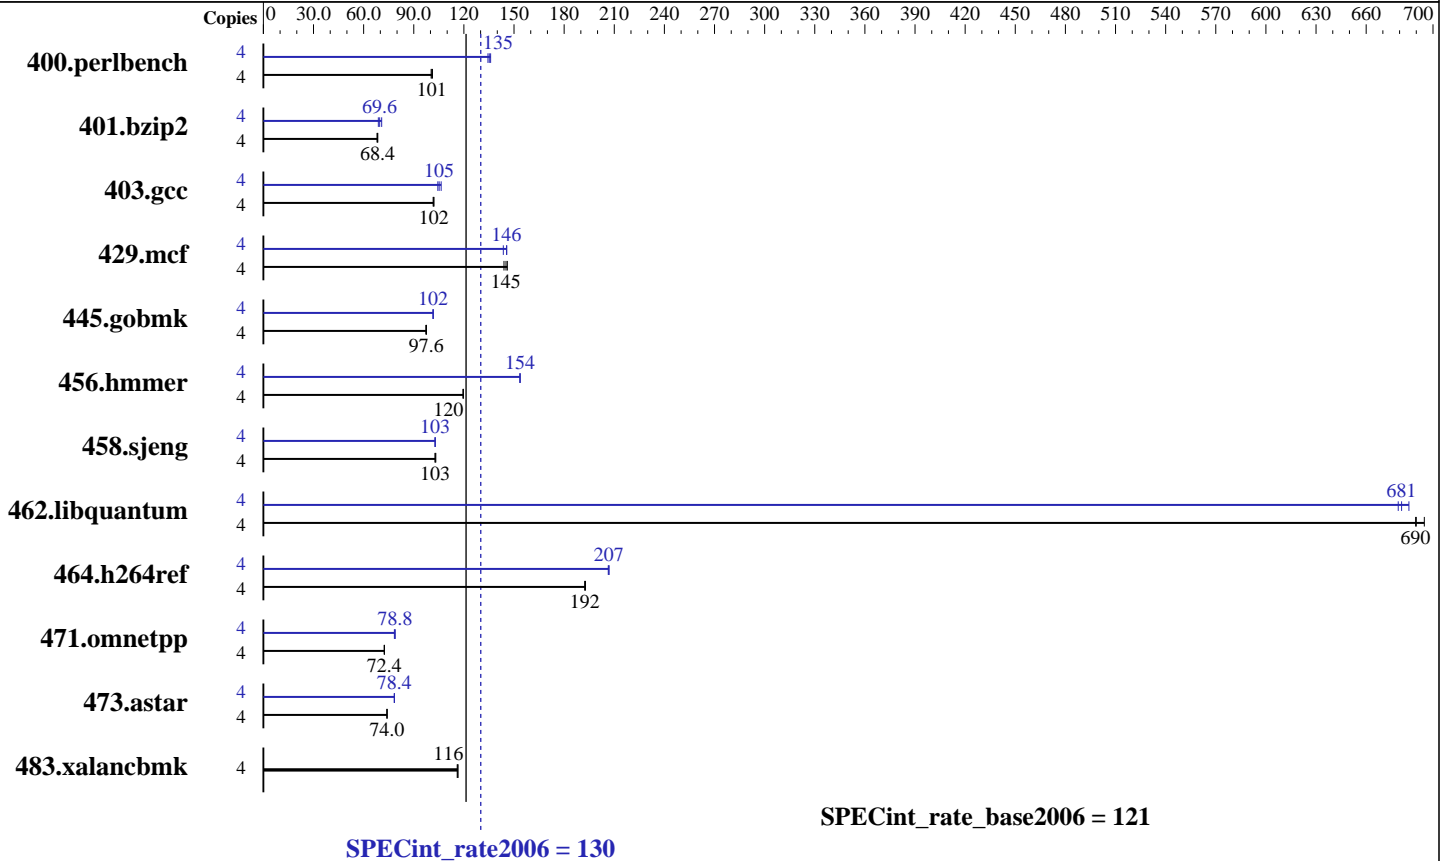

Hardware

CPU Name: Intel Core i5-2500
 CPU Characteristics: Intel Turbo Boost Technology up to 3.7 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.163 Build 20110217
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint_rate_base2006 = 121

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	388	101	387	101	389	100	4	291	134	288	136	289	135
401.bzip2	4	564	68.4	564	68.4	569	68.0	4	561	68.8	553	69.6	547	70.8
403.gcc	4	315	102	316	102	317	102	4	306	105	308	104	303	106
429.mcf	4	250	146	251	145	253	144	4	254	144	250	146	251	146
445.gobmk	4	431	97.2	431	97.6	431	97.6	4	413	102	413	102	412	102
456.hammer	4	312	120	312	120	312	120	4	243	154	243	154	243	154
458.sjeng	4	471	103	470	103	469	103	4	471	103	471	103	470	103
462.libquantum	4	120	690	119	695	120	690	4	122	681	121	686	122	679
464.h264ref	4	460	192	460	192	460	193	4	429	206	428	207	428	207
471.omnetpp	4	345	72.4	345	72.4	345	72.4	4	318	78.8	318	78.8	318	78.4
473.astar	4	379	74.0	379	74.0	379	74.0	4	358	78.4	359	78.4	359	78.4
483.xalancbmk	4	238	116	237	116	238	116	4	238	116	237	116	238	116

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

General Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint_rate_base2006 = 121

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc9 -Qstd=c99

456.hmmer: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

-Qstd=c99
-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks (except as noted below):

icl -Qvc9

473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

-link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint_rate_base2006 = 121

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Portability Flags

```

403.gcc: -DSPEC_CPU_WIN32
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
               -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch /F512000000
               shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
           -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias /F512000000

403.gcc: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
         -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxAVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
           -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1)
           -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
           /F512000000

458.sjeng: -Qauto-ilp32 -QxAVX(pass 2) -Qprof_gen(pass 1)
           -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
           /F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
               -Qopt-prefetch /F512000000

464.h264ref: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
            -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

```

C++ benchmarks:

```

471.omnetpp: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
            -O3 -Qprec-div- -Qansi-alias
            -Qopt-ra-region-strategy=block /F512000000 shlW32M.lib
            -link /FORCE:MULTIPLE

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 130

Intel DH67BLB3 Motherboard (Intel Core i5-2500)

SPECint_rate_base2006 = 121

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

```
473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
          -Qopt-prefetch /F512000000 shlw64M.lib
          -link /FORCE:MULTIPLE
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 19:01:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 April 2011.