



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 50.4

PowerEdge M610 (Intel Xeon E5645, 2.40 GHz)

SPECfp_base2006 = 47.8

CPU2006 license: 55


Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

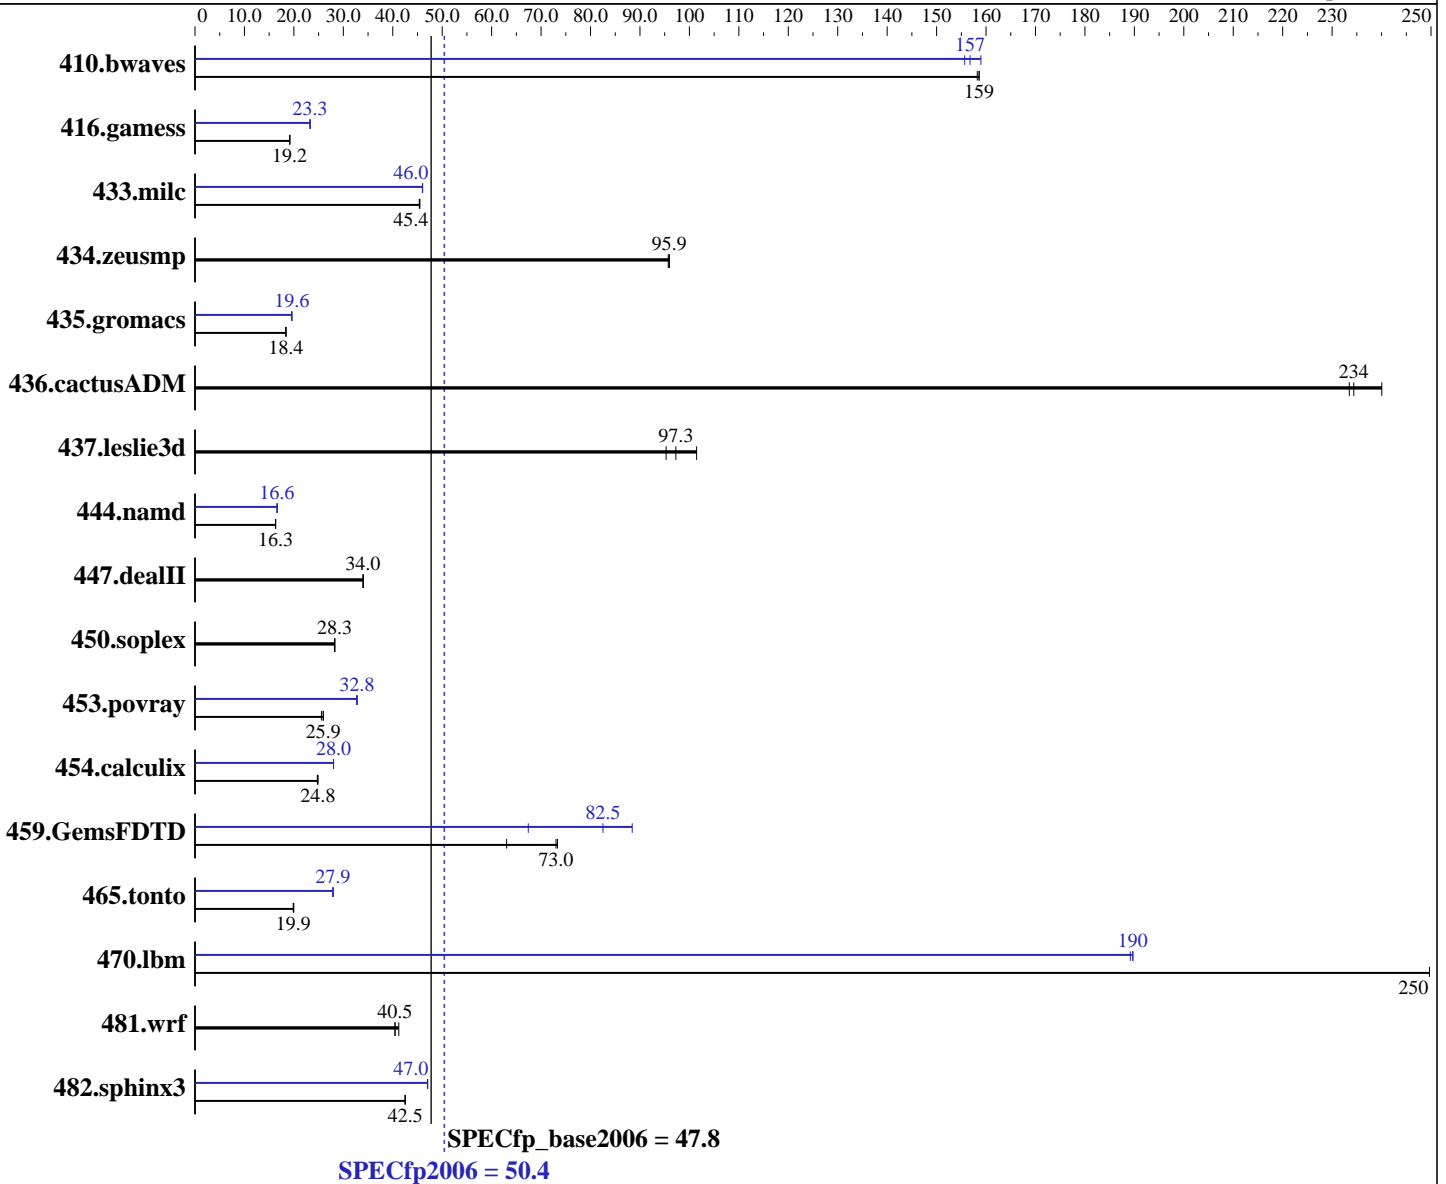

Hardware

CPU Name: Intel Xeon E5645
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0 Update 3
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 50.4

PowerEdge M610 (Intel Xeon E5645, 2.40 GHz)

SPECfp_base2006 = 47.8

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	85.7	159	85.7	159	85.9	158	85.5	159	86.7	157	87.3	156
416.gamess	1021	19.2	1021	19.2	1024	19.1	842	23.2	841	23.3	841	23.3
433.milc	202	45.5	202	45.4	202	45.4	199	46.0	199	46.0	200	46.0
434.zeusmp	95.1	95.7	94.9	95.9	94.9	95.9	95.1	95.7	94.9	95.9	94.9	95.9
435.gromacs	389	18.4	388	18.4	388	18.4	364	19.6	365	19.6	365	19.5
436.cactusADM	49.8	240	51.2	233	51.0	234	49.8	240	51.2	233	51.0	234
437.leslie3d	98.6	95.3	96.6	97.3	92.6	101	98.6	95.3	96.6	97.3	92.6	101
444.namd	492	16.3	491	16.3	492	16.3	483	16.6	483	16.6	483	16.6
447.dealII	336	34.0	336	34.0	336	34.0	336	34.0	336	34.0	336	34.0
450.soplex	295	28.3	296	28.2	295	28.3	295	28.3	296	28.2	295	28.3
453.povray	205	25.9	208	25.6	205	25.9	162	32.8	162	32.8	163	32.7
454.calculix	332	24.9	333	24.7	332	24.8	294	28.0	294	28.0	294	28.0
459.GemsFDTD	145	73.3	145	73.0	168	63.0	120	88.4	129	82.5	157	67.4
465.tonto	492	20.0	494	19.9	495	19.9	352	27.9	352	27.9	353	27.9
470.lbm	55.0	250	55.0	250	55.0	250	72.4	190	72.4	190	72.6	189
481.wrf	276	40.4	276	40.5	271	41.2	276	40.4	276	40.5	271	41.2
482.sphinx3	458	42.6	458	42.5	459	42.5	415	47.0	414	47.1	414	47.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
 echo 900 > /proc/sys/vm/nr_hugepages
 export HUGETLB_MORECORE=yes
 export LD_PRELOAD=/usr/lib64/libhugetlbfs.so

Platform Notes

BIOS Settings:
 Power Management = Maximum Performance (Default = Active Power Controller)
 Data Reuse = Disabled (Default = Enabled)
 Logical Processor = Disabled (Default = Enabled)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 50.4

PowerEdge M610 (Intel Xeon E5645, 2.40 GHz)

SPECfp_base2006 = 47.8

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

General Notes

OMP_NUM_THREADS set to number of cores
Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 50.4

PowerEdge M610 (Intel Xeon E5645, 2.40 GHz)

SPECfp_base2006 = 47.8

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -parallel
-ansi-alias -static -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 50.4

PowerEdge M610 (Intel Xeon E5645, 2.40 GHz)

SPECfp_base2006 = 47.8

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 50.4

PowerEdge M610 (Intel Xeon E5645, 2.40 GHz)

SPECfp_base2006 = 47.8

CPU2006 license: 55

Test date: May-2011

Test sponsor: Dell Inc.

Hardware Availability: Feb-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:25:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.