



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint®_rate2006 = 407

Servidor Itautec MP224 (Intel Xeon X5680)

SPECint_rate_base2006 = 382

CPU2006 license: 9001


Test date: Jul-2011

Test sponsor: Itautec

Hardware Availability: Feb-2011

Tested by: Itautec

Software Availability: Jan-2011

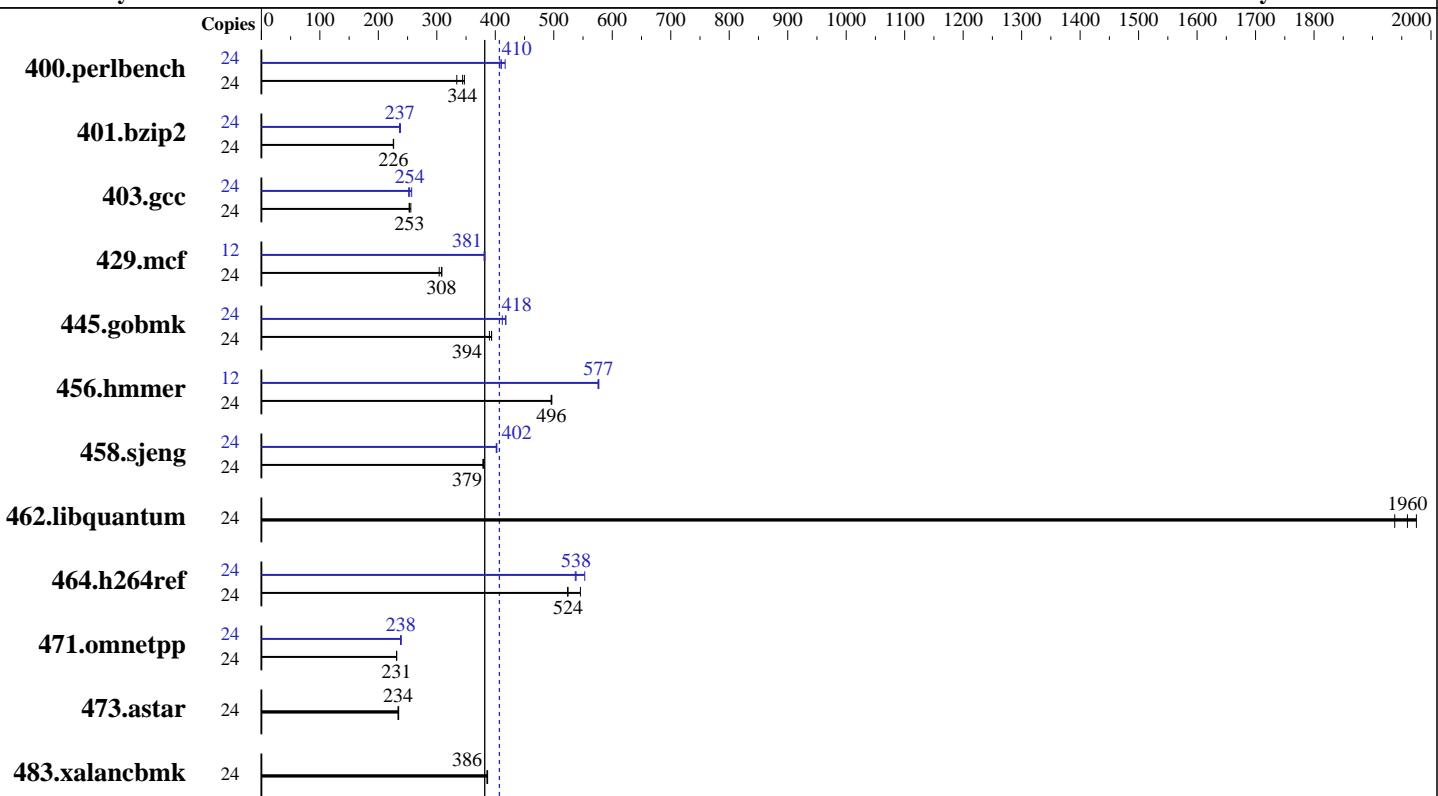

Hardware		Software	
CPU Name:	Intel Xeon X5680	Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz	Compiler:	Intel C++ Compiler XE for applications running on IA-32 Version 12.0.2 Build 20110112
CPU MHz:	3333	Auto Parallel:	No
FPU:	Integrated	File System:	ext3
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chips	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V8.1
L3 Cache:	12 MB I+D on chip per chip		
Other Cache:	None		
Memory:	48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)		
Disk Subsystem:	1 x 500 GB SATA-2, 7200 RPM		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautech

SPECint_rate2006 = 407

Servidor Itautech MP224 (Intel Xeon X5680)

SPECint_rate_base2006 = 382

CPU2006 license: 9001

Test date: Jul-2011

Test sponsor: Itautech

Hardware Availability: Feb-2011

Tested by: Itautech

Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	702	334	681	344	675	347	24	571	410	575	408	562	417
401.bzip2	24	1026	226	1026	226	1024	226	24	979	237	980	236	974	238
403.gcc	24	756	256	763	253	764	253	24	752	257	762	254	767	252
429.mcf	24	720	304	711	308	709	309	12	286	382	287	381	287	381
445.gobmk	24	640	394	639	394	646	390	24	602	418	603	418	611	412
456.hammer	24	451	497	451	496	452	496	12	194	577	194	576	194	577
458.sjeng	24	766	379	766	379	765	380	24	721	403	722	402	723	402
462.libquantum	24	252	1980	257	1940	254	1960	24	252	1980	257	1940	254	1960
464.h264ref	24	974	546	1015	524	1013	524	24	961	553	989	537	987	538
471.omnetpp	24	648	231	649	231	649	231	24	630	238	630	238	627	239
473.astar	24	718	235	720	234	720	234	24	718	235	720	234	720	234
483.xalancbmk	24	429	386	429	386	428	387	24	429	386	429	386	428	387

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Data Reuse disabled in BIOS.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MP224 (Intel Xeon X5680)

SPECint_rate2006 = 407

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Jul-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/rkaneca/sh/SmartHeap_8.1/lib -lsmartheap  
-B /usr/share/libhugetlbfsl -Wl,-hugetlbfsl-link=BDT
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint_rate2006 = 407

Servidor Itaute MP224 (Intel Xeon X5680)

SPECint_rate_base2006 = 382

CPU2006 license: 9001

Test date: Jul-2011

Test sponsor: Itaute

Hardware Availability: Feb-2011

Tested by: Itaute

Software Availability: Jan-2011

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaaneca/sh/SmartHeap_8.1/lib -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECint_rate2006 = 407

Servidor Itaute MP224 (Intel Xeon X5680)

SPECint_rate_base2006 = 382

CPU2006 license: 9001

Test date: Jul-2011

Test sponsor: Itaute

Hardware Availability: Feb-2011

Tested by: Itaute

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaute-Intel-Linux64-Platform.html>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Itaute-Intel-Linux64-Platform.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:51:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 August 2011.