



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECint®\_rate2006 = 280**

NovaScale T840 F2 (Intel Xeon X5560, 2.80 GHz)

**SPECint\_rate\_base2006 = 259**

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jul-2011

Hardware Availability: Mar-2009

Software Availability: Jan-2011

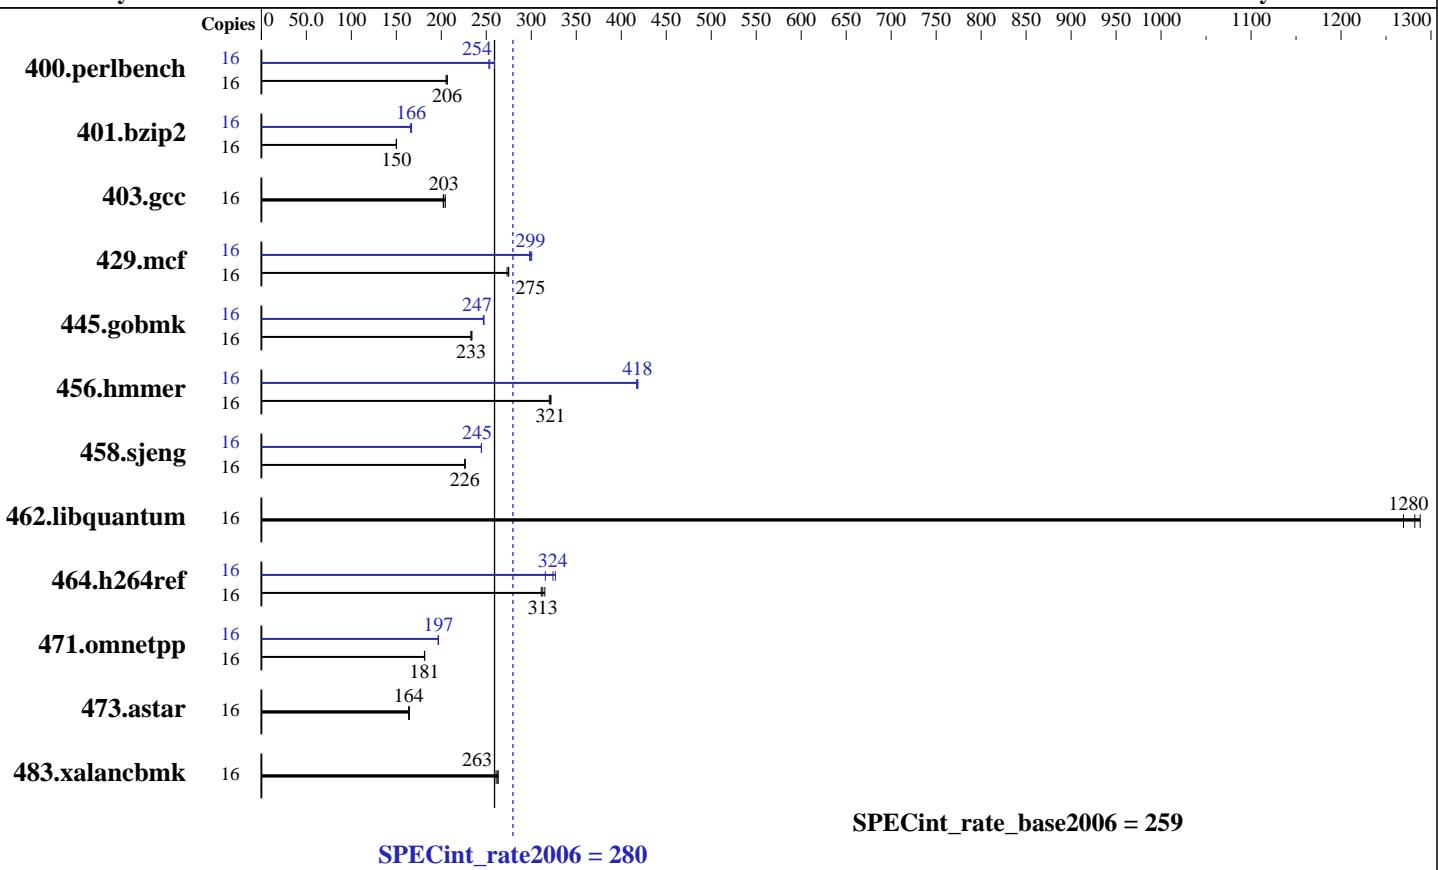

## Hardware

CPU Name: Intel Xeon X5560  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECint\_rate2006 = 280**

NovaScale T840 F2 (Intel Xeon X5560, 2.80 GHz)

**SPECint\_rate\_base2006 = 259**

CPU2006 license: 20

Test date: Jul-2011

Test sponsor: Bull SAS

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	756	207	762	205	<b>758</b>	<b>206</b>	16	603	259	618	253	<b>616</b>	<b>254</b>
401.bzip2	16	<b>1029</b>	<b>150</b>	1028	150	1030	150	16	<b>928</b>	<b>166</b>	930	166	925	167
403.gcc	16	630	204	<b>635</b>	<b>203</b>	637	202	16	630	204	<b>635</b>	<b>203</b>	637	202
429.mcf	16	531	275	534	273	<b>531</b>	<b>275</b>	16	489	298	<b>488</b>	<b>299</b>	486	300
445.gobmk	16	717	234	720	233	<b>720</b>	<b>233</b>	16	<b>679</b>	<b>247</b>	680	247	679	247
456.hammer	16	464	322	467	320	<b>465</b>	<b>321</b>	16	358	417	357	418	<b>357</b>	<b>418</b>
458.sjeng	16	856	226	855	226	<b>856</b>	<b>226</b>	16	792	244	791	245	<b>791</b>	<b>245</b>
462.libquantum	16	257	1290	<b>259</b>	<b>1280</b>	261	1270	16	257	1290	<b>259</b>	<b>1280</b>	261	1270
464.h264ref	16	1124	315	<b>1132</b>	<b>313</b>	1138	311	16	1084	327	<b>1093</b>	<b>324</b>	1122	316
471.omnetpp	16	551	182	552	181	<b>551</b>	<b>181</b>	16	<b>508</b>	<b>197</b>	509	196	508	197
473.astar	16	684	164	<b>685</b>	<b>164</b>	686	164	16	684	164	<b>685</b>	<b>164</b>	686	164
483.xalancbmk	16	<b>420</b>	<b>263</b>	423	261	420	263	16	<b>420</b>	<b>263</b>	423	261	420	263

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

```
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 7200 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

## General Notes

The Dell PowerEdge T610 and  
the Bull NovaScale T840 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge T610 model  
Binaries were compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T840 F2 (Intel Xeon X5560, 2.80 GHz)

**SPECint\_rate2006 = 280**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jul-2011

Hardware Availability: Mar-2009

Software Availability: Jan-2011

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbf/ -Wl,-hugetlbf-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbf/ -Wl,-hugetlbf-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmr: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T840 F2 (Intel Xeon X5560, 2.80 GHz)

**SPECint\_rate2006 = 280**

**SPECint\_rate\_base2006 = 259**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jul-2011

Hardware Availability: Mar-2009

Software Availability: Jan-2011

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -auto-ilp32 -ansi-alias
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
               -ansi-alias -auto-ilp32

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll14 -auto-ilp32
               -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -unroll12 -ansi-alias
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T840 F2 (Intel Xeon X5560, 2.80 GHz)

**SPECint\_rate2006 = 280**

**SPECint\_rate\_base2006 = 259**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jul-2011

**Hardware Availability:** Mar-2009

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/smartheap -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 23:26:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 August 2011.