



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®\_rate2006 = 295

ProLiant DL385 G7  
(2.40 GHz AMD Opteron 6136)

SPECint\_rate\_base2006 = 253

CPU2006 license: 3


Test date: Jul-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2010

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

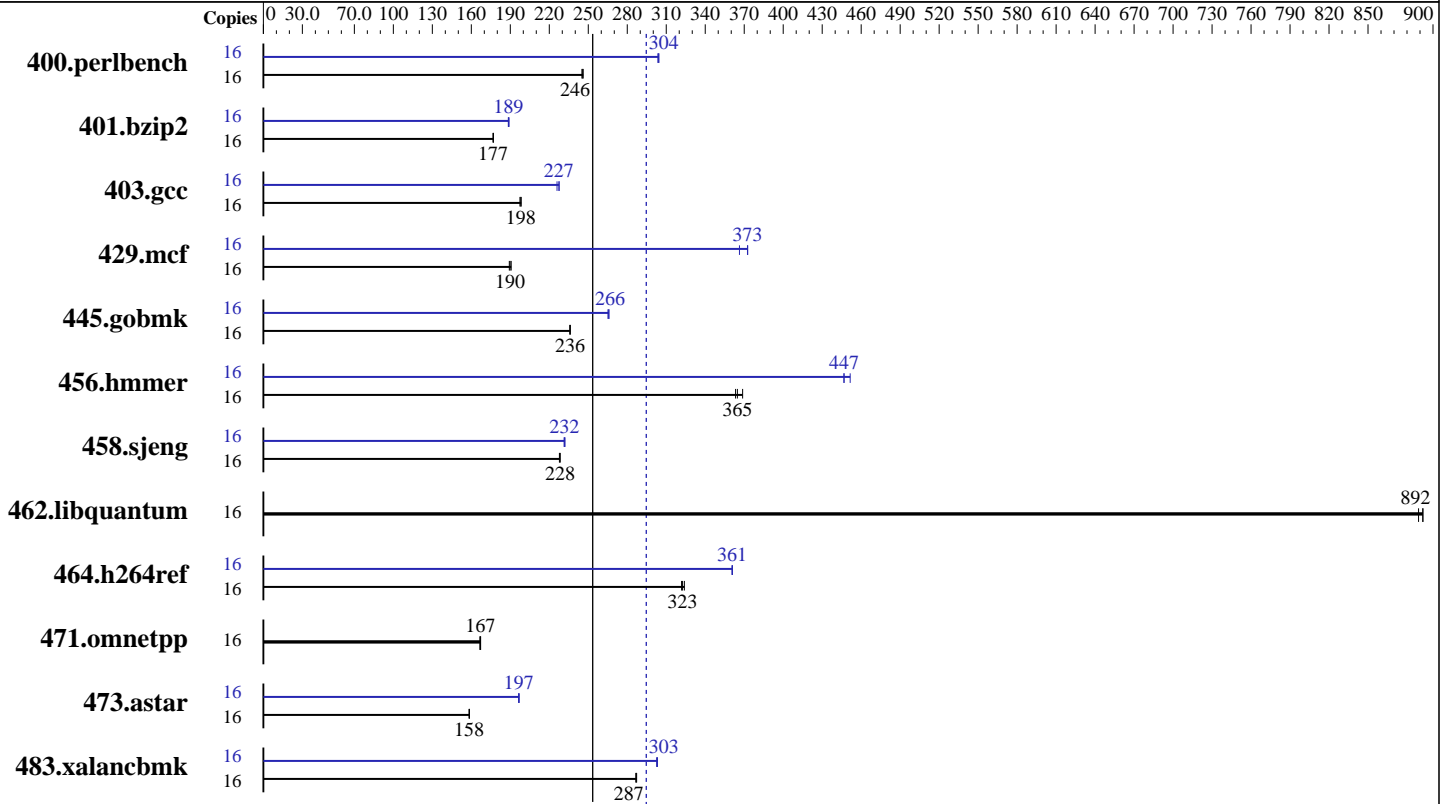

SPECint\_rate2006 = 295

SPECint\_rate\_base2006 = 253

### Hardware

CPU Name: AMD Opteron 6136  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 146 GB 15 K SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 295

ProLiant DL385 G7  
(2.40 GHz AMD Opteron 6136)

SPECint\_rate\_base2006 = 253

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Jul-2011  
Hardware Availability: Apr-2010  
Software Availability: Aug-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b>636</b>	<b>246</b>	635	246	638	245	16	514	304	515	304	<b>514</b>	<b>304</b>
401.bzip2	16	<b>873</b>	<b>177</b>	873	177	873	177	16	819	189	<b>819</b>	<b>189</b>	817	189
403.gcc	16	649	198	652	197	<b>650</b>	<b>198</b>	16	570	226	<b>566</b>	<b>227</b>	566	228
429.mcf	16	<b>769</b>	<b>190</b>	771	189	765	191	16	392	373	398	366	<b>392</b>	<b>373</b>
445.gobmk	16	711	236	<b>711</b>	<b>236</b>	712	236	16	633	265	631	266	<b>632</b>	<b>266</b>
456.hammer	16	405	369	<b>409</b>	<b>365</b>	411	363	16	<b>334</b>	<b>447</b>	331	452	334	447
458.sjeng	16	848	228	850	228	<b>848</b>	<b>228</b>	16	<b>836</b>	<b>232</b>	837	231	834	232
462.libquantum	16	<b>372</b>	<b>892</b>	373	889	372	892	16	<b>372</b>	<b>892</b>	373	889	372	892
464.h264ref	16	<b>1098</b>	<b>323</b>	1100	322	1093	324	16	981	361	<b>981</b>	<b>361</b>	982	361
471.omnetpp	16	600	167	<b>599</b>	<b>167</b>	598	167	16	600	167	<b>599</b>	<b>167</b>	598	167
473.astar	16	708	159	709	158	<b>709</b>	<b>158</b>	16	571	197	<b>571</b>	<b>197</b>	572	196
483.xalancbmk	16	<b>385</b>	<b>287</b>	384	287	385	287	16	<b>364</b>	<b>303</b>	364	303	365	303

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=10800 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/cpu2006/amd1002mc-rate-libs-revC/64:/cpu2006/amd1002mc-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
openc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 295**

ProLiant DL385 G7  
(2.40 GHz AMD Opteron 6136)

**SPECint\_rate\_base2006 = 253**

**CPU2006 license:** 3

**Test date:** Jul-2011

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2010

**Tested by:** Hewlett-Packard Company

**Software Availability:** Aug-2010

## Base Compiler Invocation (Continued)

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -mso -Ofast -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m

C++ benchmarks:  
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on  
-CG:cmp\_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 295

ProLiant DL385 G7  
(2.40 GHz AMD Opteron 6136)

SPECint\_rate\_base2006 = 253

CPU2006 license: 3

Test date: Jul-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2010

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
-CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:alias=disjoint  
-OPT:goto=off -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
-LNO:prefetch\_ahead=10 -CG:cmp\_peep=on -m32  
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on  
-CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -OPT:keep\_ext=on -ipa -IPA:plimit=750  
-IPA:min\_hotness=300 -IPA:pu\_reorder=1 -LNO:prefetch=1  
-LNO:ignore\_feedback=off -CG:p2align=on  
-CG:unroll\_fb\_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=0  
-OPT:alias=disjoint -OPT:unroll\_times\_max=8  
-OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
-CG:local\_sched\_alg=1 -CG:cflow=0  
-CG:push\_pop\_int\_saved\_regs=off -CG:cmp\_peep=on  
-HP:bdt=2m:heap=2m

458.sjeng: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
-LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
-IPA:pu\_reorder=2 -CG:ptr\_load\_use=0

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 295**

ProLiant DL385 G7  
(2.40 GHz AMD Opteron 6136)

**SPECint\_rate\_base2006 = 253**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Jul-2011  
**Hardware Availability:** Apr-2010  
**Software Availability:** Aug-2010

## Peak Optimization Flags (Continued)

458.sjeng (continued):  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: basepeak = yes

464.h264ref: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>  
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>  
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 23:23:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 August 2011.