



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]_rate2006 = 530

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECfp_rate_base2006 = 520

CPU2006 license: 9006


Test date: Nov-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

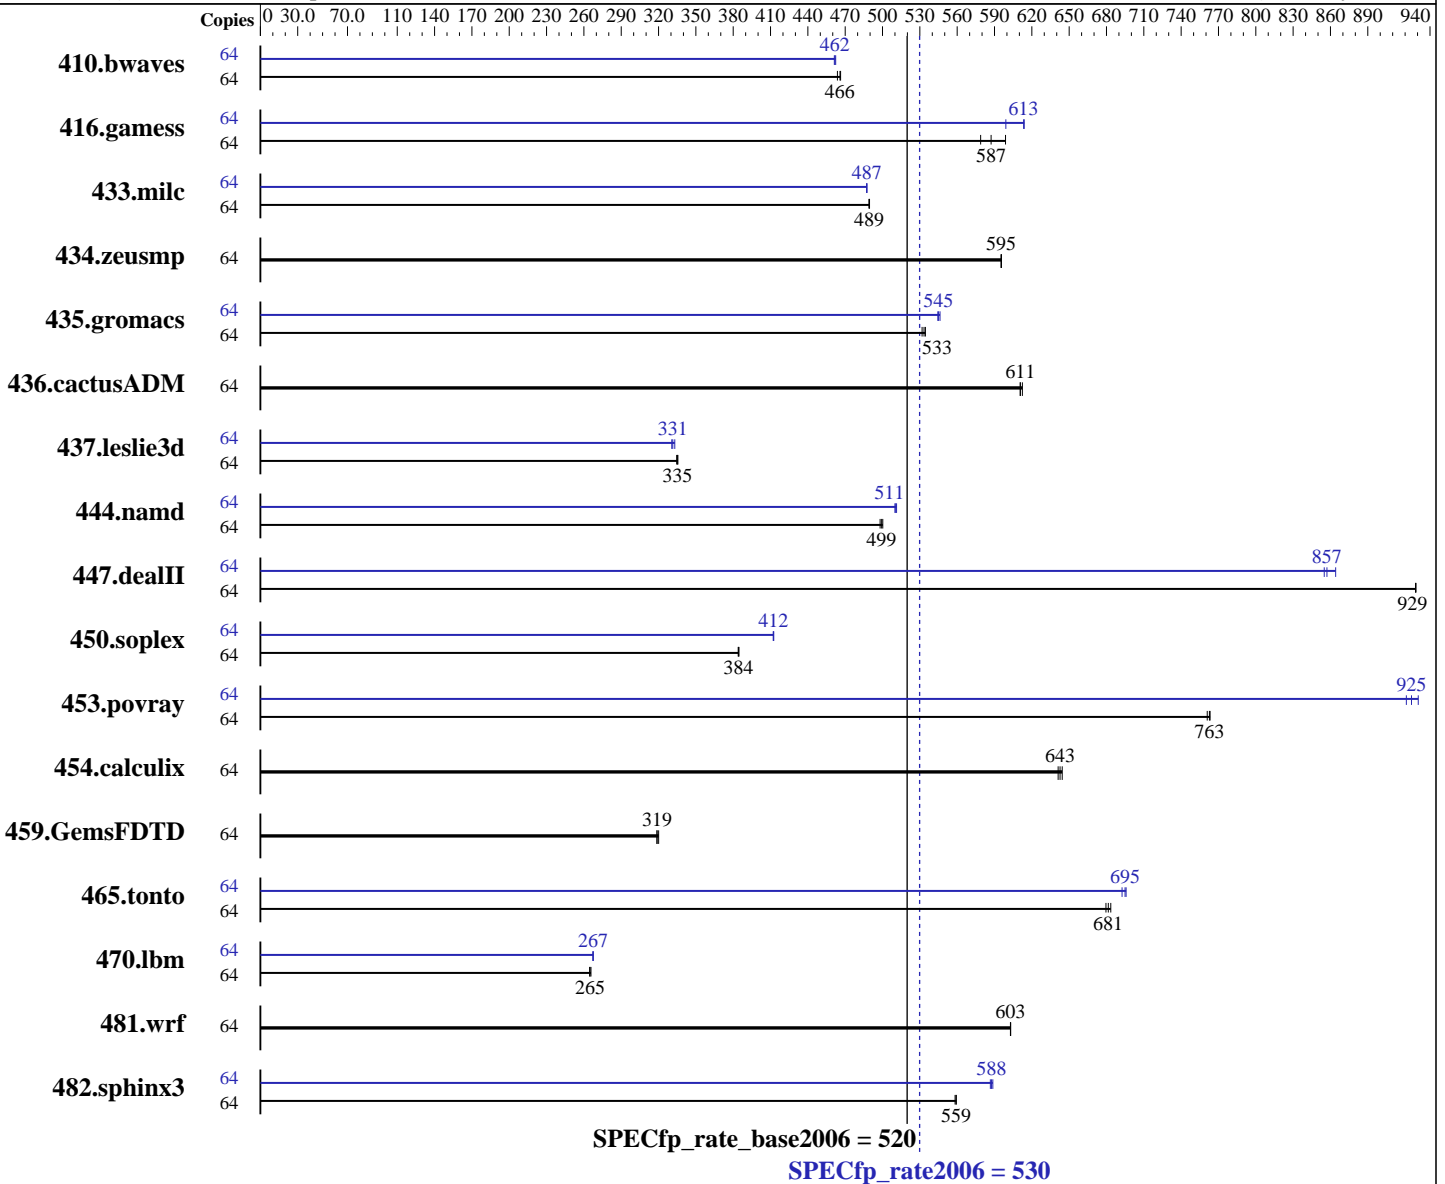

Hardware

CPU Name: Intel Xeon E7-8830
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64 on an x86_64
 Compiler: C/C++/Fortran: Version 12.0.4.191 of Intel Compiler XE Build 20110427
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = **530**

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECfp_rate_base2006 = **520**

CPU2006 license: 9006

Test date: Nov-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (64 x 8 GB 2Rx4 PC3-8500R-7, ECC)
 Disk Subsystem: 2x300 GB SAS, 10000 RPM, RAID 0
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1867	466	1875	464	1865	466	64	1884	462	1886	461	1881	462
416.gamess	64	2165	579	2134	587	2093	599	64	2041	614	2092	599	2043	613
433.milc	64	1200	490	1201	489	1201	489	64	1206	487	1205	487	1206	487
434.zeusmp	64	978	596	978	595	978	595	64	978	596	978	595	978	595
435.gromacs	64	855	534	857	533	859	532	64	837	546	838	545	839	544
436.cactusADM	64	1252	611	1252	611	1249	612	64	1252	611	1252	611	1249	612
437.leslie3d	64	1798	335	1794	335	1793	335	64	1806	333	1820	331	1815	331
444.namd	64	1031	498	1026	500	1028	499	64	1007	510	1004	511	1005	511
447.dealII	64	788	929	788	929	789	928	64	856	855	847	864	854	857
450.soplex	64	1389	384	1388	385	1390	384	64	1295	412	1294	413	1295	412
453.povray	64	446	763	447	761	446	763	64	368	925	366	931	370	921
454.calculix	64	822	643	819	644	824	641	64	822	643	819	644	824	641
459.GemsFDTD	64	2131	319	2130	319	2121	320	64	2131	319	2130	319	2121	320
465.tonto	64	924	681	921	683	927	680	64	909	693	905	696	906	695
470.lbm	64	3323	265	3310	266	3319	265	64	3290	267	3288	267	3288	267
481.wrf	64	1186	603	1186	603	1186	603	64	1186	603	1186	603	1186	603
482.sphinx3	64	2230	559	2234	558	2231	559	64	2119	589	2126	587	2123	588

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
echo 1 > /proc/sys/vm/zone_reclaim_mode
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 36000 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 530

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECfp_rate_base2006 = 520

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Nov-2011

Hardware Availability: Nov-2011

Software Availability: May-2011

Platform Notes

Patrol Scrubbing set to disabled in Maintenance Console

General Notes

The Express5800/A1080a-S and the Express5800/A1080a-D models are electronically equivalent. The results have been measured on the Express5800/A1080a-S model. Binaries were compiled on RHEL 5.6

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 530

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECfp_rate_base2006 = 520

CPU2006 license: 9006

Test date: Nov-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
 416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
 436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
 459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 530

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECfp_rate_base2006 = 520

CPU2006 license: 9006

Test date: Nov-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 530

Express5800/A1080a-D (Intel Xeon E7-8830)

SPECfp_rate_base2006 = 520

CPU2006 license: 9006

Test date: Nov-2011

Test sponsor: NEC Corporation

Hardware Availability: Nov-2011

Tested by: NEC Corporation

Software Availability: May-2011

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110705.html>
<http://www.spec.org/cpu2006/flags/NEC-platform-linux64-revC.20111206.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110705.xml>
<http://www.spec.org/cpu2006/flags/NEC-platform-linux64-revC.20111206.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 03:18:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 January 2012.