



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6272

SPECint<sup>®</sup>\_rate2006 = 891

SPECint\_rate\_base2006 = 779

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

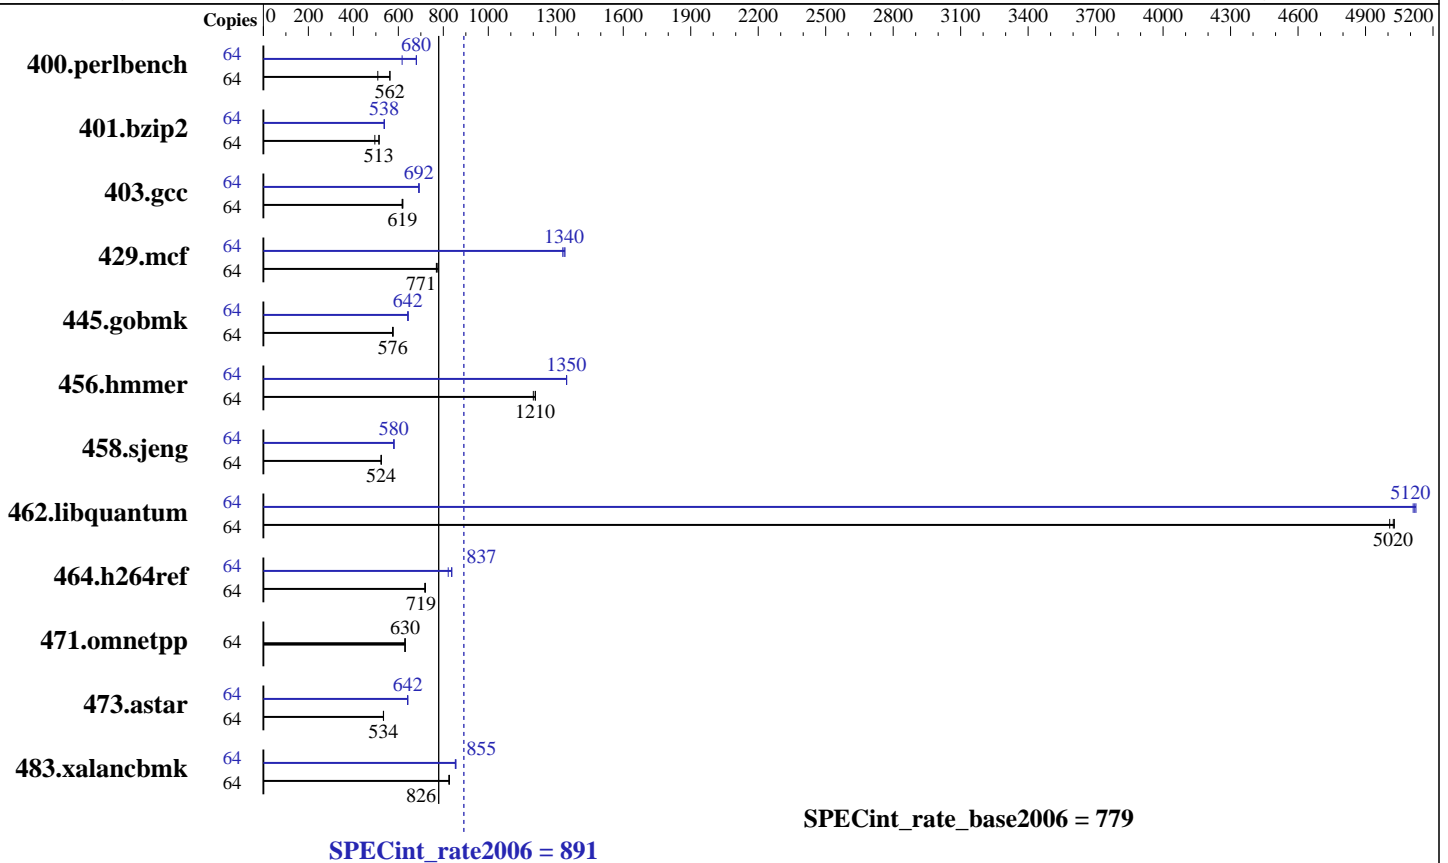

### Hardware

CPU Name: AMD Opteron 6272  
 CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 512 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1,  
 Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler  
 Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6272

SPECint\_rate2006 = 891

SPECint\_rate\_base2006 = 779

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1229	509	<b>1113</b>	<b>562</b>	1110	563	64	1014	617	<b>920</b>	<b>680</b>	919	680
401.bzip2	64	1246	496	1199	515	<b>1204</b>	<b>513</b>	64	1149	538	1149	537	<b>1149</b>	<b>538</b>
403.gcc	64	<b>833</b>	<b>619</b>	835	617	831	620	64	<b>745</b>	<b>692</b>	744	692	746	691
429.mcf	64	752	776	759	769	<b>757</b>	<b>771</b>	64	435	1340	<b>437</b>	<b>1340</b>	439	1330
445.gobmk	64	1164	577	1169	574	<b>1165</b>	<b>576</b>	64	<b>1045</b>	<b>642</b>	1043	644	1045	642
456.hammer	64	498	1200	494	1210	<b>494</b>	<b>1210</b>	64	443	1350	443	1350	<b>443</b>	<b>1350</b>
458.sjeng	64	<b>1478</b>	<b>524</b>	1479	524	1477	524	64	1334	581	<b>1334</b>	<b>580</b>	1335	580
462.libquantum	64	264	5030	265	5010	<b>264</b>	<b>5020</b>	64	259	5120	259	5110	<b>259</b>	<b>5120</b>
464.h264ref	64	<b>1970</b>	<b>719</b>	1966	721	1973	718	64	1723	822	<b>1692</b>	<b>837</b>	1691	838
471.omnetpp	64	<b>635</b>	<b>630</b>	634	631	635	629	64	<b>635</b>	<b>630</b>	634	631	635	629
473.astar	64	842	534	<b>841</b>	<b>534</b>	841	534	64	700	642	<b>700</b>	<b>642</b>	701	641
483.xalancbmk	64	534	827	<b>535</b>	<b>826</b>	535	825	64	<b>516</b>	<b>855</b>	516	856	518	853

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf

Set vm/nr\_hugepages=57344 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/root/work/cpu2006v1.2/amd1104-rate-libs-revB/32:/root/work/cpu2006v1.2/amd1104-rate-libs-revB/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6272

SPECint\_rate2006 = 891

SPECint\_rate\_base2006 = 779

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=on  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6272

SPECint\_rate2006 = 891

SPECint\_rate\_base2006 = 779

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
 -IPA:plimit=20000 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
 -CG:unroll\_fb\_req=on -CG:movext\_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
 -OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
 -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
 -INLINE:aggressive=on -CG:gcm=off  
 -GRA:prioritize\_by\_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1  
 -LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=16  
 -OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
 -HP:bd=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6272

SPECint\_rate2006 = 891

SPECint\_rate\_base2006 = 779

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:bd=2m:heap=2m  
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=16 -LNO:prefetch=2  
-LNO:prefetch\_ahead=4 -LNO:pf2=0 -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-GRA:optimize\_boundary=on -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:small\_pu=3000 -IPA:plimit=3000  
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2042G-6RF,  
AMD Opteron 6272

SPECint\_rate2006 = 891

SPECint\_rate\_base2006 = 779

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Dec-2011

**Hardware Availability:** Nov-2011

**Software Availability:** Jul-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 03:17:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 January 2012.