



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint®_rate2006 = 430

Servidor Itaotec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 407

CPU2006 license: 9001


Test date: Jan-2012

Test sponsor: Itaotec

Hardware Availability: Jul-2011

Tested by: Itaotec

Software Availability: Oct-2011

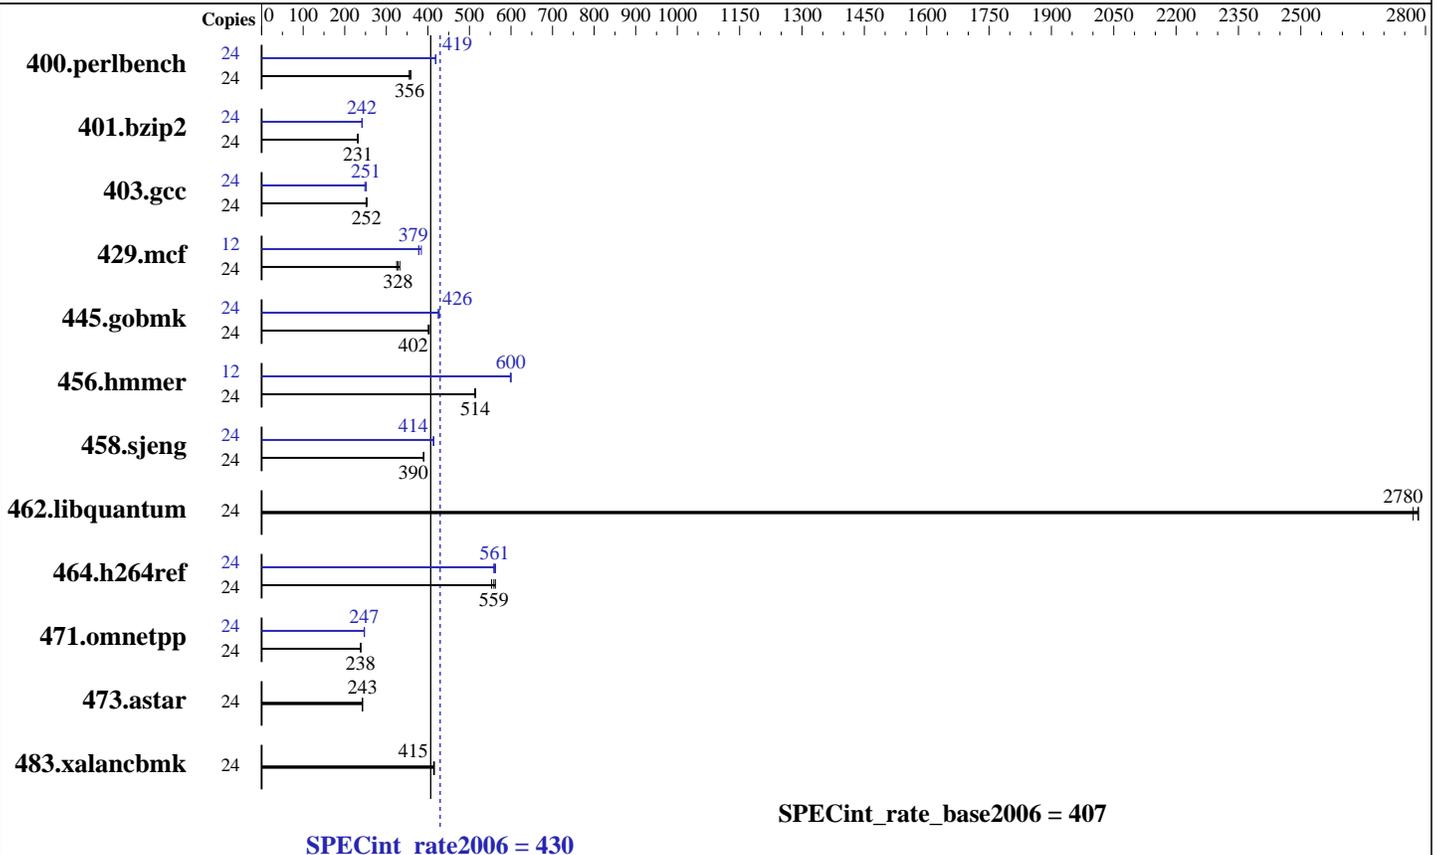

Hardware

CPU Name: Intel Xeon X5690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz
 CPU MHz: 3467
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 2 x 500 GB SATA, 7200 RPM, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), 2.6.32.12-0.7-default
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20111011
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 430

Servidor Itaotec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 407

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2012
Hardware Availability: Jul-2011
Software Availability: Oct-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	659	356	660	355	653	359	24	561	418	559	419	560	419
401.bzip2	24	1004	231	997	232	1001	231	24	958	242	957	242	960	241
403.gcc	24	769	251	762	254	765	252	24	771	251	767	252	778	248
429.mcf	24	658	333	667	328	673	325	12	285	384	290	378	289	379
445.gobmk	24	626	402	624	403	628	401	24	589	427	592	426	592	425
456.hammer	24	435	514	437	513	436	514	12	187	598	187	600	187	600
458.sjeng	24	745	390	744	390	746	390	24	702	414	702	414	703	413
462.libquantum	24	180	2770	179	2780	179	2780	24	180	2770	179	2780	179	2780
464.h264ref	24	950	559	944	562	960	553	24	944	563	951	559	947	561
471.omnetpp	24	629	239	629	238	630	238	24	607	247	607	247	608	247
473.astar	24	694	243	696	242	694	243	24	694	243	696	242	694	243
483.xalancbmk	24	399	415	400	414	399	415	24	399	415	400	414	399	415

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run

Platform Notes

Data Reuse disabled in BIOS.
DCU Prefetcher disabled in BIOS.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECint_rate2006 = 430

Servidor Itaotec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 407

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Jan-2012
Hardware Availability: Jul-2011
Software Availability: Oct-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 430

Servidor Itautec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 407

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jan-2012
Hardware Availability: Jul-2011
Software Availability: Oct-2011

Peak Portability Flags (Continued)

456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/rcaneca/sh/SmartHeap_8.1/lib -lsmarheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint_rate2006 = 430

Servidor Itautec MX214 (Intel Xeon X5690)

SPECint_rate_base2006 = 407

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Jan-2012
Hardware Availability: Jul-2011
Software Availability: Oct-2011

Peak Optimization Flags (Continued)

473.astar: basepeak = yes
483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:38:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 February 2012.