



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6220

SPECfp®2006 = 45.3

SPECfp_base2006 = 38.1

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

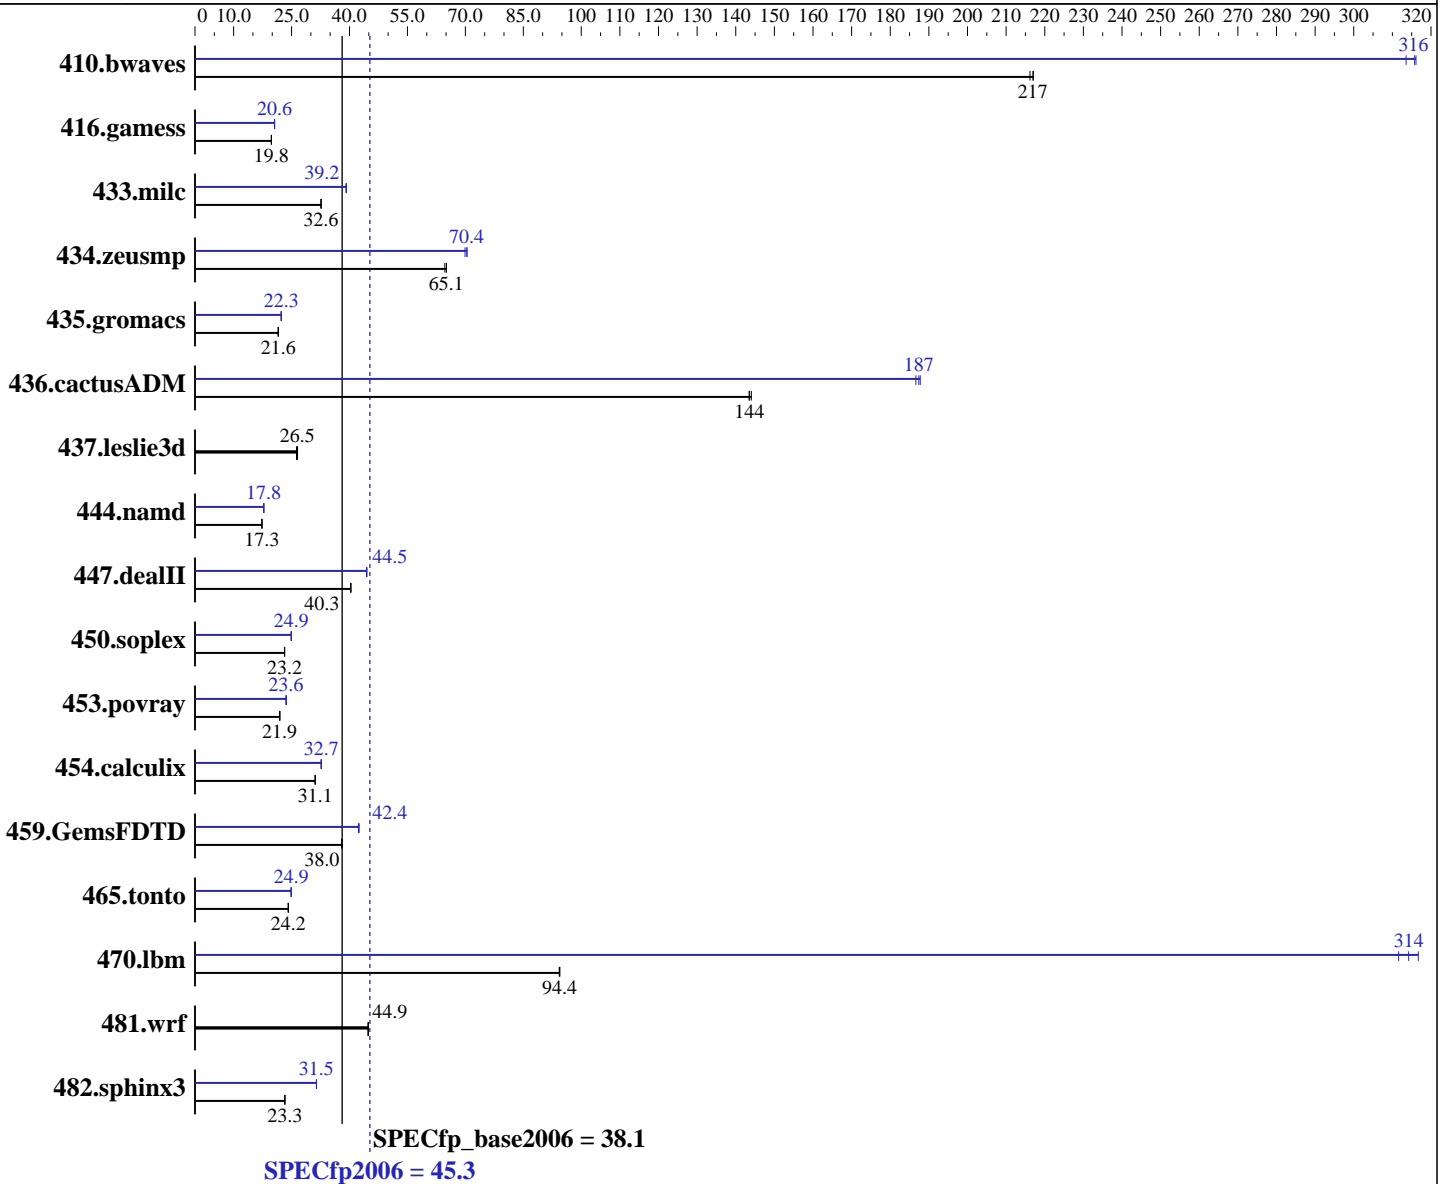

Hardware

CPU Name: AMD Opteron 6220
 CPU Characteristics: AMD Turbo CORE technology up to 3.60 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.1,
Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64
Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6220

SPECfp2006 = **45.3**

SPECfp_base2006 = **38.1**

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Primary Cache: 256 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 4 cores

Other Cache: None

Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 500 GB SATA, 7200 RPM

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>62.6</u>	<u>217</u>	62.6	217	62.9	216	<u>43.0</u>	<u>316</u>	43.0	316	43.3	314
416.gamess	<u>990</u>	<u>19.8</u>	990	19.8	990	19.8	<u>950</u>	<u>20.6</u>	951	20.6	950	20.6
433.milc	281	32.7	281	32.6	<u>281</u>	<u>32.6</u>	234	39.2	235	39.1	<u>234</u>	<u>39.2</u>
434.zeusmp	140	65.1	<u>140</u>	<u>65.1</u>	141	64.7	130	69.9	<u>129</u>	<u>70.4</u>	129	70.4
435.gromacs	331	21.6	<u>331</u>	<u>21.6</u>	331	21.6	<u>320</u>	<u>22.3</u>	320	22.3	320	22.3
436.cactusADM	83.0	144	83.3	143	<u>83.2</u>	<u>144</u>	<u>63.8</u>	<u>187</u>	63.6	188	64.0	187
437.leslie3d	354	26.5	<u>355</u>	<u>26.5</u>	358	26.3	354	26.5	<u>355</u>	<u>26.5</u>	358	26.3
444.namd	463	17.3	463	17.3	<u>463</u>	<u>17.3</u>	450	17.8	<u>450</u>	<u>17.8</u>	450	17.8
447.dealII	284	40.3	284	40.3	<u>284</u>	<u>40.3</u>	257	44.5	<u>257</u>	<u>44.5</u>	257	44.4
450.soplex	359	23.2	360	23.2	<u>360</u>	<u>23.2</u>	334	24.9	<u>335</u>	<u>24.9</u>	335	24.9
453.povray	242	21.9	<u>242</u>	<u>21.9</u>	242	21.9	<u>225</u>	<u>23.6</u>	225	23.6	225	23.6
454.calculix	265	31.1	<u>265</u>	<u>31.1</u>	265	31.1	253	32.7	252	32.7	<u>252</u>	<u>32.7</u>
459.GemsFDTD	280	37.9	<u>279</u>	<u>38.0</u>	279	38.1	<u>250</u>	<u>42.4</u>	250	42.5	251	42.3
465.tonto	<u>407</u>	<u>24.2</u>	407	24.2	407	24.2	395	24.9	395	24.9	<u>395</u>	<u>24.9</u>
470.lbm	145	94.4	146	94.3	<u>146</u>	<u>94.4</u>	43.4	317	<u>43.7</u>	<u>314</u>	44.1	312
481.wrf	249	44.9	<u>249</u>	<u>44.9</u>	249	44.8	249	44.9	<u>249</u>	<u>44.9</u>	249	44.8
482.sphinx3	837	23.3	<u>838</u>	<u>23.3</u>	839	23.2	620	31.4	<u>620</u>	<u>31.5</u>	620	31.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6220

SPECfp2006 = 45.3

SPECfp_base2006 = 38.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Operating System Notes (Continued)

Set kernel/randomize_va_space=0 in /etc/sysctl.conf
cpuspeed stop was used to set the CPU frequency to its maximum.

Set vm/nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1104-speed-libs-revA/32:/root/work/cpu2006v1.2/amd1104-speed-libs-revA/64"

O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15"

O64_OMP_SPIN_COUNT = "800000"

O64_OMP_SPIN_USER_LOCK = "true"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6220 chips + 64GB Memory using RHEL 6.1

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6220

SPECfp2006 = 45.3

SPECfp_base2006 = 38.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Base Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso
 -OPT:alias=restricted -OPT:malloc_alg=2 -LNO:parallel_overhead=10000

C++ benchmarks:

-march=bdver1 -Ofast -static -CG:load_exe=0 -CG:p2align=0
 -INLINE:aggressive=on -HP:bdt=2m:heap=2m -D__OPEN64_FAST_SET

Fortran benchmarks:

-march=bdver1 -Ofast -LNO:blocking=off -LNO:fusion_peeling_limit=0
 -LNO:parallel_overhead=10000 -OPT:rsqrt=2 -OPT:unroll_size=256
 -HP:bdt=2m:heap=2m -apo

Benchmarks using both Fortran and C:

-march=bdver1 -Ofast -HP:bdt=2m:heap=2m -apo -mso
 -OPT:alias=restricted -OPT:malloc_alg=2 -LNO:parallel_overhead=10000
 -LNO:blocking=off -LNO:fusion_peeling_limit=0 -OPT:rsqrt=2
 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6220

SPECfp2006 = 45.3

SPECfp_base2006 = 38.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive

470.lbm: -march=bdver1 -Ofast -mso -apo -CG:sse_cse_regs=0
-LNO:prefetch_ahead=4 -CG:locs_shallow_depth=1
-CG:cmp_peep=on -CG:compute_to=on -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-OPT:alias=restricted -m3dnow -IPA:inline=off

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -CG:use_incdec=off
-INLINE:aggressive=on -WOPT:sib=on -HP

```

C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -LNO:simd=0 -D__OPEN64_FAST_SET
-static -INLINE:aggressive=on -OPT:alias=disjoint
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6220

SPECfp2006 = 45.3

SPECfp_base2006 = 38.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -HP:bdt=2m:heap=2m -WOPT:sib=on

453.povray: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:pre_local_sched=off
-INLINE:aggressive=on -HP:bdt=2m:heap=2m -OPT:transform=2
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -OPT:Ofast
-OPT:treeheight=on -LNO:blocking=off -LNO:prefetch=2
-LNO:pf2=0 -LNO:prefetch_ahead=3 -LNO:ignore_feedback=off
-LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -CG:p2align=0

416.gamess: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-OPT:unroll_times_max=2 -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m -WOPT:sib=on

434.zeusmp: -march=bdver1 -Ofast -apo -LNO:blocking=off
-LNO:interchange=off -LNO:fusion_peeling_limit=0
-OPT:treeheight=on -OPT:unroll_size=256 -CG:cmp_peep=on
-CG:compute_to=on -GRA:prioritize_by_density=on
-HP:bdt=2m:heap=2m

437.leslie3d: basepeak = yes

459.GemsFDTD: -march=bdver1 -Ofast -OPT:unroll_size=0 -LNO:fission=2
-CG:load_exe=0 -CG:local_sched_alg=2 -HP -apo

465.tonto: -march=bdver1 -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -CG:local_sched_alg=1
-IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6220

SPECfp2006 = 45.3

SPECfp_base2006 = 38.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Dec-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Peak Optimization Flags (Continued)

436.cactusADM: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off
-LNO:prefetch=2 -HP:bdt=2m:heap=2m -CG:locs_shallow_depth=1
-CG:load_exe=0 -WOPT:sib=on -apo

454.calculix: -march=bdver1 -Ofast -OPT:unroll_size=256
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-speed-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 02:03:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 February 2012.