



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint®\_rate2006 = 658**

Huawei RH2288 V2 (Intel Xeon E5-2680)

**SPECint\_rate\_base2006 = 630**

CPU2006 license: 3175


**Test date:** Feb-2012

**Test sponsor:** Huawei

**Hardware Availability:** Mar-2012

**Tested by:** Huawei

**Software Availability:** Feb-2012

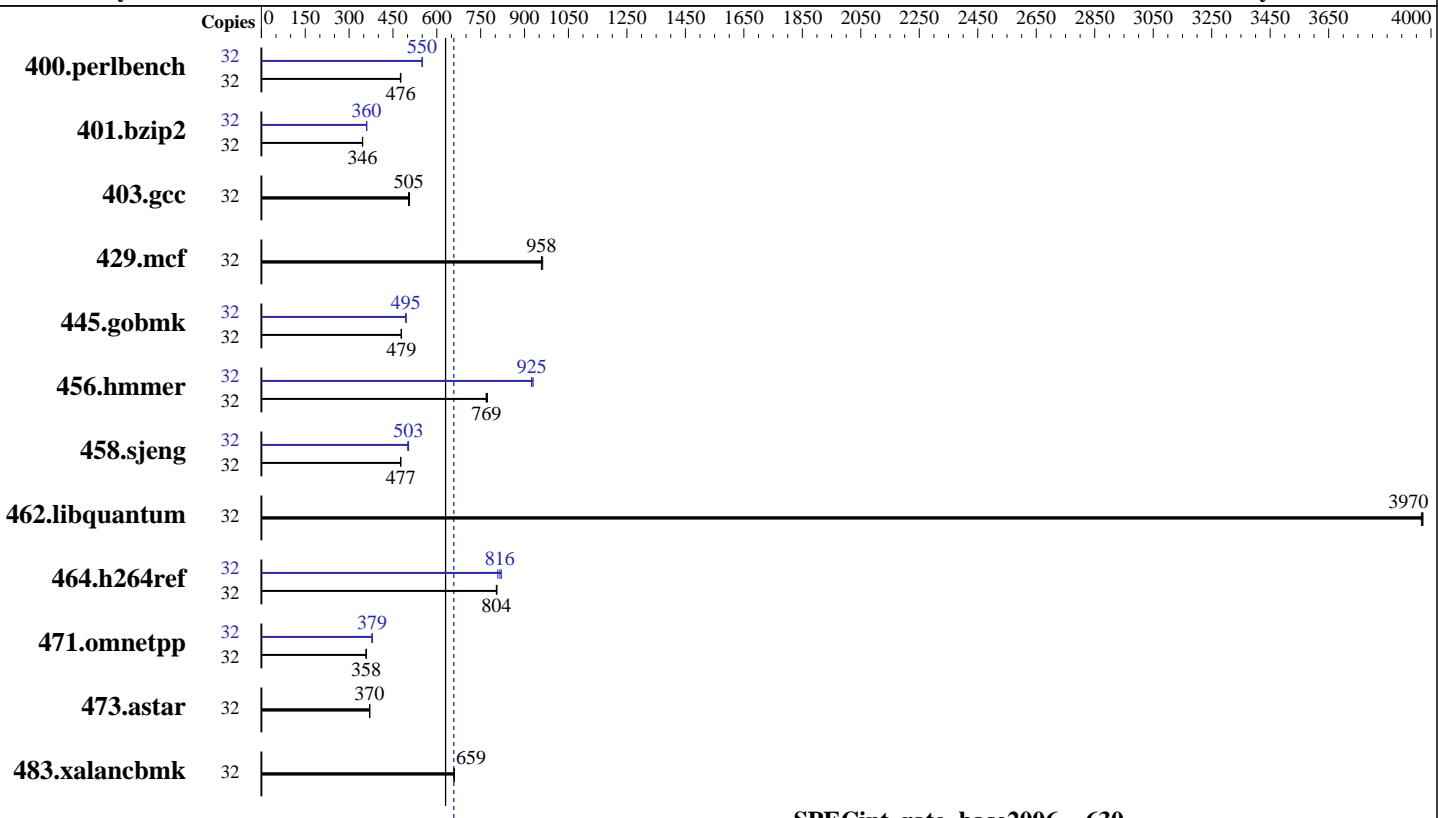

**SPECint\_rate\_base2006 = 630**

**SPECint\_rate2006 = 658**

## Hardware

CPU Name: Intel Xeon E5-2680  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 Compiler: 2.6.32-131.0.15.el6.x86\_64  
 C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 658**

Huawei RH2288 V2 (Intel Xeon E5-2680)

**SPECint\_rate\_base2006 = 630**

CPU2006 license: 3175

Test date: Feb-2012

Test sponsor: Huawei

Hardware Availability: Mar-2012

Tested by: Huawei

Software Availability: Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	656	477	658	475	<b>656</b>	<b>476</b>	32	568	550	<b>568</b>	<b>550</b>	569	549
401.bzip2	32	<b>892</b>	<b>346</b>	891	346	894	346	32	857	360	<b>858</b>	<b>360</b>	858	360
403.gcc	32	<b>511</b>	<b>505</b>	508	507	512	503	32	<b>511</b>	<b>505</b>	508	507	512	503
429.mcf	32	<b>305</b>	<b>958</b>	303	962	305	958	32	<b>305</b>	<b>958</b>	303	962	305	958
445.gobmk	32	700	479	703	478	<b>701</b>	<b>479</b>	32	678	495	<b>679</b>	<b>495</b>	680	494
456.hmmer	32	<b>388</b>	<b>769</b>	388	769	386	773	32	321	929	323	924	<b>323</b>	<b>925</b>
458.sjeng	32	<b>813</b>	<b>477</b>	813	476	812	477	32	<b>770</b>	<b>503</b>	774	500	769	503
462.libquantum	32	167	3970	167	3970	<b>167</b>	<b>3970</b>	32	167	3970	167	3970	<b>167</b>	<b>3970</b>
464.h264ref	32	879	806	<b>881</b>	<b>804</b>	881	803	32	876	809	863	821	<b>868</b>	<b>816</b>
471.omnetpp	32	<b>558</b>	<b>358</b>	558	358	558	359	32	529	378	528	379	<b>528</b>	<b>379</b>
473.astar	32	607	370	606	371	<b>607</b>	<b>370</b>	32	607	370	606	371	<b>607</b>	<b>370</b>
483.xalancbmk	32	335	660	335	659	<b>335</b>	<b>659</b>	32	335	660	335	659	<b>335</b>	<b>659</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /speccpu/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #$
running on localhost.localdomain Thu Feb  9 11:08:34 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 @ 2.70GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 658

Huawei RH2288 V2 (Intel Xeon E5-2680)

SPECint\_rate\_base2006 = 630

CPU2006 license: 3175

Test date: Feb-2012

Test sponsor: Huawei

Hardware Availability: Mar-2012

Tested by: Huawei

Software Availability: Feb-2012

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      132133108 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.1 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 9 00:08

SPEC is set to: /speccpu
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/sda1        ext3   193G  100G   84G  55%  /


Additional information from dmidecode:

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/speccpu/libs/32:/speccpu/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

Transparent Huge Pages disabled with:

```
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V2 (Intel Xeon E5-2680)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECint\_rate2006 = 658**

**SPECint\_rate\_base2006 = 630**

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V2 (Intel Xeon E5-2680)

SPECint\_rate2006 = 658

CPU2006 license: 3175

Test date: Feb-2012

Test sponsor: Huawei

Hardware Availability: Mar-2012

Tested by: Huawei

Software Availability: Feb-2012

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
456.hmmer: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LINUX  
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
  
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias  
  
403.gcc: basepeak = yes  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
  
473.astar: basepeak = yes  
  
483.xalancbmk: basepeak = yes
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 658

Huawei RH2288 V2 (Intel Xeon E5-2680)

SPECint\_rate\_base2006 = 630

CPU2006 license: 3175

Test date: Feb-2012

Test sponsor: Huawei

Hardware Availability: Mar-2012

Tested by: Huawei

Software Availability: Feb-2012

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:50:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 March 2012.