



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®_rate2006 = 231

PRIMERGY BX924 S3, Intel Xeon E5-2660, 2.20 GHz

SPECfp_rate_base2006 = 224

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

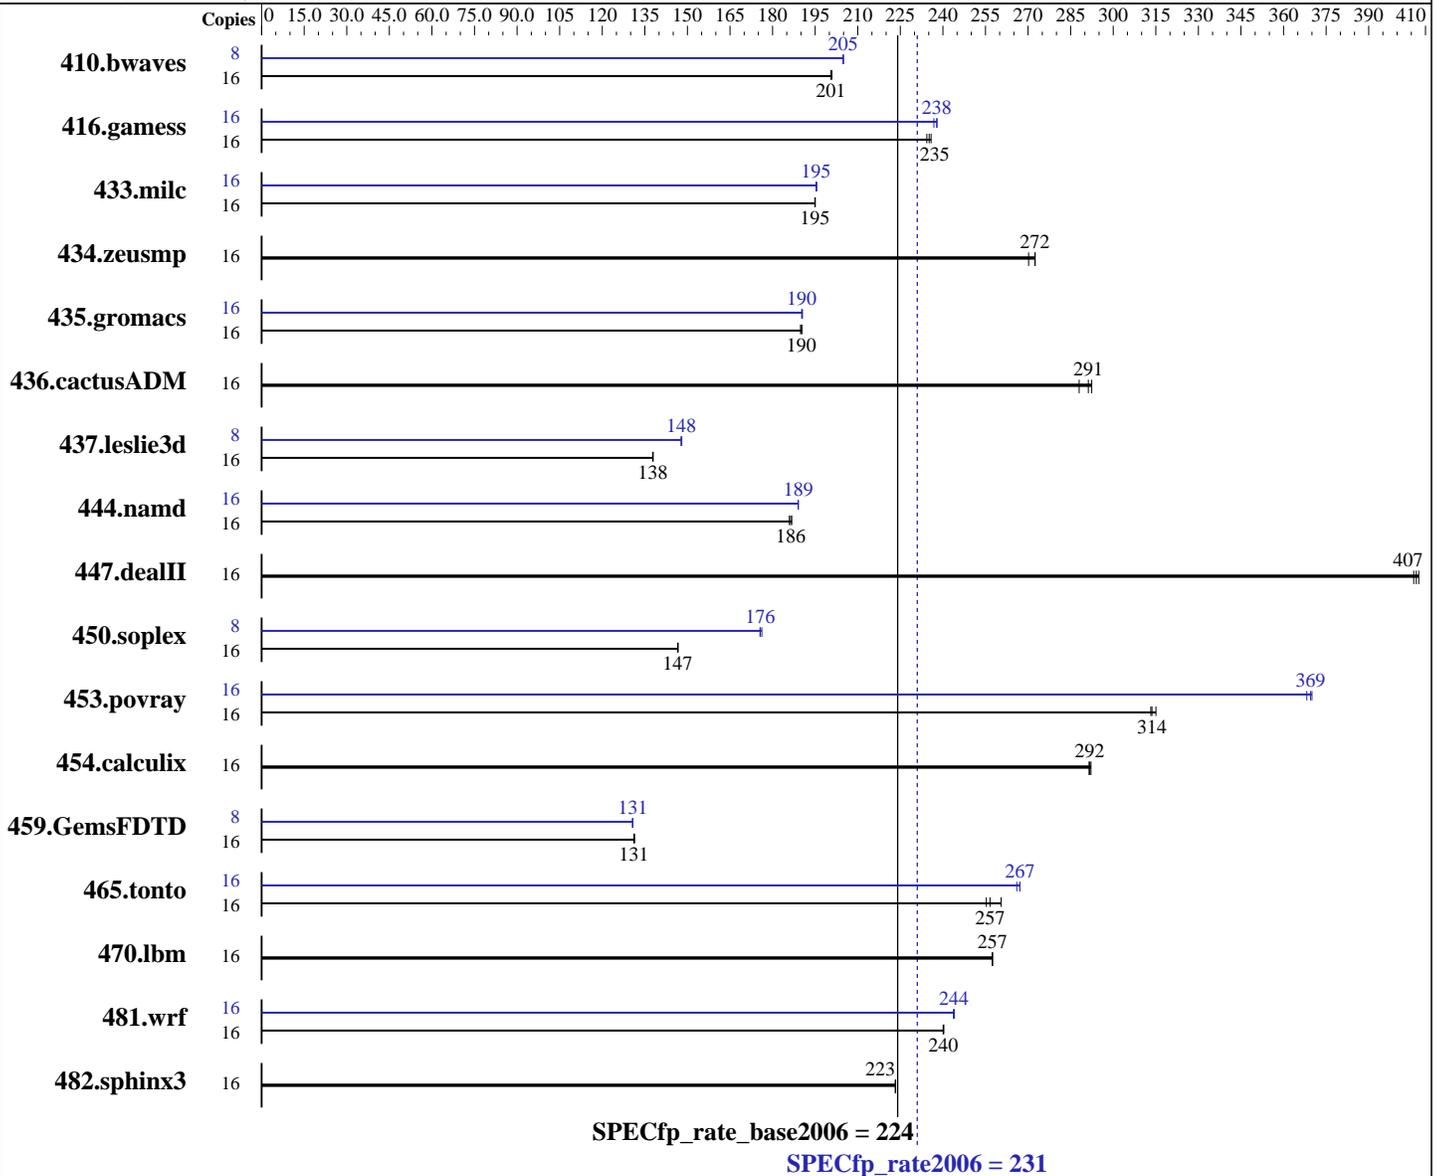

Hardware

CPU Name: Intel Xeon E5-2660
 CPU Characteristics: Intel Turbo Boost Technology up to 3.0 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = **231**

PRIMERGY BX924 S3, Intel Xeon E5-2660, 2.20 GHz

SPECfp_rate_base2006 = **224**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (8 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: PRIMERGY SX940 S1 for hw_disk

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1082	201	1084	201	1084	201	8	531	205	531	205	531	205
416.gamess	16	1332	235	1328	236	1337	234	16	1323	237	1317	238	1317	238
433.milc	16	753	195	753	195	754	195	16	751	196	752	195	752	195
434.zeusmp	16	534	272	539	270	534	272	16	534	272	539	270	534	272
435.gromacs	16	601	190	602	190	600	190	16	600	191	600	190	600	190
436.cactusADM	16	657	291	654	292	664	288	16	657	291	654	292	664	288
437.leslie3d	16	1092	138	1091	138	1090	138	8	508	148	509	148	509	148
444.namd	16	689	186	690	186	687	187	16	679	189	679	189	679	189
447.dealII	16	449	408	451	406	450	407	16	449	408	451	406	450	407
450.soplex	16	910	147	910	147	910	147	8	380	176	380	176	379	176
453.povray	16	270	315	272	313	271	314	16	230	370	231	368	230	369
454.calculix	16	453	291	452	292	452	292	16	453	291	452	292	452	292
459.GemsFDTD	16	1292	131	1294	131	1294	131	8	649	131	650	131	649	131
465.tonto	16	614	257	604	261	617	255	16	589	267	589	267	592	266
470.lbm	16	854	257	854	257	854	258	16	854	257	854	257	854	258
481.wrf	16	744	240	744	240	744	240	16	732	244	733	244	733	244
482.sphinx3	16	1396	223	1396	223	1397	223	16	1396	223	1396	223	1397	223

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 231

PRIMERGY BX924 S3, Intel Xeon E5-2660, 2.20 GHz

SPECfp_rate_base2006 = 224

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2012
Hardware Availability: Mar-2012
Software Availability: Dec-2011

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 231

PRIMERGY BX924 S3, Intel Xeon E5-2660, 2.20 GHz

SPECfp_rate_base2006 = 224

CPU2006 license: 19

Test date: Jan-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 231

PRIMERGY BX924 S3, Intel Xeon E5-2660, 2.20 GHz

SPECfp_rate_base2006 = 224

CPU2006 license: 19

Test date: Jan-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

Peak Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 231

PRIMERGY BX924 S3, Intel Xeon E5-2660, 2.20 GHz

SPECfp_rate_base2006 = 224

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 03:31:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 March 2012.