



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2670, 2.60 GHz

**SPECfp®\_rate2006 = 484**

**SPECfp\_rate\_base2006 = 469**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

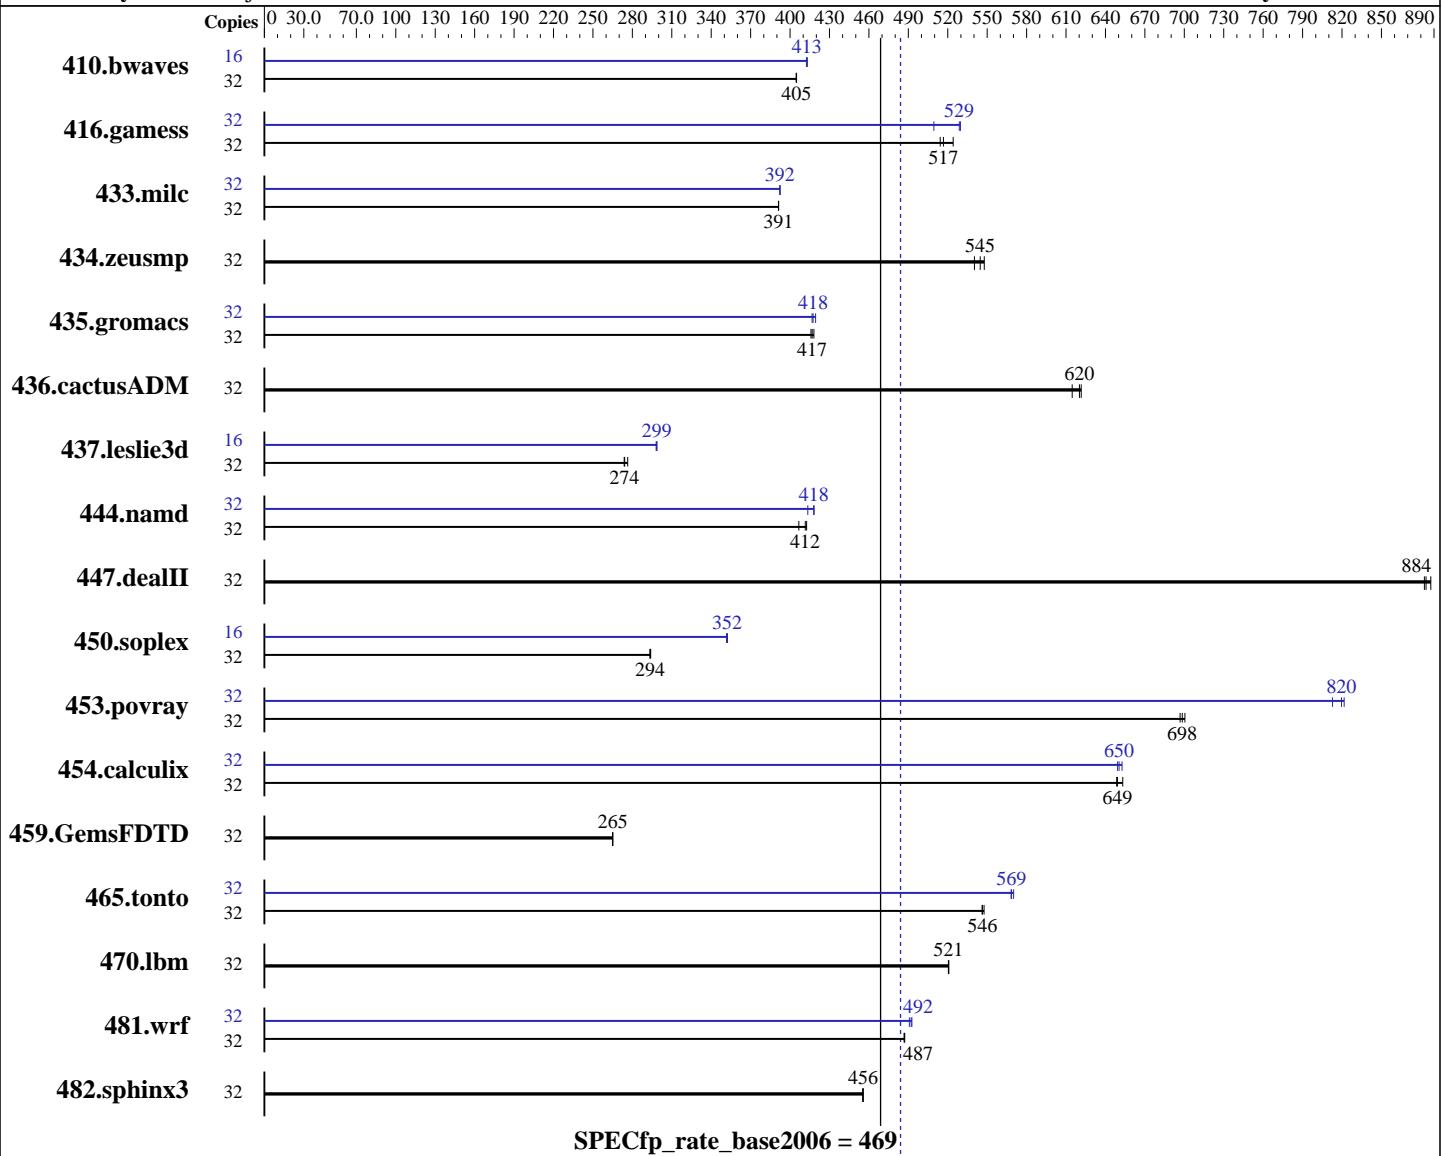

## Hardware

CPU Name: Intel Xeon E5-2670  
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
CPU MHz: 2600  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2670, 2.60 GHz

**SPECfp\_rate2006 = 484**

**SPECfp\_rate\_base2006 = 469**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: PRIMERGY SX940 S1 for hw\_disk

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<b>1074</b>	<b>405</b>	1074	405	1075	405	16	<b>527</b>	<b>412</b>	<b>527</b>	<b>413</b>	526	413
416.gamess	32	1218	514	1195	524	<b>1213</b>	<b>517</b>	32	1230	509	1183	530	<b>1185</b>	<b>529</b>
433.milc	32	751	391	751	391	<b>751</b>	<b>391</b>	32	<b>749</b>	<b>392</b>	749	392	749	392
434.zeusmp	32	<b>535</b>	<b>545</b>	532	548	539	540	32	<b>535</b>	<b>545</b>	532	548	539	540
435.gromacs	32	546	418	549	416	<b>548</b>	<b>417</b>	32	545	419	548	417	<b>547</b>	<b>418</b>
436.cactusADM	32	<b>617</b>	<b>620</b>	615	622	622	615	32	<b>617</b>	<b>620</b>	615	622	622	615
437.leslie3d	32	1088	276	<b>1097</b>	<b>274</b>	1099	274	16	504	299	505	298	<b>504</b>	<b>299</b>
444.namd	32	622	413	631	407	<b>624</b>	<b>412</b>	32	621	414	613	418	<b>614</b>	<b>418</b>
447.dealII	32	412	888	<b>414</b>	<b>884</b>	415	883	32	412	888	<b>414</b>	<b>884</b>	415	883
450.soplex	32	910	293	<b>909</b>	<b>294</b>	908	294	16	380	352	379	352	<b>379</b>	<b>352</b>
453.povray	32	243	700	<b>244</b>	<b>698</b>	244	697	32	207	822	209	813	<b>208</b>	<b>820</b>
454.calculix	32	404	653	<b>407</b>	<b>649</b>	407	649	32	405	653	<b>406</b>	<b>650</b>	407	649
459.GemsFDTD	32	1281	265	1281	265	<b>1281</b>	<b>265</b>	32	1281	265	1281	265	<b>1281</b>	<b>265</b>
465.tonto	32	577	546	<b>576</b>	<b>546</b>	575	548	32	<b>554</b>	<b>569</b>	552	570	554	568
470.lbm	32	<b>844</b>	<b>521</b>	844	521	845	520	32	<b>844</b>	<b>521</b>	844	521	845	520
481.wrf	32	734	487	<b>734</b>	<b>487</b>	734	487	32	728	491	725	493	<b>726</b>	<b>492</b>
482.sphinx3	32	1369	456	1370	455	<b>1369</b>	<b>456</b>	32	1369	456	1370	455	<b>1369</b>	<b>456</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
 LD\_LIBRARY\_PATH = "/SPECcpu2006/lib32:/SPECcpu2006/lib64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2670, 2.60 GHz

**SPECfp\_rate2006 = 484**

**SPECfp\_rate\_base2006 = 469**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2670, 2.60 GHz

**SPECfp\_rate2006 = 484**

**SPECfp\_rate\_base2006 = 469**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2670, 2.60 GHz

**SPECfp\_rate2006 = 484**

**SPECfp\_rate\_base2006 = 469**

CPU2006 license: 19

Test date: Feb-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX924 S3, Intel Xeon E5-2670, 2.60 GHz

**SPECfp\_rate2006 = 484**

**SPECfp\_rate\_base2006 = 469**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Feb-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -static -auto-ilp32 -opt-mem-layout-trans=3
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
               -opt-mem-layout-trans=3
```

```
481.wrf: Same as 454.calculix
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:28:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 March 2012.