



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp®\_rate2006 = 335

NovaScale T840 F3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

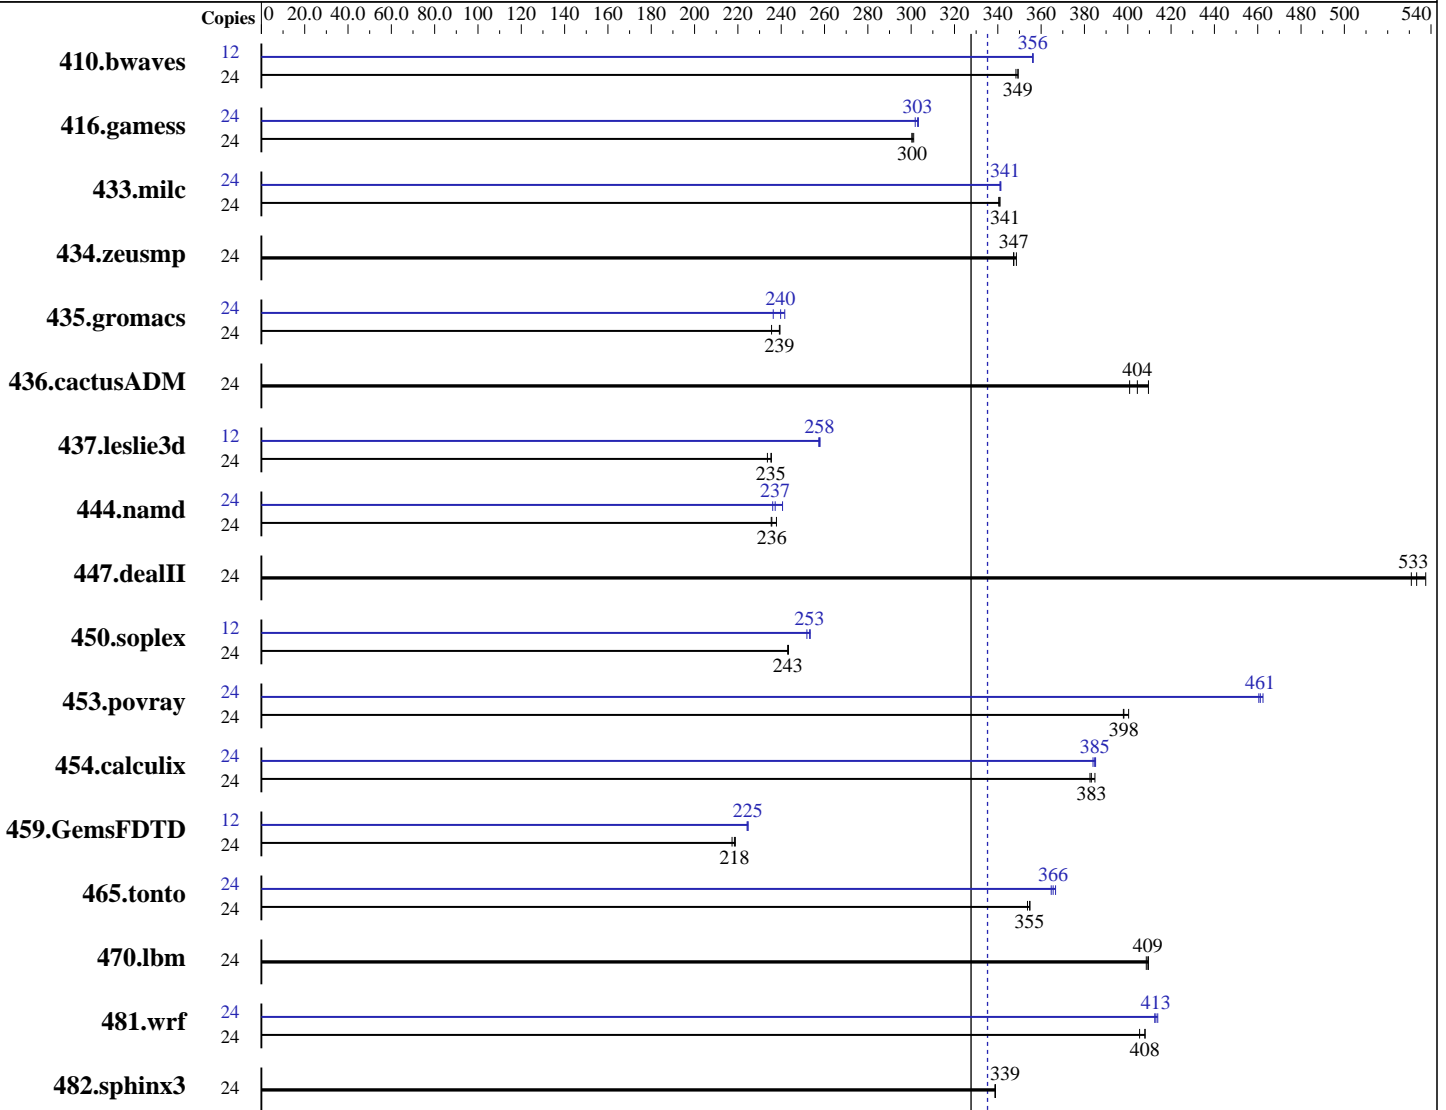

SPECfp\_rate\_base2006 = 328

SPECfp\_rate2006 = 335

### Hardware

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.9-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = **335**

NovaScale T840 F3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = **328**

CPU2006 license: 20

Test date: Feb-2012

Test sponsor: Bull SAS

Hardware Availability: Mar-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 1 x 1 TB 7200 RPM SATA  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	<b>934</b>	<b>349</b>	934	349	936	348	12	458	356	<b>458</b>	<b>356</b>	458	356
416.gamess	24	<b>1564</b>	<b>300</b>	1564	300	1560	301	24	1549	303	1557	302	<b>1551</b>	<b>303</b>
433.milc	24	<b>646</b>	<b>341</b>	647	340	646	341	24	<b>646</b>	<b>341</b>	645	341	646	341
434.zeusmp	24	627	349	<b>629</b>	<b>347</b>	629	347	24	627	349	<b>629</b>	<b>347</b>	629	347
435.gromacs	24	716	239	727	236	<b>717</b>	<b>239</b>	24	<b>715</b>	<b>240</b>	709	242	725	236
436.cactusADM	24	<b>709</b>	<b>404</b>	715	401	700	410	24	<b>709</b>	<b>404</b>	715	401	700	410
437.leslie3d	24	<b>959</b>	<b>235</b>	958	235	966	234	12	438	257	<b>438</b>	<b>258</b>	437	258
444.namd	24	<b>817</b>	<b>236</b>	809	238	818	235	24	815	236	800	241	<b>811</b>	<b>237</b>
447.dealII	24	511	538	517	531	<b>515</b>	<b>533</b>	24	511	538	517	531	<b>515</b>	<b>533</b>
450.soplex	24	824	243	822	243	<b>823</b>	<b>243</b>	12	397	252	395	253	<b>395</b>	<b>253</b>
453.povray	24	<b>321</b>	<b>398</b>	319	400	321	398	24	<b>277</b>	<b>461</b>	276	462	277	461
454.calculix	24	<b>517</b>	<b>383</b>	514	385	518	383	24	516	384	<b>515</b>	<b>385</b>	514	385
459.GemsFDTD	24	1164	219	<b>1166</b>	<b>218</b>	1172	217	12	567	225	<b>567</b>	<b>225</b>	568	224
465.tonto	24	668	354	<b>666</b>	<b>355</b>	666	355	24	644	367	648	365	<b>646</b>	<b>366</b>
470.lbm	24	807	409	<b>806</b>	<b>409</b>	805	410	24	807	409	<b>806</b>	<b>409</b>	805	410
481.wrf	24	657	408	<b>657</b>	<b>408</b>	661	405	24	650	412	<b>649</b>	<b>413</b>	648	414
482.sphinx3	24	1380	339	<b>1380</b>	<b>339</b>	1381	339	24	1380	339	<b>1380</b>	<b>339</b>	1381	339

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 335

NovaScale T840 F3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Feb-2012  
Hardware Availability: Mar-2012  
Software Availability: Feb-2012

### Platform Notes

System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost set to Enabled  
C States/C1E set to Enabled  
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on linux-Sandy Sat Feb 18 00:34:40 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 0 @ 2.00GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      132122692 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux linux-Sandy 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012
(54ddfaf) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 17 09:55 last=5
```

```
SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  197G   69G  119G   37% /
```

Additional information from dmidecode:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 335

NovaScale T840 F3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Feb-2012  
Hardware Availability: Mar-2012  
Software Availability: Feb-2012

### Platform Notes (Continued)

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
The Dell PowerEdge T620 and  
the Bull NovaScale T840 F3 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge T620 model  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 335

NovaScale T840 F3 (Intel Xeon E5-2620, 2.00 GHz)

SPECfp\_rate\_base2006 = 328

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2012

Hardware Availability: Mar-2012

Software Availability: Feb-2012

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp\_rate2006 = 335**

NovaScale T840 F3 (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_rate\_base2006 = 328**

**CPU2006 license:** 20

**Test date:** Feb-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** Mar-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

```

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp\_rate2006 = 335**

NovaScale T840 F3 (Intel Xeon E5-2620, 2.00 GHz)

**SPECfp\_rate\_base2006 = 328**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Dell Inc.

**Test date:** Feb-2012  
**Hardware Availability:** Mar-2012  
**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120328.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:06:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 April 2012.