



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECint®2006 = 35.9**

ProLiant DL580 G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_base2006 = 33.3**

CPU2006 license: 3


Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

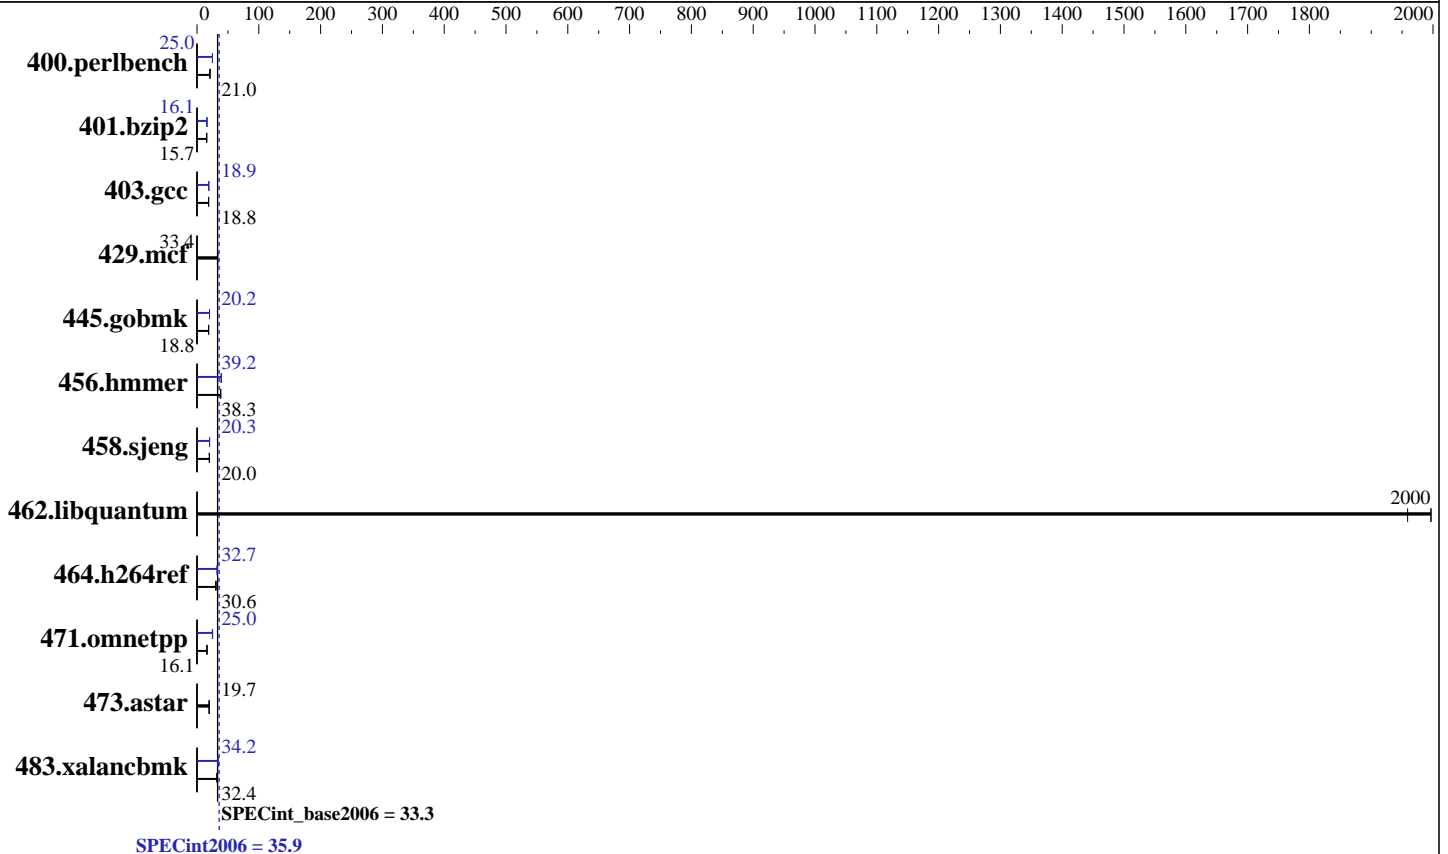

### Hardware

CPU Name: Intel Xeon E7-4860  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 24 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 4 x 146 GB 15 K SAS, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, (Santiago)  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G7  
(2.26 GHz, Intel Xeon E7-4860)

SPECint2006 = **35.9**

SPECint\_base2006 = **33.3**

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Apr-2012  
Hardware Availability: Apr-2011  
Software Availability: Dec-2011

## Results Table

| Benchmark      | Base        |             |            |             |            |             | Peak        |             |            |             |            |             |
|----------------|-------------|-------------|------------|-------------|------------|-------------|-------------|-------------|------------|-------------|------------|-------------|
|                | Seconds     | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       | Seconds     | Ratio       | Seconds    | Ratio       | Seconds    | Ratio       |
| 400.perlbench  | <b>464</b>  | <b>21.0</b> | 464        | 21.0        | 464        | 21.1        | 390         | 25.1        | <b>392</b> | <b>25.0</b> | 392        | 24.9        |
| 401.bzip2      | 616         | 15.7        | 616        | 15.7        | <b>616</b> | <b>15.7</b> | 600         | 16.1        | 599        | 16.1        | <b>600</b> | <b>16.1</b> |
| 403.gcc        | 430         | 18.7        | <b>429</b> | <b>18.8</b> | 428        | 18.8        | 425         | 18.9        | <b>425</b> | <b>18.9</b> | 422        | 19.1        |
| 429.mcf        | <b>273</b>  | <b>33.4</b> | 273        | 33.5        | 276        | 33.1        | <b>273</b>  | <b>33.4</b> | 273        | 33.5        | 276        | 33.1        |
| 445.gobmk      | <b>558</b>  | <b>18.8</b> | 558        | 18.8        | 558        | 18.8        | 518         | 20.2        | <b>519</b> | <b>20.2</b> | 519        | 20.2        |
| 456.hammer     | <b>244</b>  | <b>38.3</b> | 244        | 38.3        | 244        | 38.3        | <b>238</b>  | <b>39.2</b> | 238        | 39.2        | 238        | 39.2        |
| 458.sjeng      | <b>604</b>  | <b>20.0</b> | 604        | 20.0        | 604        | 20.0        | 595         | 20.3        | 596        | 20.3        | <b>596</b> | <b>20.3</b> |
| 462.libquantum | <b>10.4</b> | <b>2000</b> | 10.6       | 1960        | 10.4       | 2000        | <b>10.4</b> | <b>2000</b> | 10.6       | 1960        | 10.4       | 2000        |
| 464.h264ref    | 723         | 30.6        | 724        | 30.6        | <b>724</b> | <b>30.6</b> | 677         | 32.7        | 677        | 32.7        | <b>677</b> | <b>32.7</b> |
| 471.omnetpp    | 388         | 16.1        | <b>388</b> | <b>16.1</b> | 384        | 16.3        | <b>250</b>  | <b>25.0</b> | 247        | 25.4        | 251        | 24.9        |
| 473.astar      | 354         | 19.8        | <b>356</b> | <b>19.7</b> | 358        | 19.6        | 354         | 19.8        | <b>356</b> | <b>19.7</b> | 358        | 19.6        |
| 483.xalancbmk  | 213         | 32.4        | 214        | 32.3        | <b>213</b> | <b>32.4</b> | 201         | 34.3        | 202        | 34.1        | <b>201</b> | <b>34.2</b> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling  
Collaborative Power Control set to Disabled  
Intel Hyperthreading set to Disabled  
Sysinfo program /cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on dl580g7-da Mon Apr 23 03:14:59 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7- 4860 @ 2.27GHz  
4 "physical id"s (chips)  
40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECint2006 = 35.9**

ProLiant DL580 G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_base2006 = 33.3**

**CPU2006 license:** 3

**Test date:** Apr-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2011

### Platform Notes (Continued)

```

caution.)
  cpu cores : 10
  siblings  : 10
  physical 0: cores 0 1 2 8 9 16 17 18 24 25
  physical 1: cores 0 1 2 8 9 16 17 18 24 25
  physical 2: cores 0 1 2 8 9 16 17 18 24 25
  physical 3: cores 0 1 2 8 9 16 17 18 24 25
cache size : 24576 KB

```

```

From /proc/meminfo
MemTotal:      529265536 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux dl580g7-da 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 23 03:07

```

SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3       ext4      537G  102G  408G  20% /

```

```

Additional information from dmidecode:
BIOS HP P65 05/23/2011
Memory:
 32x Not Specified Not Specified 16 GB 1333 MHz 2 rank

```

(End of data from sysinfo program)

### General Notes

```

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64"
OMP_NUM_THREADS = "20"

```

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

ProLiant DL580 G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint2006 = 35.9**

**SPECint\_base2006 = 33.3**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Apr-2012

**Hardware Availability:** Apr-2011

**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/smartheap -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 35.9**

ProLiant DL580 G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_base2006 = 33.3**

**CPU2006 license:** 3

**Test date:** Apr-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2011

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint2006 = 35.9**

ProLiant DL580 G7  
(2.26 GHz, Intel Xeon E7-4860)

**SPECint\_base2006 = 33.3**

**CPU2006 license:** 3

**Test date:** Apr-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2011

**Tested by:** Hewlett-Packard Company

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:51:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 May 2012.