



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.00 GHz, Intel Xeon E7-4820)

SPECint®2006 = 29.5

SPECint_base2006 = 27.8

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2012

Hardware Availability: Apr-2011

Software Availability: Dec-2011

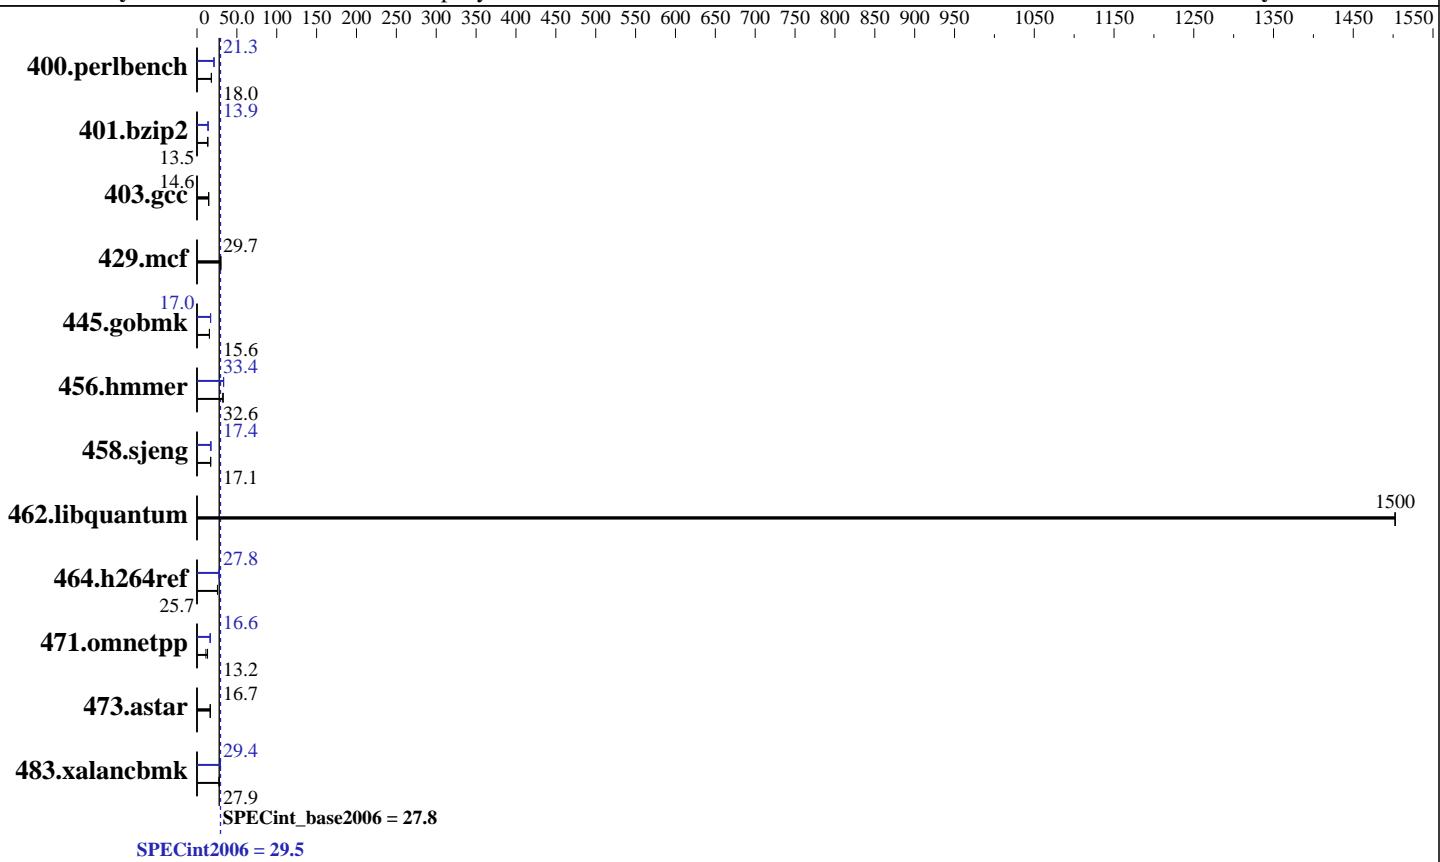

Hardware

CPU Name: Intel Xeon E7-4820
CPU Characteristics: Intel Turbo Boost Technology up to 2.26 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 18 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 4 x 146 GB 15 K SAS, RAID 0
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, (Santiago)
Compiler: Kernel 2.6.32-220.el6.x86_64
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel: Yes
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.00 GHz, Intel Xeon E7-4820)

SPECint2006 = 29.5

SPECint_base2006 = 27.8

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	540	18.1	542	18.0	541	18.0	459	21.3	459	21.3	458	21.3
401.bzip2	716	13.5	716	13.5	717	13.5	696	13.9	696	13.9	696	13.9
403.gcc	551	14.6	551	14.6	549	14.7	551	14.6	551	14.6	549	14.7
429.mcf	305	29.9	307	29.7	307	29.7	305	29.9	307	29.7	307	29.7
445.gobmk	672	15.6	672	15.6	673	15.6	616	17.0	617	17.0	615	17.1
456.hmmer	287	32.6	286	32.6	286	32.6	280	33.4	280	33.3	280	33.4
458.sjeng	707	17.1	708	17.1	707	17.1	698	17.3	697	17.4	697	17.4
462.libquantum	13.8	1500	13.8	1500	13.8	1500	13.8	1500	13.8	1500	13.8	1500
464.h264ref	864	25.6	861	25.7	861	25.7	796	27.8	797	27.8	796	27.8
471.omnetpp	472	13.2	475	13.2	559	11.2	376	16.6	376	16.6	380	16.5
473.astar	421	16.7	422	16.6	421	16.7	421	16.7	422	16.6	421	16.7
483.xalancbmk	250	27.6	247	27.9	246	28.1	235	29.3	235	29.4	234	29.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Platform Notes

BIOS Configuration:

HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling
Collaborative Power Control set to Disabled
Intel Hyperthreading set to Disabled
Sysinfo program /cpu2006/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on dl580g7-da Tue Apr 24 05:53:35 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7- 4820 @ 2.00GHz
        4 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.00 GHz, Intel Xeon E7-4820)

SPECint2006 = 29.5

SPECint_base2006 = 27.8

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2011

Tested by: Hewlett-Packard Company

Software Availability: Dec-2011

Platform Notes (Continued)

```
caution.)  
    cpu cores : 8  
    siblings   : 8  
    physical 0: cores 0 1 8 9 16 17 24 25  
    physical 1: cores 0 1 2 9 16 18 24 25  
    physical 2: cores 0 1 2 8 17 18 24 25  
    physical 3: cores 0 1 2 9 16 18 24 25  
    cache size : 18432 KB  
  
From /proc/meminfo  
MemTotal:      529265536 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
/usr/bin/lsb_release -d  
Red Hat Enterprise Linux Server release 6.2 (Santiago)  
  
From /etc/*release* /etc/*version*  
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server  
  
uname -a:  
Linux dl580g7-da 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011  
x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Apr 24 04:52  
  
SPEC is set to: /cpu2006  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda3       ext4  537G  102G  408G  20% /  
  
Additional information from dmidecode:  
BIOS HP P65 05/23/2011  
Memory:  
32x Not Specified Not Specified 16 GB 1333 MHz 2 rank  
  
(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/cpu2006/lib32:/cpu2006/lib64"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.00 GHz, Intel Xeon E7-4820)

SPECint2006 = 29.5

SPECint_base2006 = 27.8

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2012

Hardware Availability: Apr-2011

Software Availability: Dec-2011

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.00 GHz, Intel Xeon E7-4820)

SPECint2006 = 29.5

SPECint_base2006 = 27.8

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2012

Hardware Availability: Apr-2011

Software Availability: Dec-2011

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias`

456.hammer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32 -ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G7
(2.00 GHz, Intel Xeon E7-4820)

SPECint2006 = 29.5

SPECint_base2006 = 27.8

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2012

Hardware Availability: Apr-2011

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:59:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 May 2012.