



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp®2006 = 64.5**

Express5800/R120d-1M (Intel Xeon E5-2630L)

**SPECfp\_base2006 = 61.9**

CPU2006 license: 9006


Test date: Apr-2012

Test sponsor: NEC Corporation

Hardware Availability: Apr-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

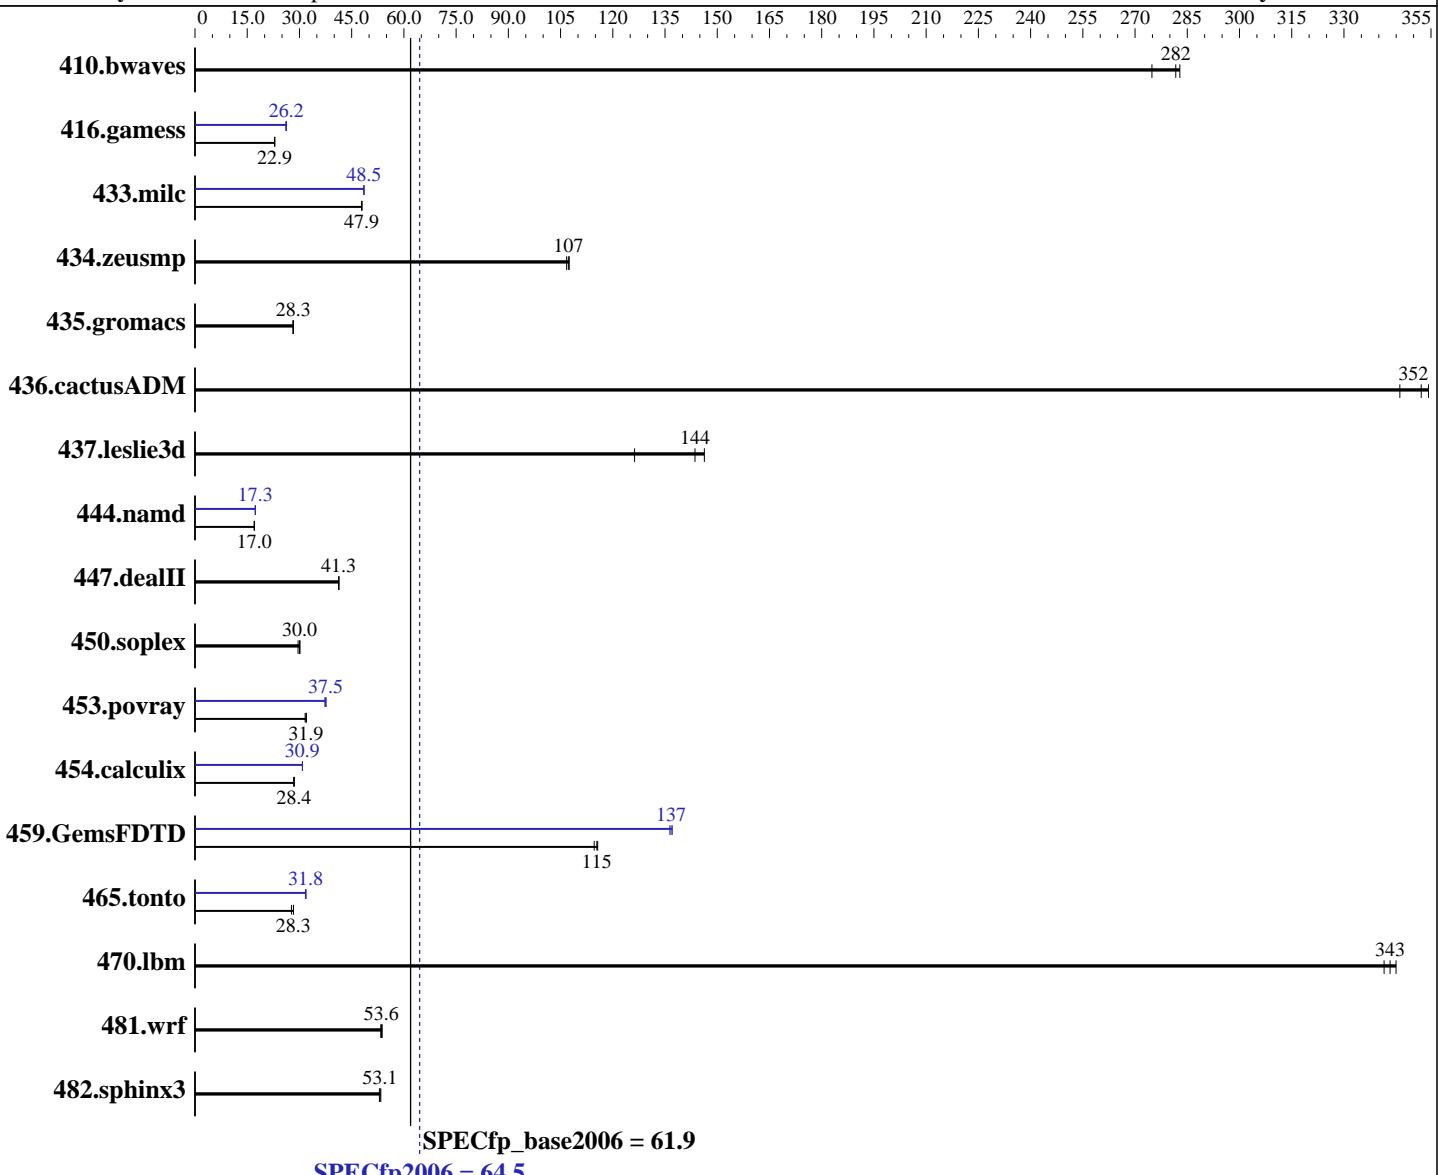

## Hardware

CPU Name: Intel Xeon E5-2630L  
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: Kernel 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120d-1M (Intel Xeon E5-2630L)

**SPECfp2006 = 64.5**

**CPU2006 license:** 9006

**Test date:** Apr-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	49.4	275	<b>48.2</b>	<b>282</b>	48.0	283	49.4	275	<b>48.2</b>	<b>282</b>	48.0	283
416.gamess	854	22.9	<b>856</b>	<b>22.9</b>	856	22.9	746	26.2	750	26.1	<b>747</b>	<b>26.2</b>
433.milc	192	47.9	192	47.9	<b>192</b>	<b>47.9</b>	189	48.5	189	48.5	<b>189</b>	<b>48.5</b>
434.zeusmp	<b>84.9</b>	<b>107</b>	85.3	107	84.7	107	<b>84.9</b>	<b>107</b>	85.3	107	84.7	107
435.gromacs	<b>253</b>	<b>28.3</b>	253	28.3	254	28.1	<b>253</b>	<b>28.3</b>	253	28.3	254	28.1
436.cactusADM	34.5	346	33.7	354	<b>33.9</b>	<b>352</b>	34.5	346	33.7	354	<b>33.9</b>	<b>352</b>
437.leslie3d	74.5	126	<b>65.5</b>	<b>144</b>	64.3	146	74.5	126	<b>65.5</b>	<b>144</b>	64.3	146
444.namd	<b>471</b>	<b>17.0</b>	471	17.0	470	17.0	463	17.3	463	17.3	<b>463</b>	<b>17.3</b>
447.dealII	277	41.3	277	41.3	<b>277</b>	<b>41.3</b>	277	41.3	277	41.3	<b>277</b>	<b>41.3</b>
450.soplex	<b>278</b>	<b>30.0</b>	282	29.6	277	30.2	<b>278</b>	<b>30.0</b>	282	29.6	277	30.2
453.povray	166	32.0	<b>167</b>	<b>31.9</b>	168	31.6	141	37.7	143	37.3	<b>142</b>	<b>37.5</b>
454.calculix	289	28.5	291	28.4	<b>290</b>	<b>28.4</b>	267	30.9	267	30.9	<b>267</b>	<b>30.9</b>
459.GemsFDTD	91.7	116	<b>91.9</b>	<b>115</b>	92.5	115	77.8	136	<b>77.6</b>	<b>137</b>	77.4	137
465.tonto	355	27.7	<b>348</b>	<b>28.3</b>	348	28.3	<b>309</b>	<b>31.8</b>	309	31.9	310	31.7
470.lbm	<b>40.0</b>	<b>343</b>	39.8	345	40.2	342	<b>40.0</b>	<b>343</b>	39.8	345	40.2	342
481.wrf	<b>209</b>	<b>53.6</b>	209	53.4	208	53.8	<b>209</b>	<b>53.6</b>	209	53.4	208	53.8
482.sphinx3	<b>367</b>	<b>53.1</b>	365	53.4	368	53.0	<b>367</b>	<b>53.1</b>	365	53.4	368	53.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120d-1M (Intel Xeon E5-2630L)

**SPECfp2006 = 64.5**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

## General Notes (Continued)

OMP\_NUM\_THREADS = "12"

The Express5800/R120d-1M and  
the Express5800/R120d-2M models are electronically equivalent.  
The results have been measured on the Express5800/R120d-2M model.

Added glibc-static-2.12-1.47.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-1M (Intel Xeon E5-2630L)

**SPECfp2006 = 64.5**

**SPECfp\_base2006 = 61.9**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120d-1M (Intel Xeon E5-2630L)

**SPECfp2006 = 64.5**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
                -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
             -opt-malloc-options=3 -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120d-1M (Intel Xeon E5-2630L)

**SPECfp2006 = 64.5**

**SPECfp\_base2006 = 61.9**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2012

**Hardware Availability:** Apr-2012

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:47:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.