



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(3.30 GHz, Intel Xeon E5-2643)

**SPECint\_rate2006 = 379**

**SPECint\_rate\_base2006 = 362**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** May-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Mar-2012

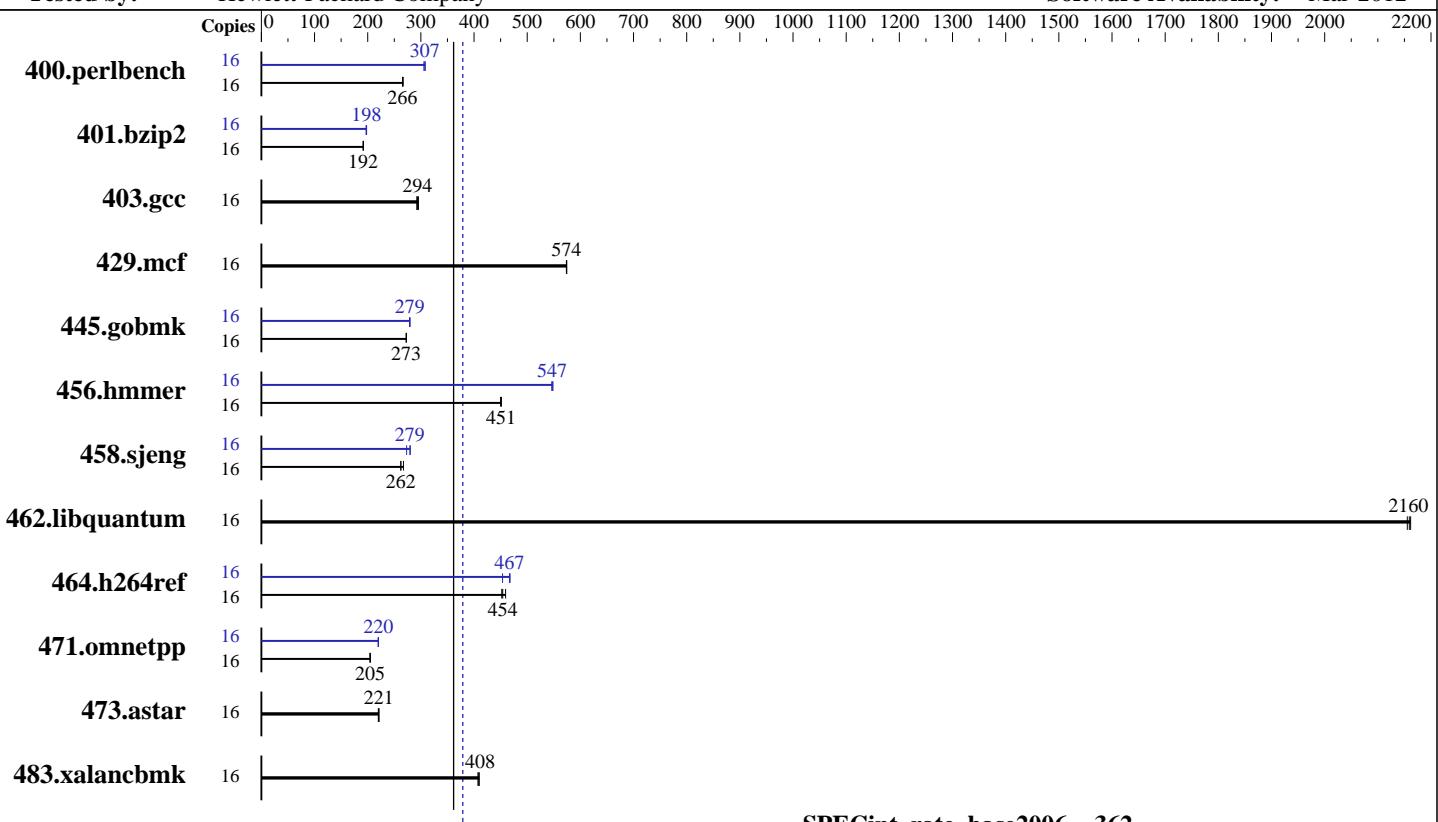

**SPECint\_rate\_base2006 = 362**

**SPECint\_rate2006 = 379**

### Hardware

CPU Name: Intel Xeon E5-2643  
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
CPU MHz: 3300  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 2 x 146 GB 15 K SAS, RAID 1  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, (Santiago)  
Compiler: Kernel 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V9.01  
HP Array Configuration Utility, CLI version



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(3.30 GHz, Intel Xeon E5-2643)

**SPECint\_rate2006 = 379**

**SPECint\_rate\_base2006 = 362**

CPU2006 license: 3

Test date: May-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	586	267	589	265	<b>588</b>	<b>266</b>	16	<b>508</b>	<b>307</b>	511	306	507	308
401.bzip2	16	805	192	806	192	<b>806</b>	<b>192</b>	16	780	198	<b>781</b>	<b>198</b>	784	197
403.gcc	16	441	292	436	295	<b>439</b>	<b>294</b>	16	441	292	436	295	<b>439</b>	<b>294</b>
429.mcf	16	254	574	<b>254</b>	<b>574</b>	254	574	16	254	574	<b>254</b>	<b>574</b>	254	574
445.gobmk	16	615	273	616	272	<b>616</b>	<b>273</b>	16	<b>601</b>	<b>279</b>	602	279	601	279
456.hammer	16	<b>331</b>	<b>451</b>	332	450	331	451	16	272	549	<b>273</b>	<b>547</b>	273	546
458.sjeng	16	738	262	<b>738</b>	<b>262</b>	725	267	16	691	280	<b>693</b>	<b>279</b>	709	273
462.libquantum	16	153	2160	154	2160	<b>154</b>	<b>2160</b>	16	153	2160	154	2160	<b>154</b>	<b>2160</b>
464.h264ref	16	783	452	<b>780</b>	<b>454</b>	771	459	16	781	454	757	468	<b>759</b>	<b>467</b>
471.omnetpp	16	<b>489</b>	<b>205</b>	489	205	488	205	16	454	220	455	220	<b>454</b>	<b>220</b>
473.astar	16	<b>509</b>	<b>221</b>	508	221	511	220	16	<b>509</b>	<b>221</b>	508	221	511	220
483.xalancbmk	16	269	410	271	408	<b>271</b>	<b>408</b>	16	269	410	271	408	<b>271</b>	<b>408</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Drive Write Cache set to Enabled in HP Array Configuration Utility, CLI version
Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write in HP Array Configuration Utility, CLI version
```

## Platform Notes

### BIOS Configuration:

```
HP Power Profile set to Custom
Energy/Performance Bias is set to Maximum Performance
Thermal Configuration set to Maximum Cooling
Collaborative Power Control set to Disabled
Processor Power and Utilization Monitoring set to Disabled
Sysinfo program /cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on DL360G8-1 Mon May 14 16:31:11 2012
Continued on next page
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(3.30 GHz, Intel Xeon E5-2643)

**SPECint\_rate2006 = 379**

**SPECint\_rate\_base2006 = 362**

**CPU2006 license:** 3

**Test date:** May-2012

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2012

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2643 0 @ 3.30GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 8
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132120000 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux DL360G8-1 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 14 16:26
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_rh62-lv_root
                  ext4   50G   19G   29G  39%  /
```

Additional information from dmidecode:

BIOS HP P71 02/25/2012

Memory:

16x Not Specified Not Specified 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(3.30 GHz, Intel Xeon E5-2643)

**SPECint\_rate2006 = 379**

**SPECint\_rate\_base2006 = 362**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Mar-2012

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/cpu2006/libss2/32:/cpu2006/libss2/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/spec/libss2/32 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(3.30 GHz, Intel Xeon E5-2643)

**SPECint\_rate2006 = 379**

**SPECint\_rate\_base2006 = 362**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** May-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Mar-2012

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll14 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL360p Gen8  
(3.30 GHz, Intel Xeon E5-2643)

**SPECint\_rate2006 = 379**

**SPECint\_rate\_base2006 = 362**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** May-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Mar-2012

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/spec/libss2/32 -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120605.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120605.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:21:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.