



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint[®]_rate2006 = 800

Express5800/R120e-2M (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 772

CPU2006 license: 9006


Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

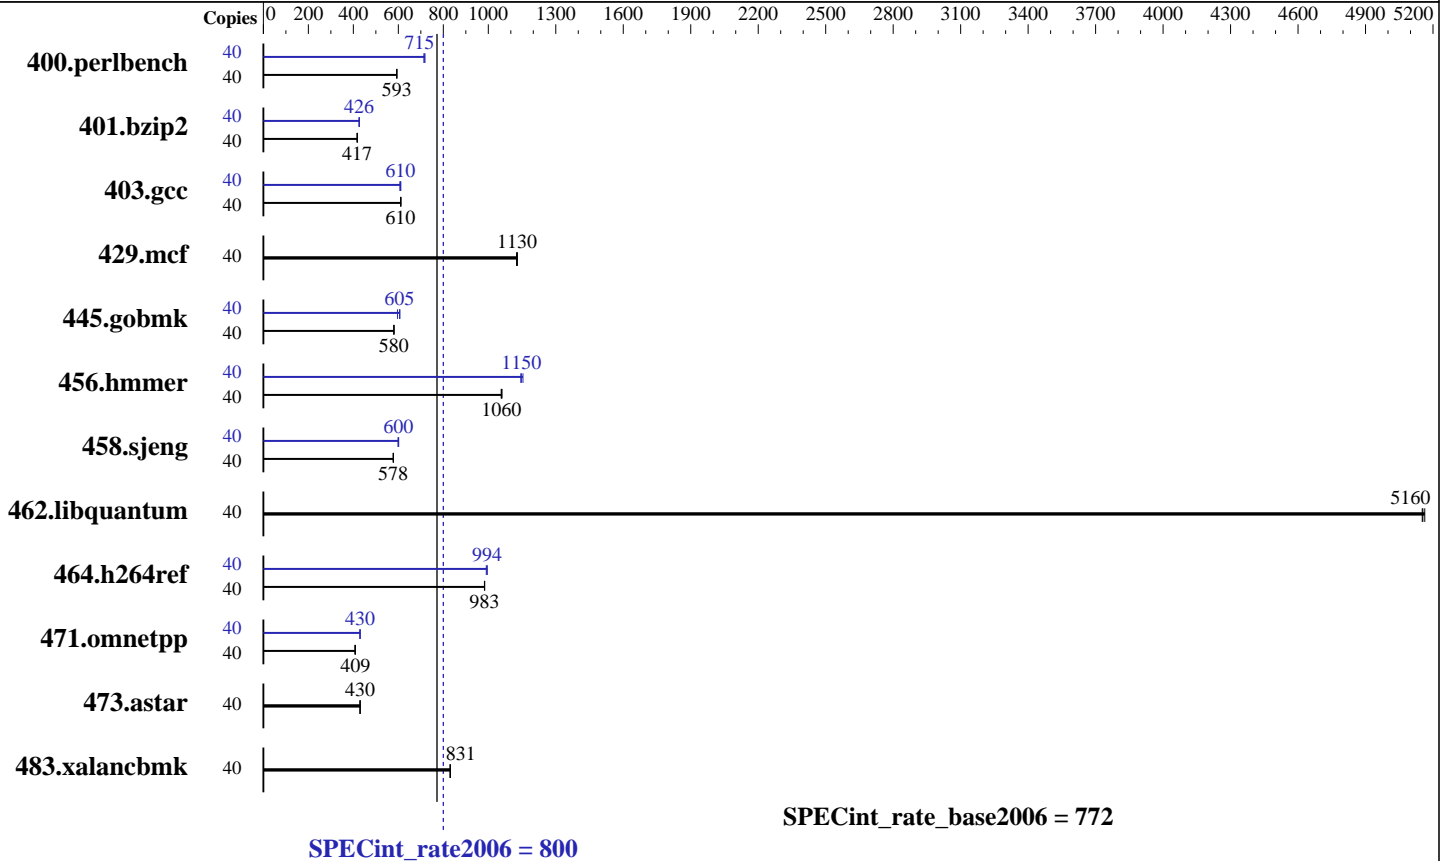

Hardware

CPU Name: Intel Xeon E5-2670 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.18.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = **800**

Express5800/R120e-2M (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 772

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	40	658	594	659	593	659	593	40	547	714	544	719	547	715		
401.bzip2	40	926	417	925	417	925	417	40	908	425	906	426	905	427		
403.gcc	40	528	610	528	610	526	612	40	527	611	528	610	531	607		
429.mcf	40	323	1130	324	1130	323	1130	40	323	1130	324	1130	323	1130		
445.gobmk	40	723	580	723	580	722	581	40	691	607	704	596	694	605		
456.hammer	40	353	1060	352	1060	353	1060	40	323	1150	325	1150	326	1140		
458.sjeng	40	839	577	838	578	837	578	40	806	600	805	602	809	599		
462.libquantum	40	161	5150	161	5160	161	5160	40	161	5150	161	5160	161	5160		
464.h264ref	40	900	984	901	983	900	983	40	890	994	893	991	890	995		
471.omnetpp	40	611	409	615	407	611	409	40	582	429	581	430	582	430		
473.astar	40	654	430	653	430	652	431	40	654	430	653	430	652	431		
483.xalancbmk	40	333	830	332	831	332	831	40	333	830	332	831	332	831		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
The Express5800/R120e-1M and
the Express5800/R120e-2M models are electronically equivalent.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 800

Express5800/R120e-2M (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 772

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

General Notes (Continued)

The results have been measured on the Express5800/R120e-1M model.

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 800

Express5800/R120e-2M (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 772

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 800

Express5800/R120e-2M (Intel Xeon E5-2670 v2)

SPECint_rate_base2006 = 772

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:07:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 November 2013.