



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint®\_rate2006 = 412**

Express5800/R120e-1M (Intel Xeon E5-2670 v2)

**SPECint\_rate\_base2006 = 398**

**CPU2006 license:** 9006


**Test date:** Oct-2013

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2013

**Tested by:** NEC Corporation

**Software Availability:** Sep-2013

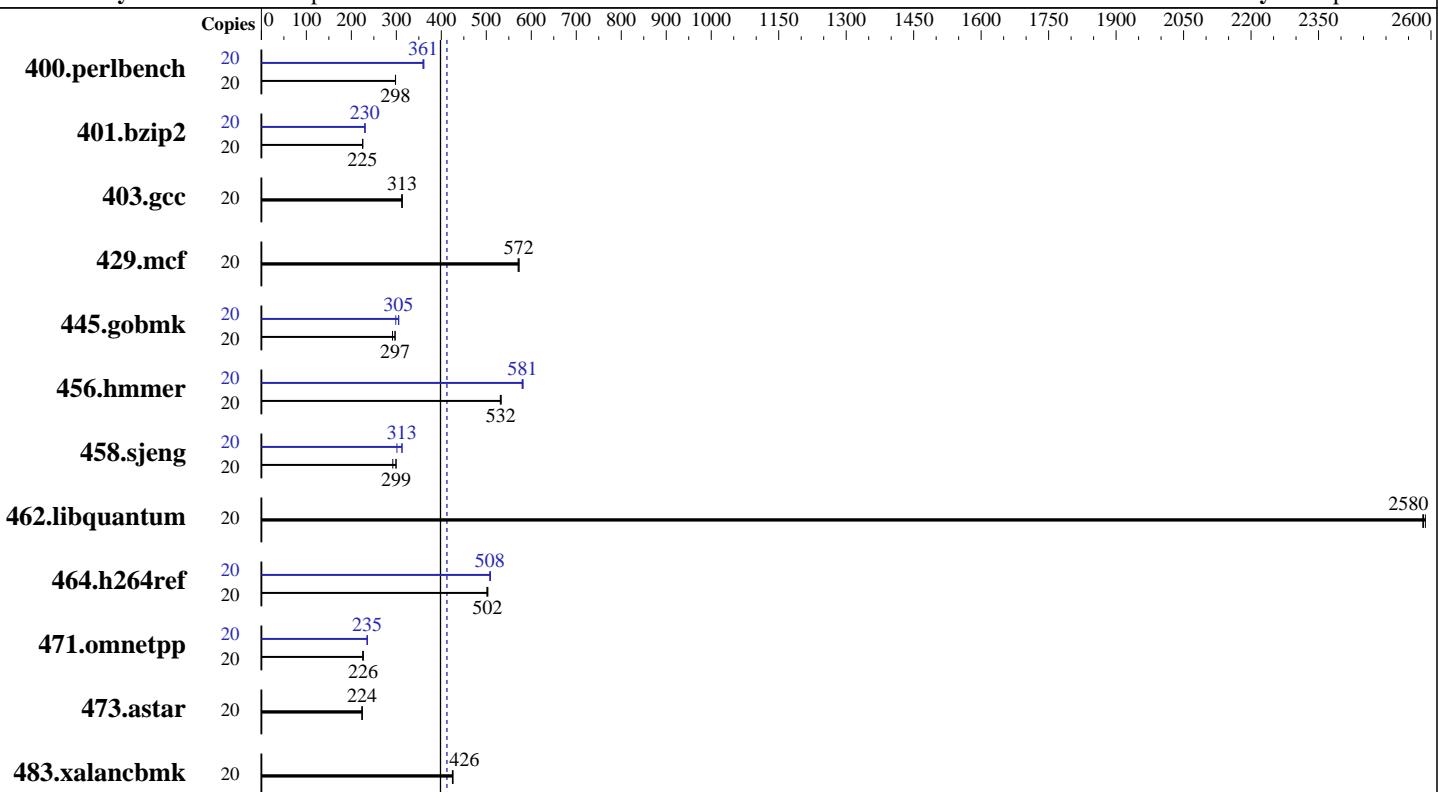

**SPECint\_rate\_base2006 = 398**

**SPECint\_rate2006 = 412**

## Hardware

CPU Name: Intel Xeon E5-2670 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 10 cores, 1 chip, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (4 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Compiler: Kernel 2.6.32-358.18.1.el6.x86\_64  
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120e-1M (Intel Xeon E5-2670 v2)

**SPECint\_rate2006 = 412**

**SPECint\_rate\_base2006 = 398**

**CPU2006 license:** 9006

**Test date:** Oct-2013

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2013

**Tested by:** NEC Corporation

**Software Availability:** Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	20	656	298	<b>655</b>	<b>298</b>	655	298	20	<b>541</b>	<b>361</b>	544	359	541	361
401.bzip2	20	<b>858</b>	<b>225</b>	856	226	859	225	20	838	230	839	230	<b>839</b>	<b>230</b>
403.gcc	20	514	313	<b>515</b>	<b>313</b>	516	312	20	514	313	<b>515</b>	<b>313</b>	516	312
429.mcf	20	<b>319</b>	<b>572</b>	318	573	320	571	20	<b>319</b>	<b>572</b>	318	573	320	571
445.gobmk	20	706	297	<b>706</b>	<b>297</b>	720	291	20	<b>688</b>	<b>305</b>	702	299	687	305
456.hammer	20	<b>351</b>	<b>532</b>	350	533	351	531	20	<b>321</b>	<b>581</b>	322	580	321	582
458.sjeng	20	<b>809</b>	<b>299</b>	809	299	828	292	20	803	301	774	313	<b>774</b>	<b>313</b>
462.libquantum	20	161	2580	<b>160</b>	<b>2580</b>	160	2590	20	161	2580	<b>160</b>	<b>2580</b>	160	2590
464.h264ref	20	883	501	879	504	<b>881</b>	<b>502</b>	20	<b>871</b>	<b>508</b>	869	509	871	508
471.omnetpp	20	552	226	<b>553</b>	<b>226</b>	555	225	20	531	235	531	235	<b>531</b>	<b>235</b>
473.astar	20	628	224	<b>627</b>	<b>224</b>	626	224	20	628	224	<b>627</b>	<b>224</b>	626	224
483.xalancbmk	20	324	426	325	425	<b>324</b>	<b>426</b>	20	324	426	325	425	<b>324</b>	<b>426</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

The Express5800/R120e-1M and

the Express5800/R120e-2M models are electronically equivalent.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120e-1M (Intel Xeon E5-2670 v2)

**SPECint\_rate2006 = 412**

**CPU2006 license:** 9006

**Test date:** Oct-2013

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2013

**Tested by:** NEC Corporation

**Software Availability:** Sep-2013

## General Notes (Continued)

The results have been measured on the Express5800/R120e-1M model.

## Base Compiler Invocation

C benchmarks:

  icc -m32

C++ benchmarks:

  icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

  -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

  icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120e-1M (Intel Xeon E5-2670 v2)

**SPECint\_rate2006 = 412**

**SPECint\_rate\_base2006 = 398**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

458.sjeng: `icc -m64`

C++ benchmarks:  
`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmr: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmr: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll14 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll12 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120e-1M (Intel Xeon E5-2670 v2)

**SPECint\_rate2006 = 412**

**SPECint\_rate\_base2006 = 398**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 17:25:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 November 2013.