



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint®_rate2006 = 404

Supermicro A+ Server 2022G-URF4+
(H8DGPU-LN4F+, AMD Opteron 6338P)

SPECint_rate_base2006 = 356

CPU2006 license: 001176


Test date: Dec-2013

Test sponsor: Supermicro

Hardware Availability: Jan-2014

Tested by: Supermicro

Software Availability: Aug-2012

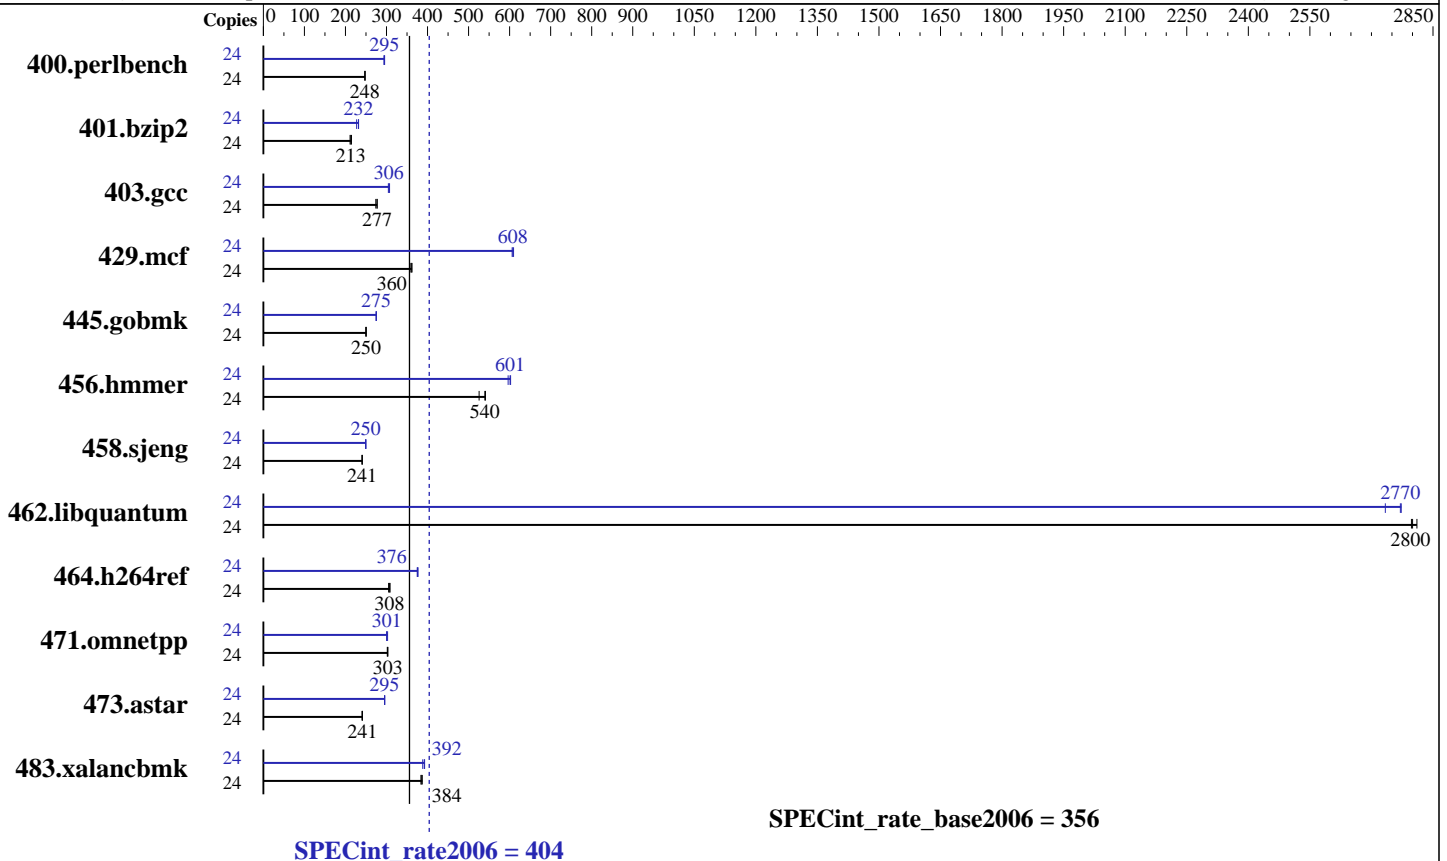

Hardware

CPU Name: AMD Opteron 6338P
 CPU Characteristics: AMD Turbo CORE technology up to 2.80 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 384 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATAIII, 7200 RPM
 Other Hardware: None

Software

Operating System: CentOS 6.4,
 Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite
 (from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF4+
(H8DGU-LN4F+, AMD Opteron 6338P)

SPECint_rate2006 = 404

SPECint_rate_base2006 = 356

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Aug-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	947	248	949	247	946	248	24	795	295	798	294	794	295
401.bzip2	24	1079	215	1087	213	1096	211	24	998	232	1019	227	1000	232
403.gcc	24	705	274	697	277	698	277	24	634	305	631	306	628	307
429.mcf	24	604	362	609	360	608	360	24	359	610	361	606	360	608
445.gobmk	24	1005	250	1009	250	1006	250	24	916	275	915	275	915	275
456.hammer	24	415	540	426	526	414	541	24	373	601	372	602	375	596
458.sjeng	24	1207	241	1207	241	1206	241	24	1164	250	1166	249	1163	250
462.libquantum	24	178	2800	177	2810	178	2800	24	182	2730	179	2770	179	2770
464.h264ref	24	1741	305	1727	308	1721	309	24	1417	375	1414	376	1409	377
471.omnetpp	24	495	303	495	303	497	302	24	499	301	499	300	496	303
473.astar	24	698	241	698	241	701	240	24	570	295	570	295	570	296
483.xalancbmk	24	428	387	431	384	431	384	24	422	393	426	388	422	392

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=21504 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/home/cpu2006/amd1206-rate-libs-revA/32:/home/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF4+
(H8DGU-LN4F+, AMD Opteron 6338P)

SPECint_rate2006 = 404

SPECint_rate_base2006 = 356

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Dec-2013
Hardware Availability: Jan-2014
Software Availability: Aug-2012

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF4+
(H8DGU-LN4F+, AMD Opteron 6338P)

SPECint_rate2006 = 404

SPECint_rate_base2006 = 356

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Aug-2012

Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bd=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 404

Supermicro A+ Server 2022G-URF4+
(H8DGPU-LN4F+, AMD Opteron 6338P)

SPECint_rate_base2006 = 356

CPU2006 license: 001176

Test date: Dec-2013

Test sponsor: Supermicro

Hardware Availability: Jan-2014

Tested by: Supermicro

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll_size=512 -OPT:unroll_times_max=16
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -LNO:pf2=0
-CG:local_sched_alg=1 -CG:p2align=0 -INLINE:aggressive=ON
-IPA:plimit=15000 -IPA:small_pu=100
-HP:bd=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bd=2m:heap=2m
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.html>
<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.xml>
<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 2022G-URF4+
(H8DGU-LN4F+, AMD Opteron 6338P)

SPECint_rate2006 = 404

SPECint_rate_base2006 = 356

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:48:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 March 2014.