



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®2006 = 44.6

Express5800/T110e-M (Intel Xeon E5-2403 v2)

SPECfp_base2006 = 43.8

CPU2006 license: 9006


Test date: Dec-2013

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

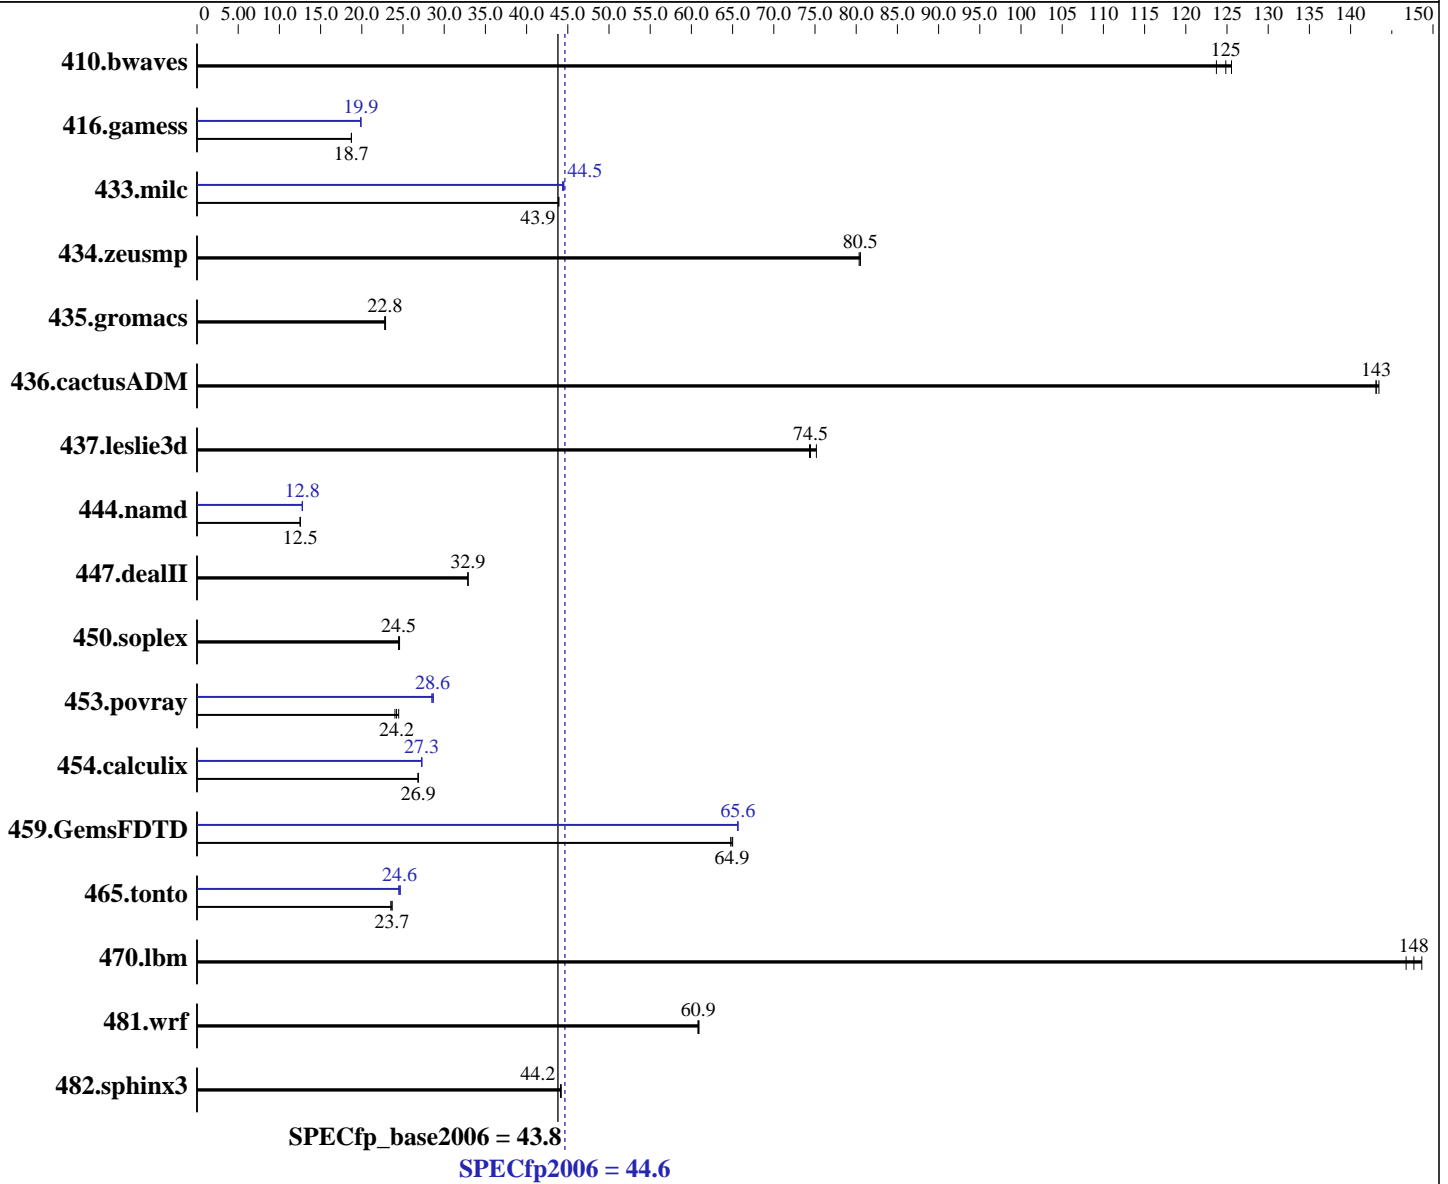

Hardware

CPU Name: Intel Xeon E5-2403 v2
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.2.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 44.6

Express5800/T110e-M (Intel Xeon E5-2403 v2)

SPECfp_base2006 = 43.8

CPU2006 license: 9006

Test date: Dec-2013

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (6 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	110	124	108	126	109	125	110	124	108	126	109	125
416.gamess	1044	18.7	1045	18.7	1045	18.7	985	19.9	985	19.9	985	19.9
433.milc	209	43.9	209	43.9	209	43.9	206	44.5	206	44.5	207	44.4
434.zeusmp	113	80.4	113	80.5	113	80.5	113	80.4	113	80.5	113	80.5
435.gromacs	313	22.8	313	22.8	312	22.9	313	22.8	313	22.8	312	22.9
436.cactusADM	83.3	143	83.5	143	83.5	143	83.3	143	83.5	143	83.5	143
437.leslie3d	125	75.2	126	74.3	126	74.5	125	75.2	126	74.3	126	74.5
444.namd	640	12.5	640	12.5	640	12.5	627	12.8	627	12.8	628	12.8
447.dealII	348	32.9	348	32.9	348	32.9	348	32.9	348	32.9	348	32.9
450.soplex	339	24.6	341	24.5	341	24.5	339	24.6	341	24.5	341	24.5
453.povray	220	24.2	217	24.5	221	24.0	186	28.6	185	28.7	187	28.5
454.calculix	307	26.9	308	26.8	307	26.9	302	27.3	302	27.3	303	27.3
459.GemsFDTD	163	65.0	163	64.9	164	64.8	162	65.6	162	65.6	162	65.6
465.tonto	418	23.5	416	23.7	416	23.7	399	24.7	402	24.5	400	24.6
470.lbm	93.6	147	92.4	149	93.0	148	93.6	147	92.4	149	93.0	148
481.wrf	184	60.9	183	60.9	184	60.8	184	60.9	183	60.9	184	60.8
482.sphinx3	442	44.1	441	44.2	441	44.2	442	44.1	441	44.2	441	44.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,compact,1,0"
 LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 44.6

Express5800/T110e-M (Intel Xeon E5-2403 v2)

SPECfp_base2006 = 43.8

CPU2006 license: 9006

Test date: Dec-2013

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

General Notes (Continued)

OMP_NUM_THREADS = "4"

Added glibc-static-2.12-1.107.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 44.6

Express5800/T110e-M (Intel Xeon E5-2403 v2)

SPECfp_base2006 = 43.8

CPU2006 license: 9006

Test date: Dec-2013

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 44.6

Express5800/T110e-M (Intel Xeon E5-2403 v2)

SPECfp_base2006 = 43.8

CPU2006 license: 9006

Test date: Dec-2013

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 44.6

Express5800/T110e-M (Intel Xeon E5-2403 v2)

SPECfp_base2006 = 43.8

CPU2006 license: 9006

Test date: Dec-2013

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:44:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 March 2014.