



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH621

**SPECint®\_rate2006 = 176**

**SPECint\_rate\_base2006 = 170**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

**Test date:** Mar-2014

**Hardware Availability:** May-2012

**Software Availability:** Nov-2013

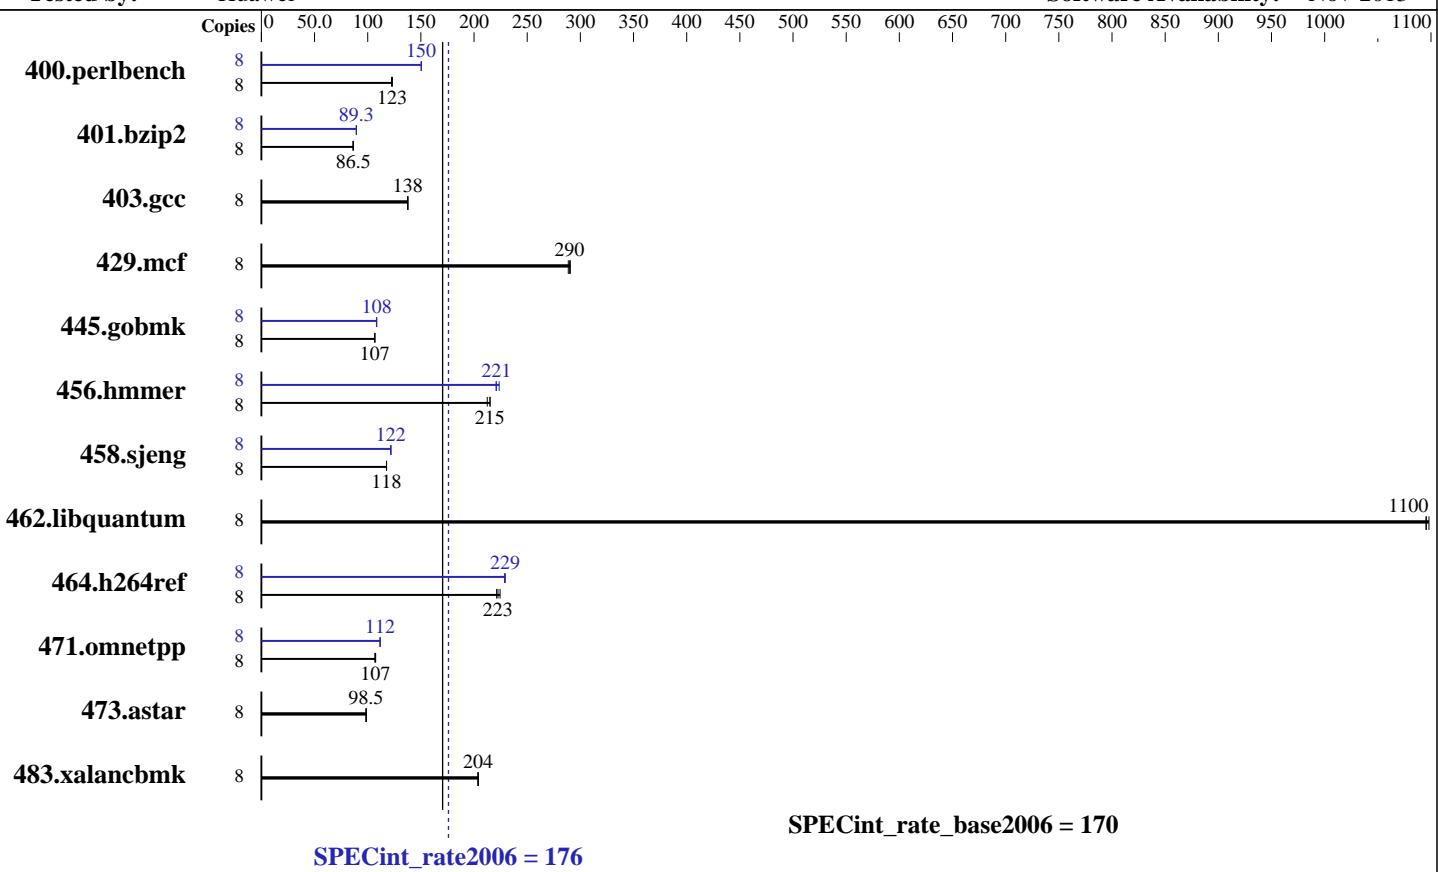

<b>Hardware</b>		<b>Software</b>	
CPU Name:	Intel Xeon E5-2403	Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
CPU Characteristics:		Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
CPU MHz:	1800	Auto Parallel:	No
FPU:	Integrated	File System:	ext4
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chip	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V10.0
L3 Cache:	10 MB I+D on chip per chip		
Other Cache:	None		
Memory:	96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC)		
Disk Subsystem:	1 x 300 GB SAS, 10K RPM		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei BH621

**SPECint\_rate2006 = 176**  
**SPECint\_rate\_base2006 = 170**

CPU2006 license: 3175

Test date: Mar-2014

Test sponsor: Huawei

Hardware Availability: May-2012

Tested by: Huawei

Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	638	122	<b>636</b>	<b>123</b>	635	123	8	520	150	520	150	<b>520</b>	<b>150</b>
401.bzip2	8	892	86.5	896	86.1	<b>893</b>	<b>86.5</b>	8	865	89.3	<b>865</b>	<b>89.3</b>	864	89.4
403.gcc	8	467	138	<b>468</b>	<b>138</b>	468	138	8	467	138	<b>468</b>	<b>138</b>	468	138
429.mcf	8	253	289	<b>252</b>	<b>290</b>	251	291	8	253	289	<b>252</b>	<b>290</b>	251	291
445.gobmk	8	<b>787</b>	<b>107</b>	787	107	786	107	8	774	108	<b>774</b>	<b>108</b>	775	108
456.hmmer	8	<b>347</b>	<b>215</b>	351	212	347	215	8	338	221	334	224	<b>338</b>	<b>221</b>
458.sjeng	8	<b>823</b>	<b>118</b>	823	118	822	118	8	<b>795</b>	<b>122</b>	795	122	795	122
462.libquantum	8	151	1100	<b>151</b>	<b>1100</b>	151	1100	8	151	1100	<b>151</b>	<b>1100</b>	151	1100
464.h264ref	8	800	221	<b>796</b>	<b>223</b>	789	224	8	<b>772</b>	<b>229</b>	774	229	772	229
471.omnetpp	8	465	107	<b>466</b>	<b>107</b>	469	107	8	448	112	<b>448</b>	<b>112</b>	448	112
473.astar	8	569	98.7	571	98.4	<b>570</b>	<b>98.5</b>	8	569	98.7	571	98.4	<b>570</b>	<b>98.5</b>
483.xalancbmk	8	<b>271</b>	<b>204</b>	271	204	270	204	8	<b>271</b>	<b>204</b>	271	204	270	204

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$
running on spec Fri Mar  7 22:15:38 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2403 0 @ 1.80GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings  : 4
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH621

SPECint\_rate2006 = 176

SPECint\_rate\_base2006 = 170

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2014

Hardware Availability: May-2012

Software Availability: Nov-2013

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB

From /proc/meminfo
  MemTotal:      99010156 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
  redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
  system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux spec 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
  x86_64 x86_64 GNU/Linux

run-level 3 Mar 7 17:45

SPEC is set to: /spec
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda1        ext4  289G   20G  255G   7%  /

Additional information from dmidecode:
  BIOS Insyde Corp. RMIBV372 12/21/2013
  Memory:
    12x Samsung M393B1K70QB0-YK0 8 GB 1066 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei  
Huawei BH621

SPECint\_rate2006 = 176

SPECint\_rate\_base2006 = 170

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Mar-2014  
Hardware Availability: May-2012  
Software Availability: Nov-2013

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmer: icc -m64  
458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH621

SPECint\_rate2006 = 176

SPECint\_rate\_base2006 = 170

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2014

Hardware Availability: May-2012

Software Availability: Nov-2013

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
  
403.gcc: basepeak = yes  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32  
  
462.libquantum: basepeak = yes  
  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap  
  
473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei BH621

SPECint\_rate2006 = 176

SPECint\_rate\_base2006 = 170

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2014

Hardware Availability: May-2012

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 22:22:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 6 May 2014.