



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M1, Intel Xeon E7-4890 v2, 2.80 GHz

SPECint<sup>®</sup>\_rate2006 = 1190

SPECint\_rate\_base2006 = 1150

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2014

Hardware Availability: Jun-2014

Software Availability: Sep-2013

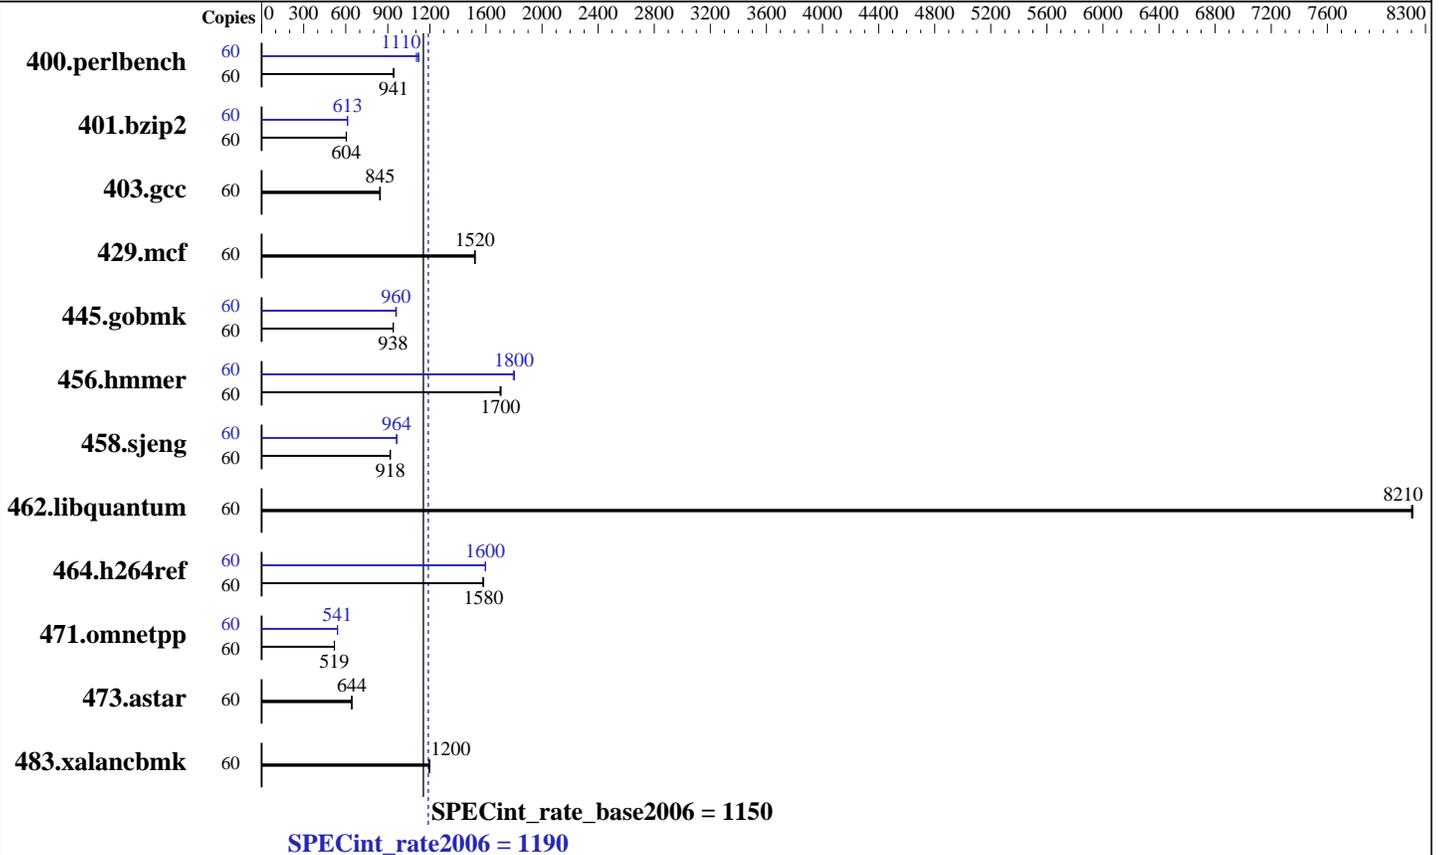

### Hardware

CPU Name: Intel Xeon E7-4890 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 30 cores, 2 chips, 15 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 37.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX4770 M1, Intel Xeon E7-4890 v2, 2.80 GHz

SPECint\_rate2006 = 1190

SPECint\_rate\_base2006 = 1150

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: May-2014  
Hardware Availability: Jun-2014  
Software Availability: Sep-2013

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	60	623	940	622	943	<u>623</u>	<u>941</u>	60	523	1120	<u>527</u>	<u>1110</u>	531	1100		
401.bzip2	60	960	603	957	605	<u>959</u>	<u>604</u>	60	945	613	<u>945</u>	<u>613</u>	946	612		
403.gcc	60	<u>572</u>	<u>845</u>	570	847	574	842	60	<u>572</u>	<u>845</u>	570	847	574	842		
429.mcf	60	<u>360</u>	<u>1520</u>	359	1520	360	1520	60	<u>360</u>	<u>1520</u>	359	1520	360	1520		
445.gobmk	60	670	939	<u>671</u>	<u>938</u>	671	938	60	<u>656</u>	<u>960</u>	655	961	658	957		
456.hammer	60	329	1700	328	1710	<u>328</u>	<u>1700</u>	60	312	1790	<u>311</u>	<u>1800</u>	310	1800		
458.sjeng	60	791	918	791	917	<u>791</u>	<u>918</u>	60	<u>753</u>	<u>964</u>	754	963	753	964		
462.libquantum	60	152	8200	<u>151</u>	<u>8210</u>	151	8210	60	152	8200	<u>151</u>	<u>8210</u>	151	8210		
464.h264ref	60	842	1580	<u>839</u>	<u>1580</u>	838	1580	60	832	1600	831	1600	<u>832</u>	<u>1600</u>		
471.omnetpp	60	723	519	721	520	<u>722</u>	<u>519</u>	60	693	541	<u>693</u>	<u>541</u>	693	541		
473.astar	60	656	642	654	644	<u>654</u>	<u>644</u>	60	656	642	654	644	<u>654</u>	<u>644</u>		
483.xalancbmk	60	345	1200	347	1190	<u>346</u>	<u>1200</u>	60	345	1200	347	1190	<u>346</u>	<u>1200</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006-MONITOR/libs/32:/SPECcpu2006-MONITOR/libs/64:/SPECcpu2006-MONITOR/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX4770 M1, Intel Xeon E7-4890 v2, 2.80 GHz

**SPECint\_rate2006 = 1190**

**SPECint\_rate\_base2006 = 1150**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Sep-2013

## General Notes (Continued)

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmer: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX4770 M1, Intel Xeon E7-4890 v2, 2.80 GHz

**SPECint\_rate2006 = 1190**

**SPECint\_rate\_base2006 = 1150**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX4770 M1, Intel Xeon E7-4890 v2, 2.80 GHz

**SPECint\_rate2006 = 1190**

**SPECint\_rate\_base2006 = 1150**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:41:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 June 2014.