



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 46.2

Huawei RH5885H V3 (Intel Xeon E7-4850 v2)

SPECint_base2006 = 43.9

CPU2006 license: 3175


Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Jun-2014

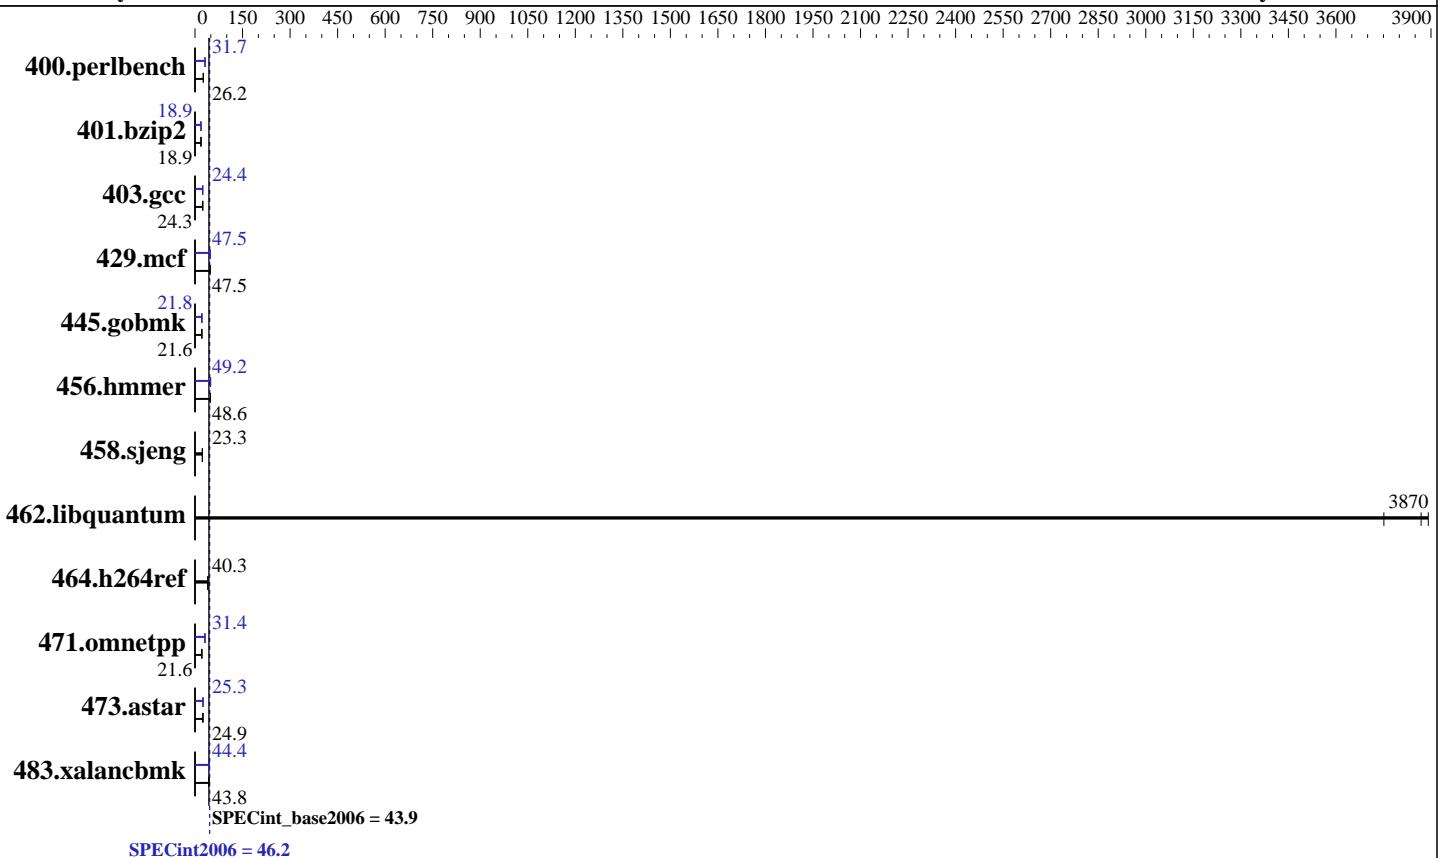

Hardware		Software
CPU Name:	Intel Xeon E7-4850 v2	Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz	Compiler: 3.10.0-123.el7.x86_64
CPU MHz:	2300	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
FPU:	Integrated	Auto Parallel: Yes
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip	File System: ext4
CPU(s) orderable:	2,4 chips	System State: Run level 3 (multi-user)
Primary Cache:	32 KB I + 32 KB D on chip per core	Base Pointers: 32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Peak Pointers: 32/64-bit
L3 Cache:	24 MB I+D on chip per chip	Other Software: Microquill SmartHeap V10.0
Other Cache:	None	
Memory:	1 TB (64 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)	
Disk Subsystem:	2 x 300 GB SAS, 10K RPM	
Other Hardware:	None	



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H V3 (Intel Xeon E7-4850 v2)

SPECint2006 = 46.2

SPECint_base2006 = 43.9

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Jun-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	371	26.3	372	26.2	374	26.1	309	31.6	308	31.7	308	31.7
401.bzip2	510	18.9	511	18.9	510	18.9	511	18.9	511	18.9	511	18.9
403.gcc	331	24.3	331	24.3	330	24.4	330	24.4	330	24.4	330	24.4
429.mcf	192	47.5	191	47.7	192	47.4	192	47.5	191	47.7	192	47.4
445.gobmk	485	21.6	485	21.6	485	21.6	482	21.8	482	21.8	482	21.8
456.hmmer	192	48.6	192	48.5	192	48.6	190	49.2	190	49.2	190	49.2
458.sjeng	520	23.3	519	23.3	520	23.3	520	23.3	519	23.3	520	23.3
462.libquantum	5.36	3870	5.52	3750	5.32	3890	5.36	3870	5.52	3750	5.32	3890
464.h264ref	549	40.3	550	40.2	548	40.4	549	40.3	550	40.2	548	40.4
471.omnetpp	289	21.6	289	21.7	289	21.6	198	31.5	200	31.3	199	31.4
473.astar	279	25.1	283	24.8	282	24.9	277	25.3	276	25.4	278	25.3
483.xalancbmk	157	43.9	158	43.8	158	43.6	155	44.4	155	44.4	154	44.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Set Intel Hyper Threading to disabled

Sysinfo program /spec/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Sat Oct 18 07:18:56 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-4850 v2 @ 2.30GHz

4 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 46.2

Huawei RH5885H V3 (Intel Xeon E7-4850 v2)

SPECint_base2006 = 43.9

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Jun-2014

Platform Notes (Continued)

```
caution.)  
    cpu cores : 12  
    siblings  : 12  
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13  
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13  
    physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13  
    physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13  
    cache size : 24576 kB  
  
From /proc/meminfo  
MemTotal:      1056475676 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.0 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="7.0"  
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"  
  ANSI_COLOR="0;31"  
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server  
  
uname -a:  
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57  
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Oct 18 07:18
```

```
SPEC is set to: /spec  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda3       ext4   349G   12G  320G   4% /  
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV395 07/25/2014

Memory:

61x Hynix HMT42GR7AFR4C-PB 16 GB 2 rank 1600 MHz, configured at 1066 MHz
3x Hynix HMT42GR7MFR4C-PB 16 GB 2 rank 1600 MHz, configured at 1066 MHz
32x NO DIMM NO DIMM

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H V3 (Intel Xeon E7-4850 v2)

SPECint2006 = 46.2

SPECint_base2006 = 43.9

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Jun-2014

Platform Notes (Continued)

memory is 1 TB and the dmidecode description should have two lines reading as:
 61x Hynix HMT42GR7AFR4C-PB 16 GB 2 rank 1600 MHz, configured at 1066 MHz
 3x Hynix HMT42GR7MFR4C-PB 16 GB 2 rank 1600 MHz, configured at 1066 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

OMP_NUM_THREADS = "48"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -DSPEC_CPU_LP64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xsse4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H V3 (Intel Xeon E7-4850 v2)

SPECint2006 = 46.2

SPECint_base2006 = 43.9

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Jun-2014

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

```
445.gobmk: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

C++ benchmarks (except as noted below):

```
icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

```
473.astar: icpc -m64
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
456.hmmer: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
473.astar: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H V3 (Intel Xeon E7-4850 v2)

SPECint2006 = 46.2

SPECint_base2006 = 43.9

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Oct-2014

Hardware Availability: Feb-2014

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
 -auto-p32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
 -ansi-alias

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-ra-region-strategy=block -ansi-alias
 -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
 -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 46.2

Huawei RH5885H V3 (Intel Xeon E7-4850 v2)

SPECint_base2006 = 43.9

CPU2006 license: 3175

Test date: Oct-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Jun-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 16 13:10:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 December 2014.