



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 38.2

Huawei CH242 V3 (Intel Xeon E7-4809 v3)

SPECint_base2006 = 36.6

CPU2006 license: 3175


Test date: Jun-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

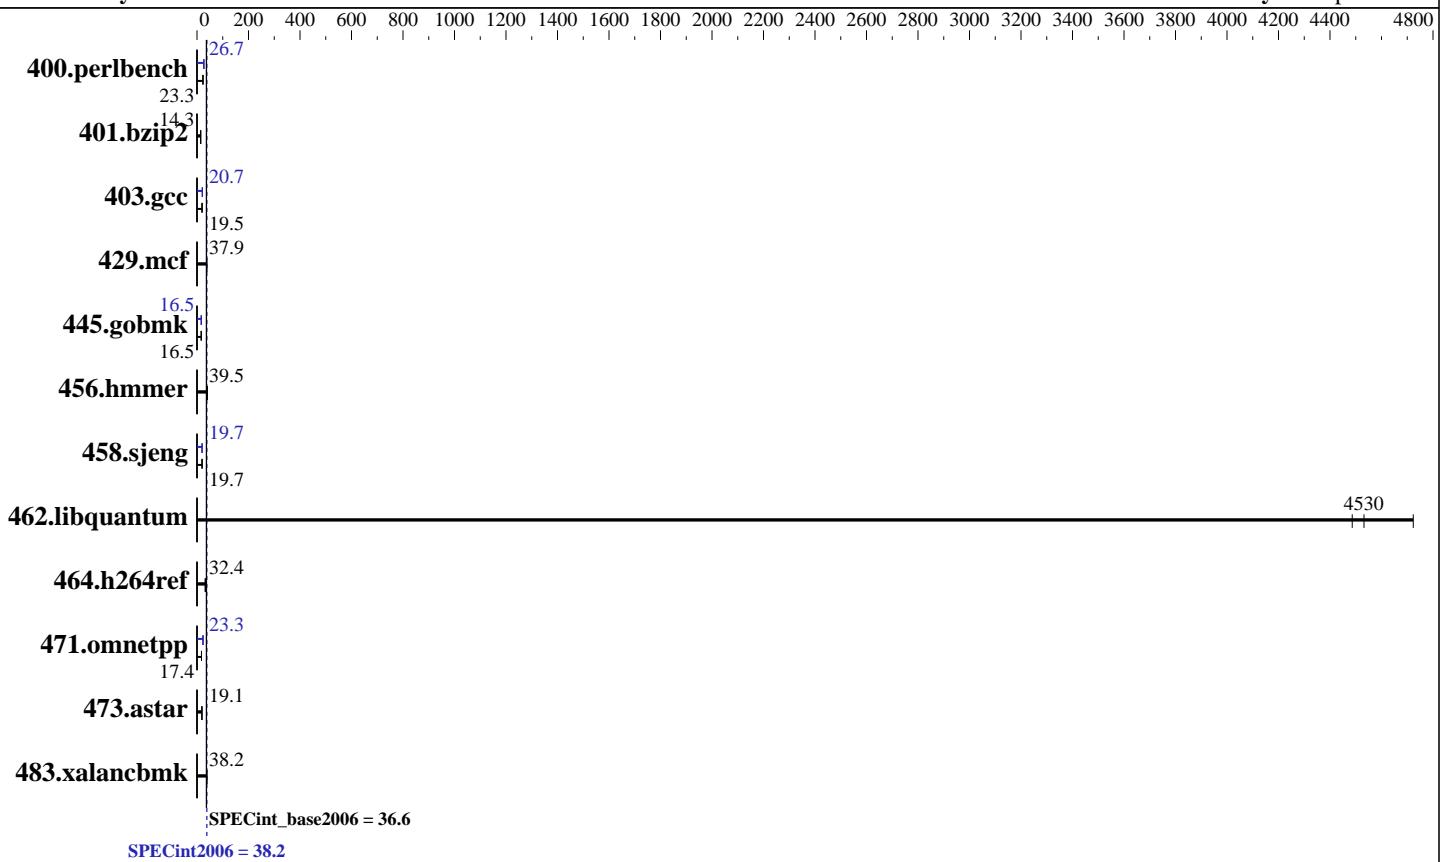

Hardware

| | |
|----------------------|---|
| CPU Name: | Intel Xeon E7-4809 v3 |
| CPU Characteristics: | |
| CPU MHz: | 2000 |
| FPU: | Integrated |
| CPU(s) enabled: | 32 cores, 4 chips, 8 cores/chip |
| CPU(s) orderable: | 2,4 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 20 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz) |
| Disk Subsystem: | 1 x 500 GB SATA, 7200 RPM |
| Other Hardware: | None |

Software

| | |
|-------------------|--|
| Operating System: | Red Hat Enterprise Linux Server release 7.0 (Maipo) 3.10.0-123.el7.x86_64 |
| Compiler: | C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux |
| Auto Parallel: | Yes |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.0 |



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 38.2

Huawei CH242 V3 (Intel Xeon E7-4809 v3)

SPECint_base2006 = 36.6

CPU2006 license: 3175

Test date: Jun-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|------------|-------------|------------|-------------|-------------|-------------|------------|-------------|------------|-------------|-------------|-------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 417 | 23.4 | 422 | 23.1 | 420 | 23.3 | 368 | 26.5 | 366 | 26.7 | 366 | 26.7 |
| 401.bzip2 | 676 | 14.3 | 676 | 14.3 | 675 | 14.3 | 676 | 14.3 | 676 | 14.3 | 675 | 14.3 |
| 403.gcc | 412 | 19.5 | 411 | 19.6 | 412 | 19.5 | 391 | 20.6 | 390 | 20.7 | 386 | 20.8 |
| 429.mcf | 238 | 38.2 | 246 | 37.1 | 241 | 37.9 | 238 | 38.2 | 246 | 37.1 | 241 | 37.9 |
| 445.gobmk | 636 | 16.5 | 637 | 16.5 | 637 | 16.5 | 634 | 16.5 | 634 | 16.5 | 635 | 16.5 |
| 456.hammer | 236 | 39.5 | 236 | 39.5 | 236 | 39.5 | 236 | 39.5 | 236 | 39.5 | 236 | 39.5 |
| 458.sjeng | 615 | 19.7 | 615 | 19.7 | 615 | 19.7 | 613 | 19.7 | 614 | 19.7 | 613 | 19.7 |
| 462.libquantum | 4.39 | 4720 | 4.62 | 4490 | 4.57 | 4530 | 4.39 | 4720 | 4.62 | 4490 | 4.57 | 4530 |
| 464.h264ref | 684 | 32.4 | 687 | 32.2 | 684 | 32.4 | 684 | 32.4 | 687 | 32.2 | 684 | 32.4 |
| 471.omnetpp | 357 | 17.5 | 360 | 17.4 | 359 | 17.4 | 268 | 23.3 | 268 | 23.3 | 268 | 23.4 |
| 473.astar | 370 | 19.0 | 368 | 19.1 | 367 | 19.1 | 370 | 19.0 | 368 | 19.1 | 367 | 19.1 |
| 483.xalancbmk | 180 | 38.2 | 183 | 37.7 | 180 | 38.3 | 180 | 38.2 | 183 | 37.7 | 180 | 38.3 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Set Hyper-Threading to Disabled

Set Lock_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Mon Jun 8 06:33:26 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-4809 v3 @ 2.00GHz

4 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 38.2

Huawei CH242 V3 (Intel Xeon E7-4809 v3)

SPECint_base2006 = 36.6

CPU2006 license: 3175

Test date: Jun-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

Platform Notes (Continued)

```
caution.)  
    cpu cores : 8  
    siblings   : 8  
    physical 0: cores 0 1 2 3 4 5 6 7  
    physical 1: cores 0 1 2 3 4 5 6 7  
    physical 2: cores 0 1 2 3 4 5 6 7  
    physical 3: cores 0 1 2 3 4 5 6 7  
    cache size : 20480 KB  
  
From /proc/meminfo  
MemTotal:      528026640 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.0 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="7.0"  
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"  
  ANSI_COLOR="0;31"  
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server  
  
uname -a:  
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57  
EDT 2014 x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Jun 8 05:52  
  
SPEC is set to: /spec  
Filesystem      Type  Size  Used Avail Use% Mounted on  
 /dev/sda2       xfs   440G  204G  236G  47% /  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS American Megatrends Inc. BLISV610 05/23/2015  
Memory:  
 32x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1333 MHz  
  
(End of data from sysinfo program)
```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

| | | |
|---|-------------------------------|-------------|
| Huawei | SPECint2006 = | 38.2 |
| Huawei CH242 V3 (Intel Xeon E7-4809 v3) | SPECint_base2006 = | 36.6 |
| CPU2006 license: 3175 | Test date: | Jun-2015 |
| Test sponsor: Huawei | Hardware Availability: | May-2015 |
| Tested by: Huawei | Software Availability: | Sep-2014 |

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
OMP_NUM_THREADS = "32"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 38.2

Huawei CH242 V3 (Intel Xeon E7-4809 v3)

SPECint_base2006 = 36.6

CPU2006 license: 3175

Test date: Jun-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: basepeak = yes

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

| | | |
|---|-------------------------------|-------------|
| Huawei | SPECint2006 = | 38.2 |
| Huawei CH242 V3 (Intel Xeon E7-4809 v3) | SPECint_base2006 = | 36.6 |
| CPU2006 license: 3175 | Test date: | Jun-2015 |
| Test sponsor: Huawei | Hardware Availability: | May-2015 |
| Tested by: Huawei | Software Availability: | Sep-2014 |

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmr: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh -lsmartheap
-ansi-alias

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.4.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 38.2

Huawei CH242 V3 (Intel Xeon E7-4809 v3)

SPECint_base2006 = 36.6

CPU2006 license: 3175

Test date: Jun-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 14 16:21:29 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 July 2015.