



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6 (Intel Xeon E7-8867 v3,
2.50 GHz)

SPECfp®_rate2006 = 1940

SPECfp_rate_base2006 = 1890

CPU2006 license: 9017


Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

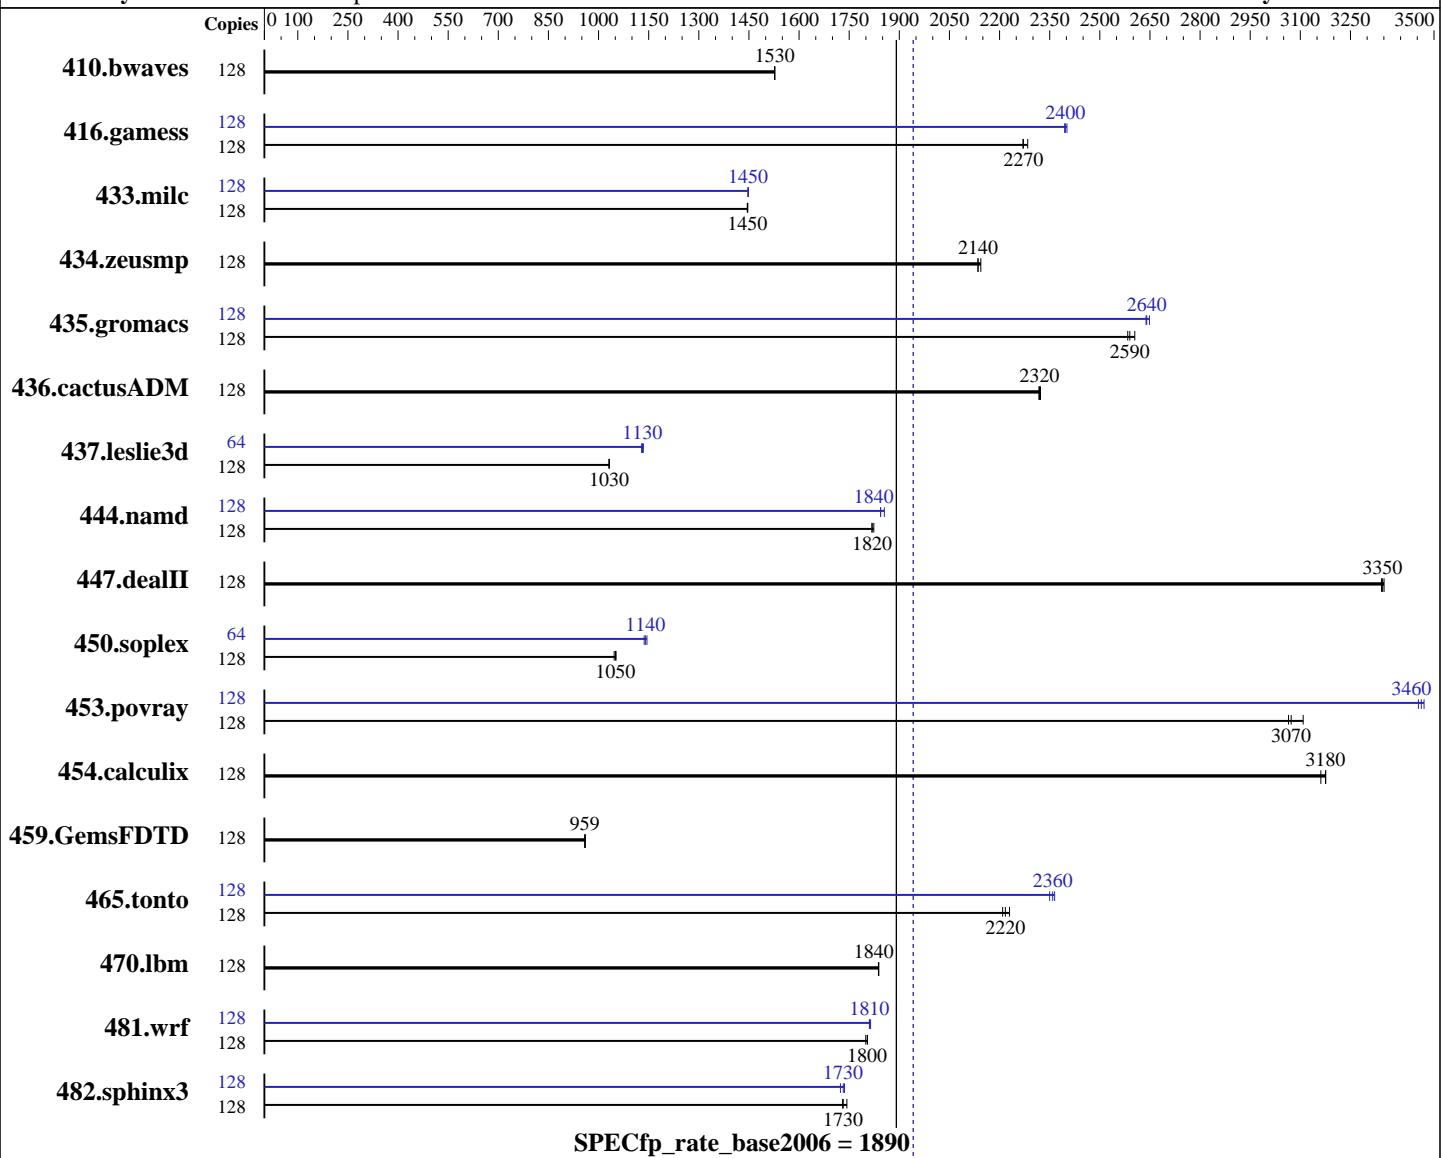

SPECfp_rate_base2006 = 1890

SPECfp_rate2006 = 1940

Hardware

CPU Name: Intel Xeon E7-8867 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6 (Intel Xeon E7-8867 v3,
2.50 GHz)

SPECfp_rate2006 = 1940

SPECfp_rate_base2006 = 1890

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1 x 400 GB SSD
Other Hardware:	None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1139	1530	1139	1530	1139	1530	128	1139	1530	1139	1530	1139	1530		
416.gamess	128	1103	2270	1104	2270	1097	2280	128	1046	2400	1044	2400	1047	2390		
433.milc	128	813	1440	813	1450	812	1450	128	811	1450	811	1450	812	1450		
434.zeusmp	128	545	2140	543	2140	545	2140	128	545	2140	543	2140	545	2140		
435.gromacs	128	351	2600	353	2590	354	2580	128	345	2650	346	2640	346	2640		
436.cactusADM	128	659	2320	659	2320	660	2320	128	659	2320	659	2320	660	2320		
437.leslie3d	128	1166	1030	1167	1030	1166	1030	64	530	1130	532	1130	533	1130		
444.namd	128	564	1820	563	1820	565	1820	128	553	1860	557	1840	557	1840		
447.dealII	128	438	3340	437	3350	438	3350	128	438	3340	437	3350	438	3350		
450.soplex	128	1014	1050	1020	1050	1016	1050	64	468	1140	470	1140	466	1140		
453.povray	128	222	3060	222	3070	219	3110	128	197	3450	196	3470	197	3460		
454.calculix	128	334	3160	332	3180	333	3180	128	334	3160	332	3180	333	3180		
459.GemsFDTD	128	1416	959	1417	959	1414	960	128	1416	959	1417	959	1414	960		
465.tonto	128	570	2210	568	2220	565	2230	128	534	2360	533	2360	536	2350		
470.lbm	128	957	1840	957	1840	957	1840	128	957	1840	957	1840	957	1840		
481.wrf	128	795	1800	792	1800	793	1800	128	788	1810	790	1810	789	1810		
482.sphinx3	128	1442	1730	1440	1730	1431	1740	128	1447	1720	1437	1740	1440	1730		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6 (Intel Xeon E7-8867 v3,
2.50 GHz)

SPECfp_rate2006 = 1940

SPECfp_rate_base2006 = 1890

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Platform Notes

Operating Mode set to Custom in BIOS

Cstates disabled in BIOS

Sysinfo program /home/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-w3yn Thu Jun 25 03:01:26 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-8867 v3 @ 2.50GHz
        4 "physical id"s (chips)
        128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 16
        siblings : 32
        physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 20 24 25 27
        physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 20 24 25 27
        physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 20 24 25 27
        physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 20 24 25 27
    cache size : 46080 KB
```

```
From /proc/meminfo
    MemTotal:       1058524636 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-w3yn 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6 (Intel Xeon E7-8867 v3,
2.50 GHz)

SPECfp_rate2006 = 1940

SPECfp_rate_base2006 = 1890

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Platform Notes (Continued)

(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Jun 24 14:10

SPEC is set to: /home/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	331G	303G	28G	92%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[A9E121SUS-1.00]- 03/13/2015

Memory:

64x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1600 MHz
32x NO DIMM Unknown

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6 (Intel Xeon E7-8867 v3,
2.50 GHz)

SPECfp_rate2006 = 1940

SPECfp_rate_base2006 = 1890

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6 (Intel Xeon E7-8867 v3,
2.50 GHz)

SPECfp_rate2006 = 1940

SPECfp_rate_base2006 = 1890

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll12

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6 (Intel Xeon E7-8867 v3,
2.50 GHz)

SPECfp_rate2006 = 1940

SPECfp_rate_base2006 = 1890

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-CC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-CC.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3950 X6 (Intel Xeon E7-8867 v3,
2.50 GHz)

SPECfp_rate2006 = 1940

SPECfp_rate_base2006 = 1890

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Oct 20 13:18:34 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 October 2015.