SPEC® CFP2006 Result

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Z97M-PLUS Motherboard (Intel Core i7-5775C)

SPECfp®2006 = 88.8

SPECfp_base2006 = 87.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2015
Hardware Availability: Jun-2015
Software Availability: Aug-2015

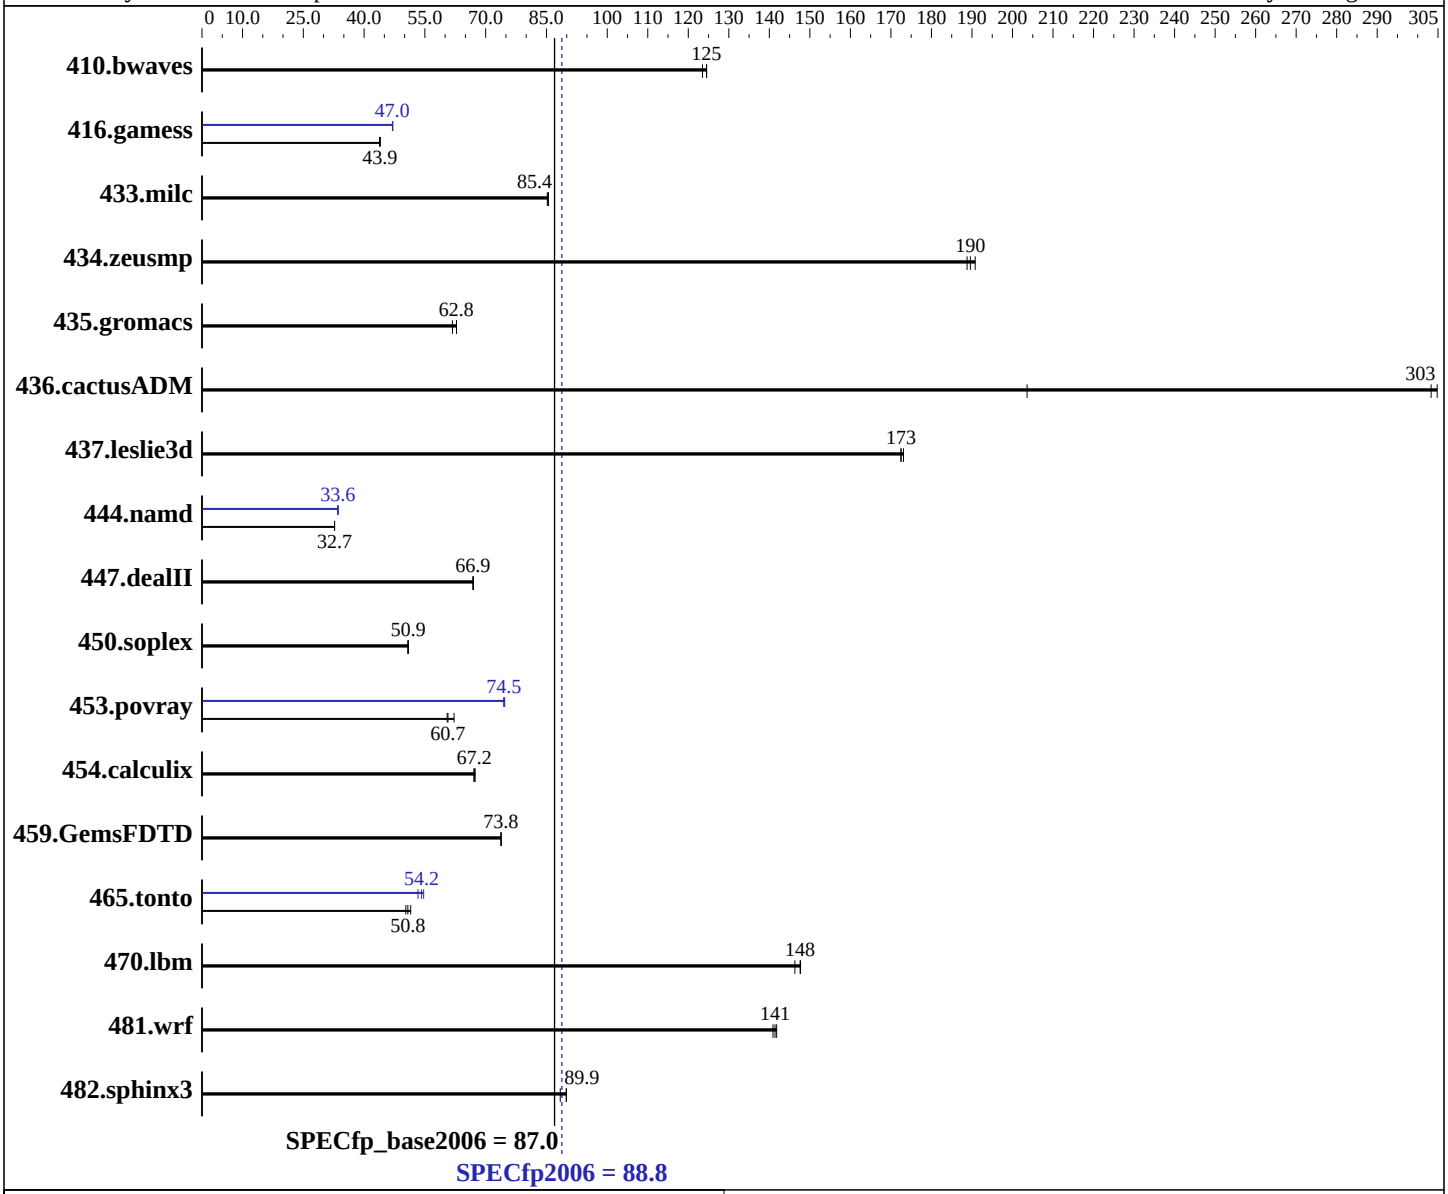

Hardware

CPU Name:	Intel Core i7-5775C
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Microsoft Windows 10 Pro 10.0.10240 N/A Build 10240
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Fortran: Version 16.0.0.110 of Intel Fortran Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	Yes

Continued on next page

SPEC CFP2006 Result

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

ASUS Z97M-PLUS Motherboard (Intel Core i7-5775C)

SPECfp2006 = 88.8

SPECfp_base2006 = 87.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2015
Hardware Availability: Jun-2015
Software Availability: Aug-2015

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-14900U-10, running at 1600MHz)
Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: SmartHeap Library Version 11.0 from http://www.microquill.com/

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	110	124	**109**	**125**	109	125	110	124	**109**	**125**	109	125
416.gamess	447	43.8	445	44.0	**446**	**43.9**	415	47.1	**416**	**47.0**	417	47.0
433.milc	107	85.5	108	85.2	**108**	**85.4**	107	85.5	108	85.2	**108**	**85.4**
434.zeusmp	48.2	189	**48.0**	**190**	47.7	191	48.2	189	**48.0**	**190**	47.7	191
435.gromacs	114	62.8	**114**	**62.8**	116	61.8	114	62.8	**114**	**62.8**	116	61.8
436.cactusADM	39.2	305	58.7	204	**39.4**	**303**	39.2	305	58.7	204	**39.4**	**303**
437.leslie3d	**54.5**	**173**	54.5	173	54.3	173	**54.5**	**173**	54.5	173	54.3	173
444.namd	245	32.7	245	32.7	**245**	**32.7**	**239**	**33.6**	239	33.6	239	33.5
447.dealII	171	66.9	**171**	**66.9**	171	66.9	171	66.9	**171**	**66.9**	171	66.9
450.soplex	**164**	**50.9**	164	50.9	164	50.8	**164**	**50.9**	164	50.9	164	50.8
453.povray	85.5	62.2	**87.6**	**60.7**	88.0	60.5	**71.4**	**74.5**	71.4	74.5	71.2	74.7
454.calculix	**123**	**67.2**	123	67.1	122	67.4	**123**	**67.2**	123	67.1	122	67.4
459.GemsFDTD	144	73.8	**144**	**73.8**	144	73.8	144	73.8	**144**	**73.8**	144	73.8
465.tonto	**194**	**50.8**	196	50.3	191	51.5	180	54.7	**181**	**54.2**	185	53.3
470.lbm	93.9	146	93.0	148	**93.1**	**148**	93.9	146	93.0	148	**93.1**	**148**
481.wrf	79.3	141	78.8	142	**79.0**	**141**	79.3	141	78.8	142	**79.0**	**141**
482.sphinx3	217	89.9	**217**	**89.9**	220	88.4	217	89.9	**217**	**89.9**	220	88.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 64-bit binaries with the command:
"psxevars.bat intel64" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on DESKTOP-K1NMJC0 Tue Oct 13 18:48:43 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    Trying 'systeminfo'
    OS Name       : Microsoft Windows 10 Pro
    OS Version    : 10.0.10240 N/A Build 10240
    System Manufacturer: ASUS
    System Model  : All Series
    Processor(s)  : 1 Processor(s) Installed.
         [01]: Intel64 Family 6 Model 71 Stepping 1 GenuineIntel ~3300 Mhz
    BIOS Version  : American Megatrends Inc. 2802, 5/19/2015
    Total Physical Memory: 8,063 MB

    Trying 'wmic cpu get /value'
    DeviceID      : CPU0
    L2CacheSize   : 1024
    L3CacheSize   : 6144
    MaxClockSpeed : 3301
    Name          : Intel(R) Core(TM) i7-5775C CPU @ 3.30GHz
    NumberOfCores : 4
    NumberOfLogicalProcessors: 8

    (End of data from sysinfo program)
```

Component Notes

```
    Tested systems can be used with Shin-G ATX case,
    PC Power and Cooling 1200W power supply
```

General Notes

```
  450.soplex (base): "getline_test" src.alt was used.

  447.dealII (base): "max_prototype" src.alt was used.
  447.dealII (base): "cxx11_make_pair" src.alt was used.

  450.soplex (base): "getline_test" src.alt was used.

  447.dealII (base): "max_prototype" src.alt was used.
  447.dealII (base): "cxx11_make_pair" src.alt was used.

   OMP_NUM_THREADS set to number of processors cores
   KMP_AFFINITY set to granularity=fine,scatter
   Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
   + 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG -DSPEC_CPU_BOOST_CONFIG_MSC_VER -DSPEC_NEED_ALGORITHM
450.soplex: -DSPEC_CPU_P64 -DSPEC_GETLINE_TEST
453.povray: -DSPEC_CPU_P64
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch /F1000000000

C++ benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch -Qcxx-features /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch /F1000000000

Continued on next page

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc12 -Qstd=c99

C++ benchmarks:
icl -Qvc12

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc12 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

453.povray: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxCORE-AVX2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 1 17:42:28 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 December 2015.