



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 58.8

PowerEdge R830 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint_base2006 = 56.8

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

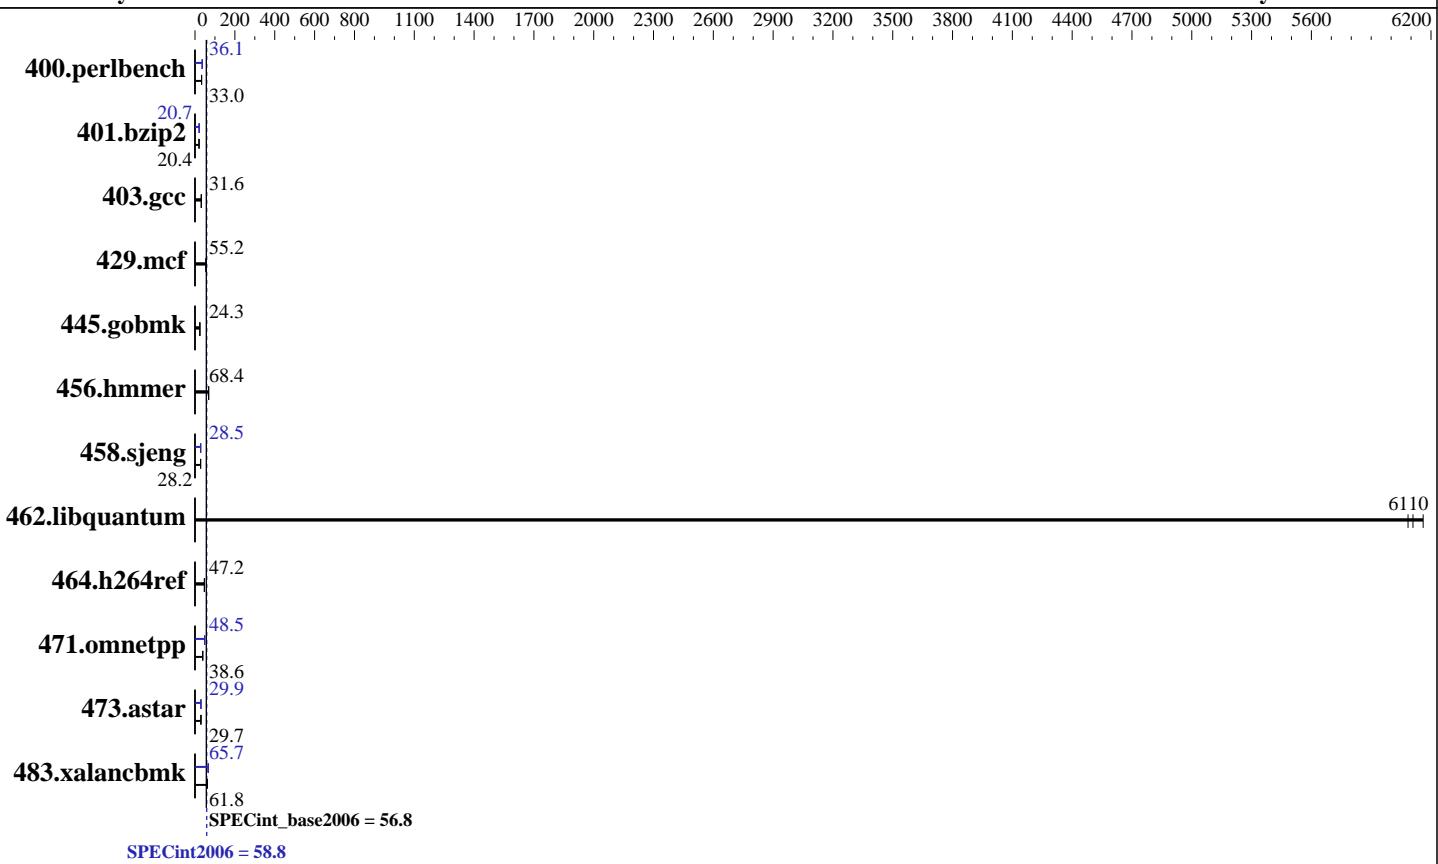

Hardware		Software	
CPU Name:	Intel Xeon E5-4650 v4	Operating System:	SUSE Linux Enterprise Server 12 SP1
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz	Compiler:	3.12.49-11-default
CPU MHz:	2200	Auto Parallel:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
FPU:	Integrated	File System:	btrfs
CPU(s) enabled:	56 cores, 4 chips, 14 cores/chip, 2 threads/core	System State:	Run level 3 (multi-user)
CPU(s) orderable:	2,4 chip	Base Pointers:	32/64-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V10.2
L3 Cache:	35 MB I+D on chip per chip		
Other Cache:	None		
Memory:	512 GB (32 x 16 GB 2Rx8 PC4-2400T-R)		
Disk Subsystem:	1 x 800 GB SATA SSD		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge R830 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint_base2006 = 56.8

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	294	33.2	296	33.0	296	33.0	271	36.1	271	36.0	271	36.1
401.bzip2	474	20.4	474	20.4	477	20.2	467	20.7	468	20.6	466	20.7
403.gcc	255	31.6	252	32.0	256	31.5	255	31.6	252	32.0	256	31.5
429.mcf	167	54.6	165	55.2	162	56.2	167	54.6	165	55.2	162	56.2
445.gobmk	431	24.3	432	24.3	432	24.3	431	24.3	432	24.3	432	24.3
456.hmmer	136	68.4	136	68.4	136	68.4	136	68.4	136	68.4	136	68.4
458.sjeng	429	28.2	430	28.1	429	28.2	425	28.5	424	28.5	424	28.5
462.libquantum	3.39	6110	3.36	6160	3.41	6080	3.39	6110	3.36	6160	3.41	6080
464.h264ref	470	47.1	469	47.2	468	47.2	470	47.1	469	47.2	468	47.2
471.omnetpp	162	38.6	163	38.4	159	39.4	128	48.9	129	48.5	129	48.4
473.astar	236	29.7	236	29.7	235	29.9	235	29.9	235	29.9	235	29.9
483.xalancbmk	112	61.4	111	62.4	112	61.8	105	65.7	105	65.6	103	67.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Snoop Mode set to Home Snoop

Virtualization Technology disabled

System Profile set to custom

CPU Power Management set to Maximum Performance

C States set to Autonomous

C1E disabled

Energy Efficient Turbo disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-t2sb Mon Apr 25 01:22:27 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge R830 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint_base2006 = 56.8

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4650 v4 @ 2.20GHz
        4 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 14
    siblings : 28
    physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
    physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 35840 KB
```

```
From /proc/meminfo
MemTotal:      529325584 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-t2sb 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 25 01:18
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        btrfs  461G  9.3G  449G   3% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge R830 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint_base2006 = 56.8

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.2.4 03/31/2016

Memory:

32x 00AD063200AD HMA82GR7MFR8N-UH 16 GB 2 rank 2400 MHz
16x Not Specified Not Specified

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

OMP_NUM_THREADS = "56"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge R830 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint_base2006 = 56.8

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
473.astar: icpc -m64
```

Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hmmr: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
471.omnetpp: -D_FILE_OFFSET_BITS=64  
473.astar: -DSPEC_CPU_LP64  
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge R830 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint_base2006 = 56.8

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
               -ansi-alias
```

```
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div
            -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias
```

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

```
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
```

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -prof-use(pass 2)
              -opt-ra-region-strategy=block           -ansi-alias
              -Wl,-z,muldefs -L/sh -lsmartheap
```

```
473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
            -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64
```

```
483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
                -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap
```

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 58.8

PowerEdge R830 (Intel Xeon E5-4650 v4, 2.20 GHz)

SPECint_base2006 = 56.8

CPU2006 license: 55

Test date: Apr-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Dec-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 26 16:13:16 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 July 2016.