



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL560 Gen9  
(2.10 GHz, Intel Xeon E5-4640 v4)

**SPECint®2006 = 56.2**

**SPECint\_base2006 = 53.6**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Aug-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

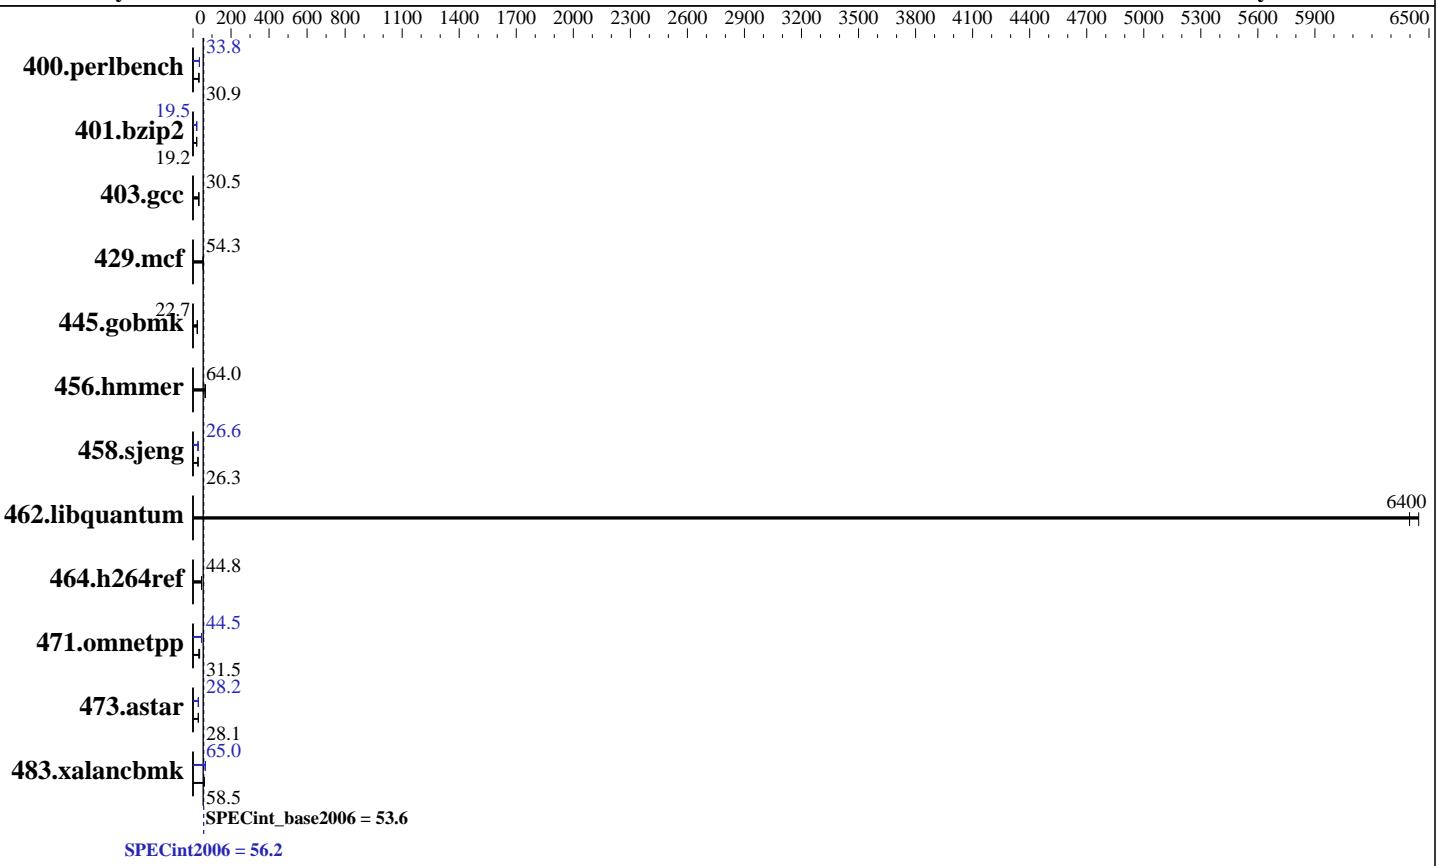

## Hardware

CPU Name: Intel Xeon E5-4640 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1, Kernel 3.12.49-11-default  
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL560 Gen9  
(2.10 GHz, Intel Xeon E5-4640 v4)

**SPECint2006 = 56.2**

**SPECint\_base2006 = 53.6**

CPU2006 license: 3

Test date: Aug-2016

Test sponsor: HPE

Hardware Availability: Jul-2016

Tested by: HPE

Software Availability: Dec-2015

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	316	31.0	<b>316</b>	<b>30.9</b>	316	30.9	289	33.8	289	33.9	<b>289</b>	<b>33.8</b>
401.bzip2	503	19.2	499	19.3	<b>503</b>	<b>19.2</b>	<b>496</b>	<b>19.5</b>	496	19.5	496	19.5
403.gcc	264	30.5	<b>264</b>	<b>30.5</b>	264	30.5	264	30.5	<b>264</b>	<b>30.5</b>	264	30.5
429.mcf	167	54.7	173	52.8	<b>168</b>	<b>54.3</b>	167	54.7	173	52.8	<b>168</b>	<b>54.3</b>
445.gobmk	462	22.7	462	22.7	<b>462</b>	<b>22.7</b>	462	22.7	462	22.7	<b>462</b>	<b>22.7</b>
456.hmmer	<b>146</b>	<b>64.0</b>	145	64.2	146	64.0	<b>146</b>	<b>64.0</b>	145	64.2	146	64.0
458.sjeng	460	26.3	<b>460</b>	<b>26.3</b>	460	26.3	455	26.6	455	26.6	<b>455</b>	<b>26.6</b>
462.libquantum	3.24	6400	3.21	6450	<b>3.24</b>	<b>6400</b>	3.24	6400	3.21	6450	<b>3.24</b>	<b>6400</b>
464.h264ref	494	44.8	494	44.8	<b>494</b>	<b>44.8</b>	494	44.8	494	44.8	<b>494</b>	<b>44.8</b>
471.omnetpp	200	31.3	<b>199</b>	<b>31.5</b>	179	34.9	141	44.4	<b>140</b>	<b>44.5</b>	139	44.9
473.astar	<b>249</b>	<b>28.1</b>	249	28.2	251	28.0	250	28.1	249	28.2	<b>249</b>	<b>28.2</b>
483.xalancbmk	117	59.0	118	58.3	<b>118</b>	<b>58.5</b>	<b>106</b>	<b>65.0</b>	106	64.9	106	65.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

### BIOS Configuration:

HP Power Profile set to Balanced Power and Performance  
QPI Snoop Configuration set to Home Snoop  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh  
Intel Hyper Threading set to Disabled  
Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 ## e3ffb8667b5a285932ceab81e28219e1  
running on sles12biswadl1560 Wed Aug 24 14:29:26 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4640 v4)

**SPECint2006 = 56.2**

**SPECint\_base2006 = 53.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Aug-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E5-4640 v4 @ 2.10GHz
        4 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12
siblings : 12
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB

From /proc/meminfo
MemTotal:      529310876 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
Linux sles12biswadl560 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 24 14:28

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   331G  220G  111G  67%  /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4640 v4)

**SPECint2006 = 56.2**

**SPECint\_base2006 = 53.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Aug-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

BIOS HP P85 07/01/2016

Memory:

16x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:  
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 2133 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "48"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4640 v4)

**SPECint2006 = 56.2**

**SPECint\_base2006 = 53.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Aug-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4640 v4)

**SPECint2006 =**

**56.2**

**SPECint\_base2006 =**

**53.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:**

Aug-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
               -ansi-alias
```

```
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div
            -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias
```

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

```
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
```

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -prof-use(pass 2)
              -opt-ra-region-strategy=block           -ansi-alias
              -Wl,-z,muldefs -L/sh -lsmartheap
```

```
473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
            -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64
```

```
483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
                -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap
```

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4640 v4)

**SPECint2006 = 56.2**

**SPECint\_base2006 = 53.6**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Aug-2016

**Hardware Availability:** Jul-2016

**Software Availability:** Dec-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 20 15:06:20 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 September 2016.