



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECint®2006 = 67.9

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECint_base2006 = 64.3

CPU2006 license: 9046


Test date: May-2016

Test sponsor: Sugon

Hardware Availability: May-2016

Tested by: Sugon

Software Availability: May-2016

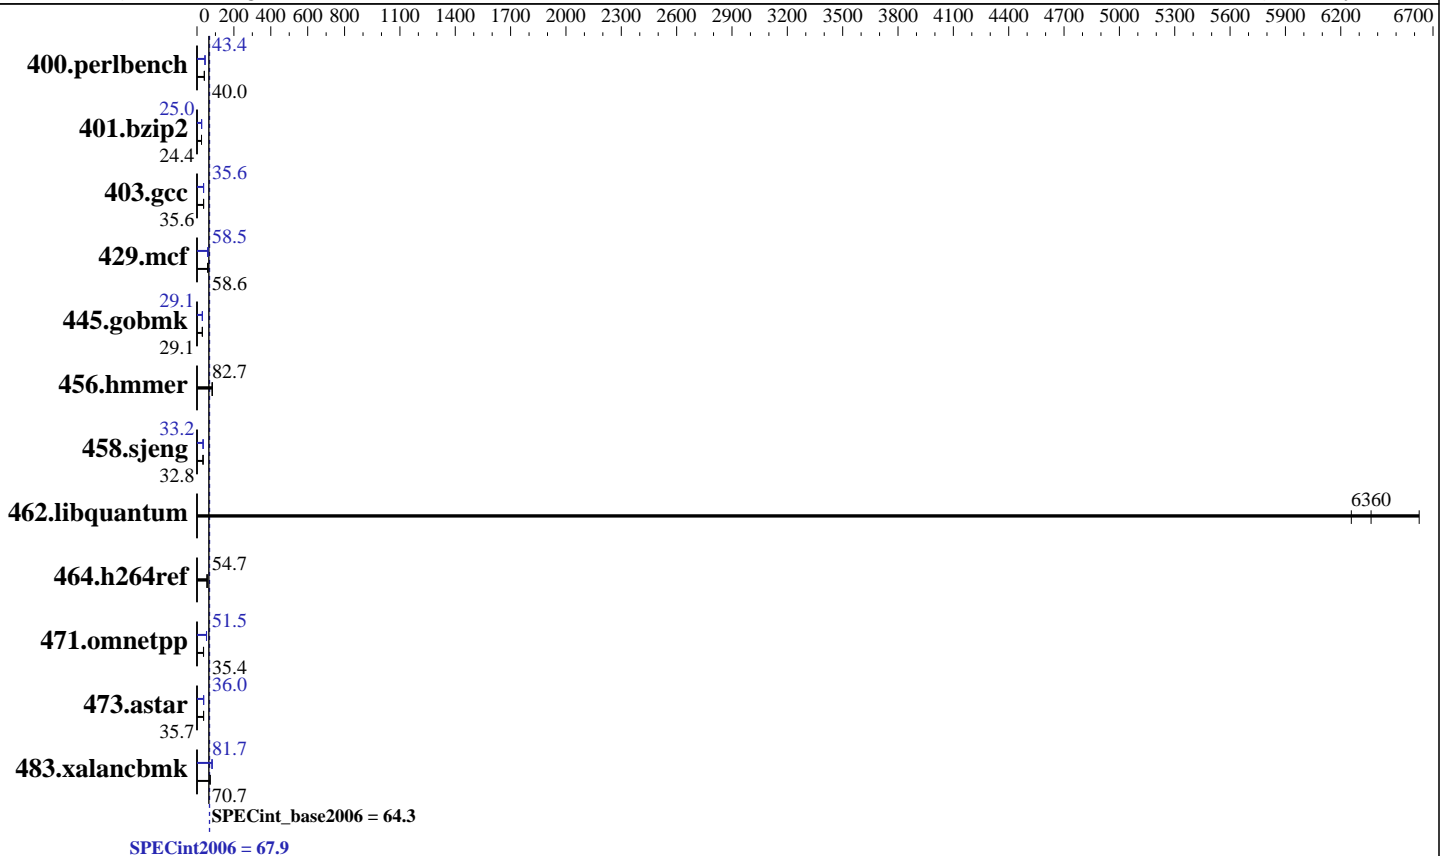

Hardware

CPU Name: Intel Xeon E7-8890 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 96 cores, 4 chips, 24 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 60 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 2 x 1 TB SATA, 7200 RPM, RAID 1
 Other Hardware: None

Software

Operating System: NeoKylin Linux Advanced Server release V7Update2 (Potassium) 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = **67.9**

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECint_base2006 = **64.3**

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: May-2016
Hardware Availability: May-2016
Software Availability: May-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	244	40.0	245	39.8	244	40.0	224	43.6	225	43.4	225	43.4
401.bzip2	395	24.4	396	24.4	393	24.5	386	25.0	386	25.0	386	25.0
403.gcc	226	35.7	226	35.6	226	35.6	226	35.6	227	35.5	225	35.8
429.mcf	156	58.6	157	58.0	156	58.6	154	59.3	156	58.4	156	58.5
445.gobmk	361	29.1	361	29.1	360	29.1	360	29.1	361	29.1	361	29.1
456.hammer	113	82.7	113	82.7	113	82.5	113	82.7	113	82.7	113	82.5
458.sjeng	369	32.8	369	32.8	369	32.8	364	33.2	364	33.2	364	33.2
462.libquantum	3.13	6630	3.26	6360	3.31	6260	3.13	6630	3.26	6360	3.31	6260
464.h264ref	402	55.1	405	54.6	404	54.7	402	55.1	405	54.6	404	54.7
471.omnetpp	177	35.4	178	35.1	175	35.6	121	51.5	120	51.9	122	51.4
473.astar	198	35.4	196	35.8	197	35.7	196	35.9	195	36.0	195	36.0
483.xalancbmk	97.7	70.7	97.7	70.6	97.5	70.8	84.5	81.7	84.5	81.6	84.3	81.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Package C State limit set as "C0/C1 state"

Enhanced Halt State (C1E) set as "Disable"

Energy Performance BIAS setting. set as "Performance"

ACPI T-States set as "Disable"

Sysinfo program /cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1

running on I840G25 Thu May 19 19:17:26 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = **67.9**

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECint_base2006 = **64.3**

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: May-2016
Hardware Availability: May-2016
Software Availability: May-2016

Platform Notes (Continued)

```

caution.)
  cpu cores : 24
  siblings  : 48
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
                27 28 29
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
                27 28 29
  physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
                27 28 29
  physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
                27 28 29
cache size : 30720 KB

```

```

From /proc/meminfo
MemTotal:      1056727052 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
NeoKylin Linux Advanced Server release V7Update2 (Potassium)

```

```

From /etc/*release* /etc/*version*
neokylin-release: NeoKylin Linux Advanced Server release V7Update2
(Potassium)
os-release:
  NAME="NeoKylin Linux Advanced Server"
  VERSION="V7Update2 (Potassium)"
  ID="neokylin"
  ID_LIKE="fedora"
  VERSION_ID="V7Update2"
  PRETTY_NAME="NeoKylin Linux Advanced Server V7Update2 (Potassium)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:neokylin:enterprise_linux:V7Update2:GA:server"
system-release: NeoKylin Linux Advanced Server release V7Update2 (Potassium)
system-release-cpe: cpe:/o:neokylin:enterprise_linux:v7update2:ga:server

```

```

uname -a:
Linux I840G25 3.10.0-327.el7.x86_64 #1 SMP Thu Nov 26 13:46:27 CST 2015
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 19 13:29

```

SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1       xfs   836G  5.1G  831G   1% /cpu2006

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 67.9

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECint_base2006 = 64.3

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: May-2016

Hardware Availability: May-2016

Software Availability: May-2016

Platform Notes (Continued)

BIOS American Megatrends Inc. 3.0 05/02/2016

Memory:

64x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1600 MHz
32x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

OMP_NUM_THREADS = "96"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -DSPEC_CPU_LP64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 67.9

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECint_base2006 = 64.3

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: May-2016

Hardware Availability: May-2016

Software Availability: May-2016

Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmarheap64`

Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

`445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

`473.astar: icpc -m64`

Peak Portability Flags

`400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`

`401.bzip2: -DSPEC_CPU_LP64`

`403.gcc: -DSPEC_CPU_LP64`

`429.mcf: -DSPEC_CPU_LP64`

`445.gobmk: -D_FILE_OFFSET_BITS=64`

`456.hmmer: -DSPEC_CPU_LP64`

`458.sjeng: -DSPEC_CPU_LP64`

`462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

`464.h264ref: -DSPEC_CPU_LP64`

`471.omnetpp: -D_FILE_OFFSET_BITS=64`

`473.astar: -DSPEC_CPU_LP64`

`483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 67.9

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECint_base2006 = 64.3

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: May-2016

Hardware Availability: May-2016

Software Availability: May-2016

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 67.9

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECint_base2006 = 64.3

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: May-2016

Hardware Availability: May-2016

Software Availability: May-2016

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Nov 3 10:37:06 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 November 2016.