



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint®2006 =

55.1

SPECint_base2006 =

52.4

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

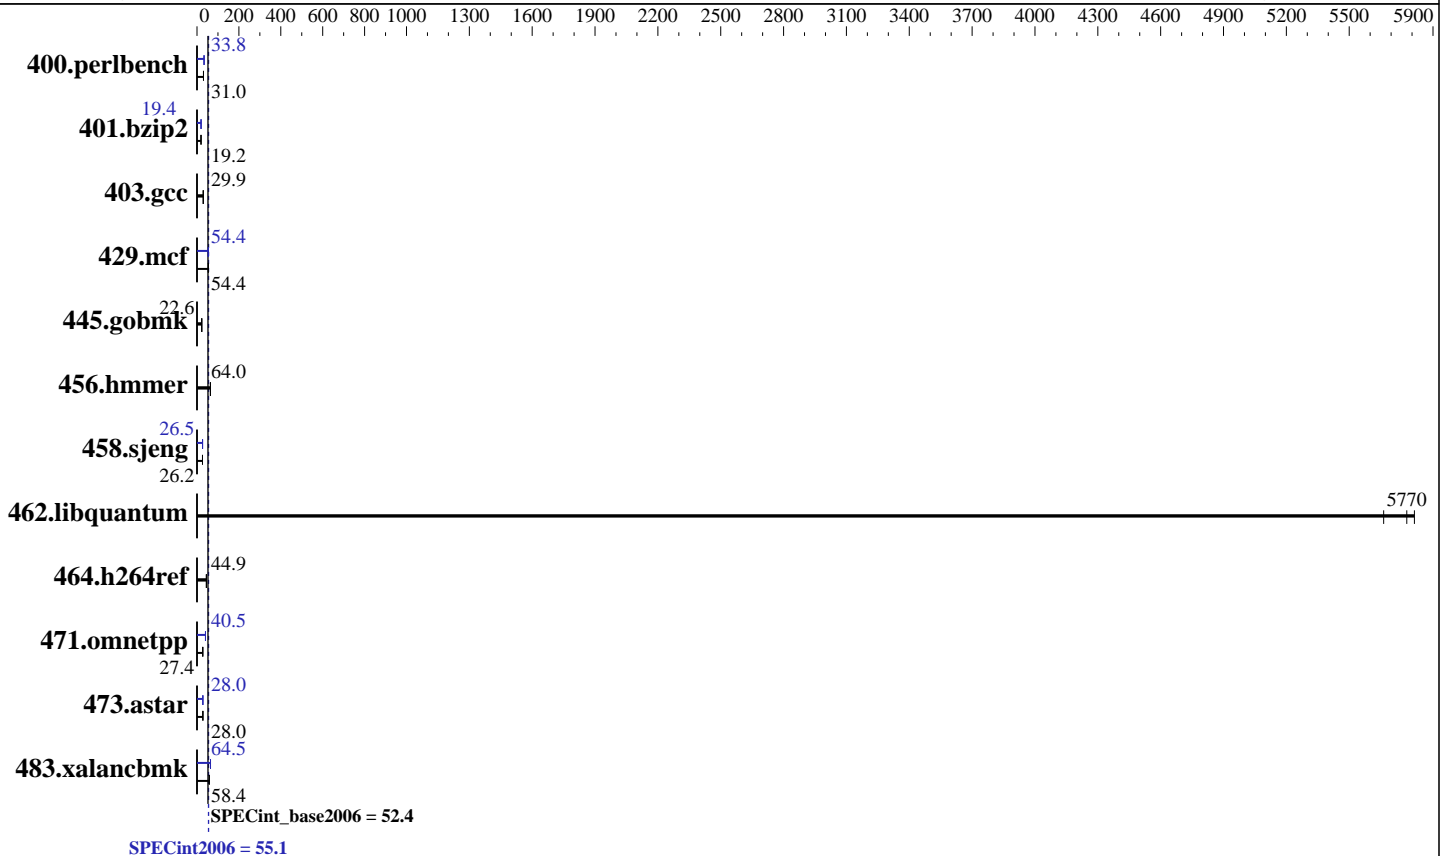

Hardware

CPU Name: Intel Xeon E5-4620 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1, Kernel 3.12.49-11-default
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint2006 =

55.1

SPECint_base2006 =

52.4

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	315	31.0	317	30.8	315	31.0	289	33.8	289	33.8	290	33.7
401.bzip2	503	19.2	503	19.2	502	19.2	498	19.4	497	19.4	497	19.4
403.gcc	269	29.9	269	30.0	269	29.9	269	29.9	269	30.0	269	29.9
429.mcf	168	54.4	167	54.8	169	53.9	167	54.5	171	53.3	168	54.4
445.gobmk	462	22.7	463	22.6	463	22.6	462	22.7	463	22.6	463	22.6
456.hammer	146	63.9	145	64.2	146	64.0	146	63.9	145	64.2	146	64.0
458.sjeng	462	26.2	462	26.2	462	26.2	456	26.5	456	26.5	457	26.5
462.libquantum	3.66	5660	3.59	5770	3.57	5810	3.66	5660	3.59	5770	3.57	5810
464.h264ref	492	44.9	494	44.8	493	44.9	492	44.9	494	44.8	493	44.9
471.omnetpp	228	27.4	228	27.4	226	27.7	154	40.5	154	40.5	155	40.4
473.astar	250	28.1	251	28.0	251	28.0	252	27.8	250	28.0	250	28.0
483.xalancbmk	119	58.2	118	58.6	118	58.4	107	64.5	107	64.5	107	64.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

BIOS Configuration:

HP Power Profile set to Balanced Power and Performance

QPI Snoop Configuration set to Home Snoop

Collaborative Power Control set to Disabled

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x Refresh

Intel Hyper Threading set to Disabled

Sysinfo program /home/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on sles12biswadl560 Sun Sep 4 16:37:39 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9
(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint2006 = 55.1

SPECint_base2006 = 52.4

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Platform Notes (Continued)

model name : Intel(R) Xeon(R) CPU E5-4620 v4 @ 2.10GHz

4 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 10

physical 0: cores 0 2 3 4 8 9 10 11 12

physical 1: cores 0 2 3 4 8 9 10 11 12

physical 2: cores 0 2 3 4 8 9 10 11 12

physical 3: cores 0 2 3 4 8 9 10 11 12

cache size : 25600 KB

From /proc/meminfo

MemTotal: 529311708 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 1

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION_ID="12.1"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux sles12biswadl560 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 4 16:36

SPEC is set to: /home/cpu2006

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda4 xfs 331G 61G 271G 19% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9
(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint2006 = 55.1

SPECint_base2006 = 52.4

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Platform Notes (Continued)

BIOS HP P85 07/01/2016

Memory:

16x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 2133 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "40"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint2006 =

55.1

SPECint_base2006 =

52.4

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint2006 =

55.1

SPECint_base2006 =

52.4

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: basepeak = yes

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmarheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmarheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmarheap

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9

(2.10 GHz, Intel Xeon E5-4620 v4)

SPECint2006 =

55.1

SPECint_base2006 =

52.4

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Jul-2016

Software Availability: Dec-2015

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Oct 4 14:49:38 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 October 2016.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7