



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint®2006 = 60.4

SPECint_base2006 = 57.2

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Feb-2017

Hardware Availability: Mar-2016

Software Availability: Mar-2016

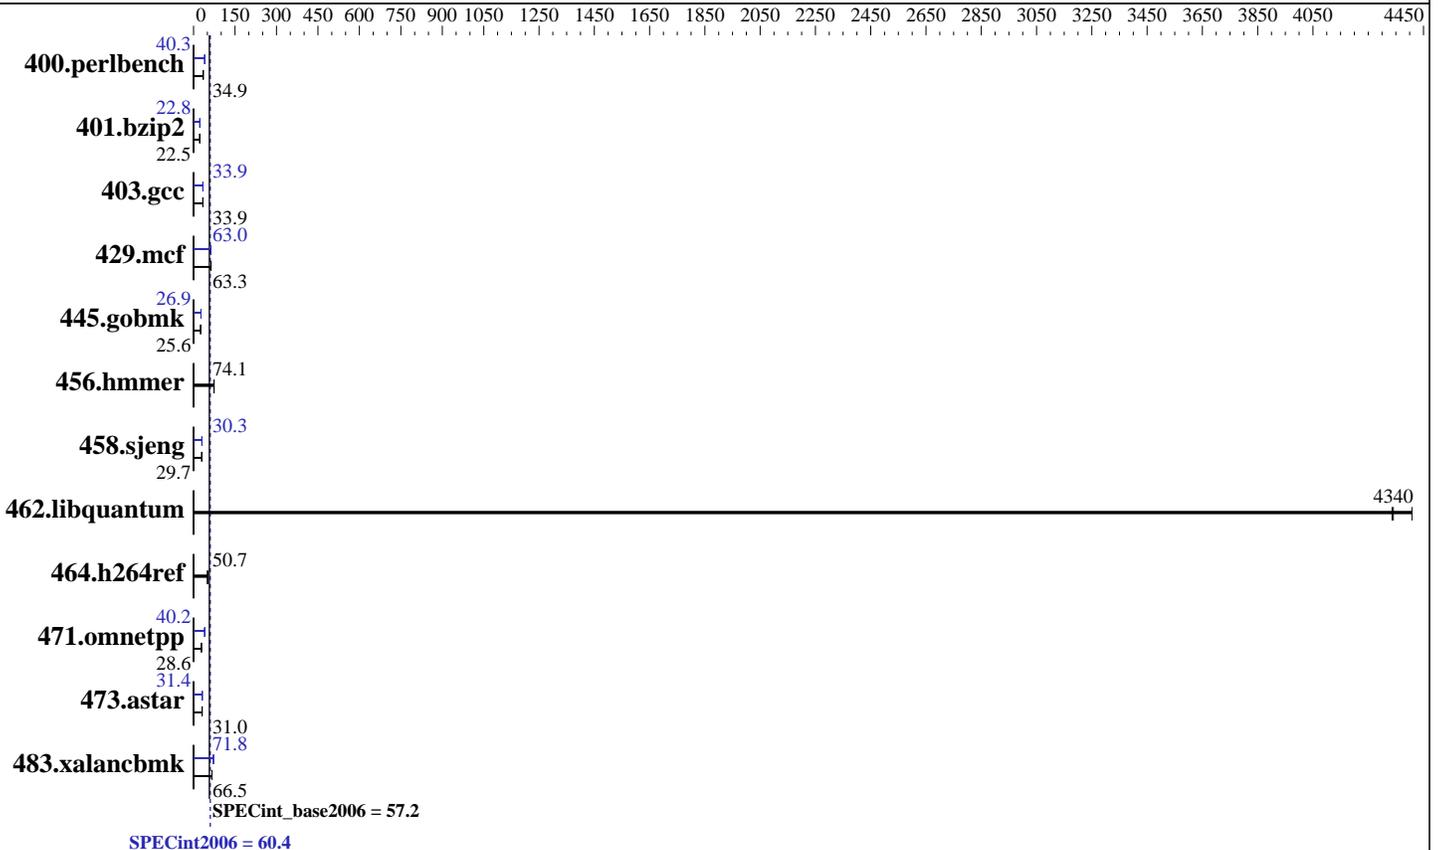

Hardware

CPU Name: Intel Xeon E5-2620 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
 Disk Subsystem: 1 x 240 GB SATA II SSD
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.18.2.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint2006 = 60.4

SPECint_base2006 = 57.2

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Feb-2017
Hardware Availability: Mar-2016
Software Availability: Mar-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	279	35.0	<u>280</u>	<u>34.9</u>	280	34.9	242	40.3	242	40.3	<u>242</u>	<u>40.3</u>
401.bzip2	430	22.4	<u>430</u>	<u>22.5</u>	428	22.5	423	22.8	<u>422</u>	<u>22.8</u>	422	22.9
403.gcc	<u>238</u>	<u>33.9</u>	237	34.0	238	33.8	<u>237</u>	<u>33.9</u>	237	34.0	238	33.9
429.mcf	<u>144</u>	<u>63.3</u>	145	62.8	144	63.3	145	63.0	146	62.4	<u>145</u>	<u>63.0</u>
445.gobmk	409	25.7	410	25.6	<u>410</u>	<u>25.6</u>	390	26.9	390	26.9	<u>390</u>	<u>26.9</u>
456.hammer	<u>126</u>	<u>74.1</u>	126	74.1	126	74.0	<u>126</u>	<u>74.1</u>	126	74.1	126	74.0
458.sjeng	407	29.7	<u>407</u>	<u>29.7</u>	407	29.7	399	30.3	399	30.3	<u>399</u>	<u>30.3</u>
462.libquantum	<u>4.77</u>	<u>4340</u>	4.78	4340	4.70	4410	<u>4.77</u>	<u>4340</u>	4.78	4340	4.70	4410
464.h264ref	<u>437</u>	<u>50.7</u>	437	50.7	436	50.7	<u>437</u>	<u>50.7</u>	437	50.7	436	50.7
471.omnetpp	219	28.5	<u>219</u>	<u>28.6</u>	219	28.6	<u>155</u>	<u>40.2</u>	155	40.2	155	40.3
473.astar	228	30.8	<u>226</u>	<u>31.0</u>	226	31.1	223	31.5	224	31.4	<u>223</u>	<u>31.4</u>
483.xalancbmk	103	66.7	<u>104</u>	<u>66.5</u>	104	66.5	95.5	72.2	<u>96.1</u>	<u>71.8</u>	96.2	71.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings
Hyper-Threading (All) = Disable
Power Technology = Energy Efficient
Enforce POR = Disabled
Memory Frequency = 2133

BMC Setting
Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on SUT Mon Feb 13 11:08:20 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint2006 = 60.4

ACTINA SOLAR 222 S6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_base2006 = 57.2

CPU2006 license: 9008

Test date: Feb-2017

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      528085676 kB
HugePages_Total:      1
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
os-release.rpmsave:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

```

```

uname -a:
Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 13 11:08

```

SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       ext4  212G  79G  122G  40% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint2006 = 60.4

SPECint_base2006 = 57.2

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Feb-2017

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 12/17/2015

Memory:

16x Hynix Semiconductor HMA84GR7AFR4N-UH 32 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh10.2"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint2006 = 60.4

ACTINA SOLAR 222 S6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_base2006 = 57.2

CPU2006 license: 9008

Test date: Feb-2017

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint2006 = 60.4

ACTINA SOLAR 222 S6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint_base2006 = 57.2

CPU2006 license: 9008

Test date: Feb-2017

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Peak Optimization Flags

C benchmarks:

- 400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch
- 401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -auto-ilp32 -qopt-prefetch
- 403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-qopt-malloc-options=3 -auto-ilp32
- 429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-qopt-prefetch -auto-p32
- 445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)
- 456.hmmer: basepeak = yes
- 458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4
- 462.libquantum: basepeak = yes
- 464.h264ref: basepeak = yes

C++ benchmarks:

- 471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmarheap
- 473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmarheap64
- 483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmarheap

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECint2006 = 60.4

SPECint_base2006 = 57.2

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Feb-2017

Hardware Availability: Mar-2016

Software Availability: Mar-2016

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Mar 22 10:49:04 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 March 2017.