



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Huawei**

**SPECint®2006 = 74.9**

**Huawei XH321 V3 (Intel Xeon E5-2699A v4)**

**SPECint\_base2006 = 72.2**

**CPU2006 license:** 3175


**Test date:** May-2017

**Test sponsor:** Huawei

**Hardware Availability:** Apr-2016

**Tested by:** Huawei

**Software Availability:** Sep-2016

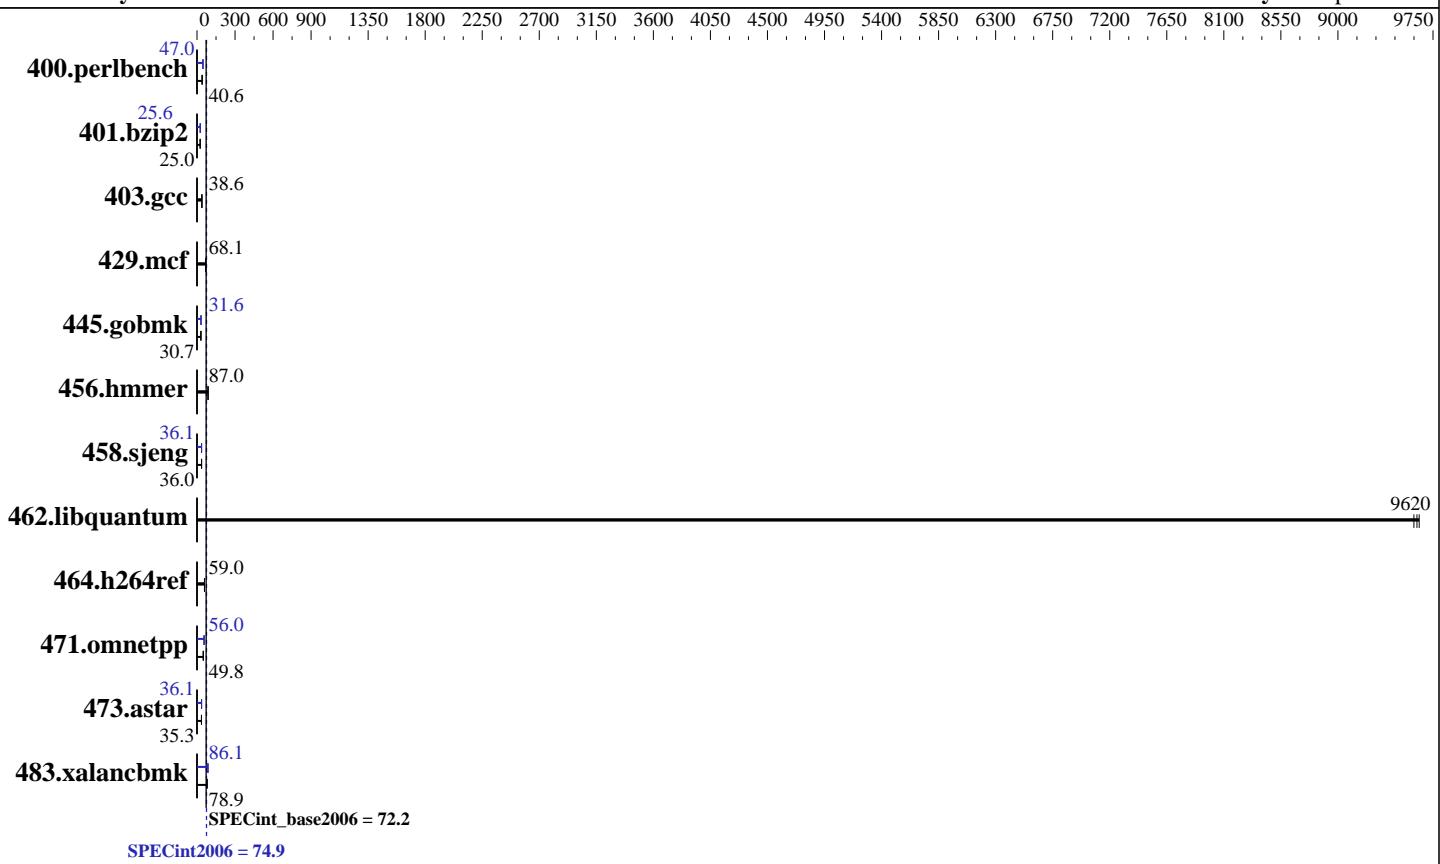

## Hardware

CPU Name: Intel Xeon E5-2699A v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 55 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R)  
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Compiler: 3.10.0-327.el7.x86\_64 C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 74.9**

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

**SPECint\_base2006 = 72.2**

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	240	40.7	<b>241</b>	<b>40.6</b>	241	40.5	208	46.9	<b>208</b>	<b>47.0</b>	208	47.1
401.bzip2	383	25.2	<b>386</b>	<b>25.0</b>	387	25.0	377	25.6	<b>377</b>	<b>25.6</b>	377	25.6
403.gcc	208	38.6	209	38.5	<b>209</b>	<b>38.6</b>	208	38.6	209	38.5	<b>209</b>	<b>38.6</b>
429.mcf	135	67.7	134	68.2	<b>134</b>	<b>68.1</b>	135	67.7	134	68.2	<b>134</b>	<b>68.1</b>
445.gobmk	342	30.7	340	30.8	<b>342</b>	<b>30.7</b>	332	<b>31.6</b>	332	31.6	331	31.7
456.hmmer	107	87.4	107	86.8	<b>107</b>	<b>87.0</b>	107	87.4	107	86.8	<b>107</b>	<b>87.0</b>
458.sjeng	<b>336</b>	<b>36.0</b>	336	36.0	336	36.0	335	36.1	<b>335</b>	<b>36.1</b>	337	35.9
462.libquantum	2.16	9600	<b>2.15</b>	<b>9620</b>	2.15	9640	2.16	9600	<b>2.15</b>	<b>9620</b>	2.15	9640
464.h264ref	<b>375</b>	<b>59.0</b>	375	59.1	375	59.0	<b>375</b>	<b>59.0</b>	375	59.1	375	59.0
471.omnetpp	<b>126</b>	<b>49.8</b>	127	49.4	125	49.8	<b>112</b>	<b>56.0</b>	113	55.2	111	56.4
473.astar	201	35.0	<b>199</b>	<b>35.3</b>	198	35.4	<b>195</b>	<b>36.1</b>	193	36.3	195	36.0
483.xalancbmk	86.3	79.9	87.8	78.6	<b>87.5</b>	<b>78.9</b>	80.2	86.0	80.0	86.3	<b>80.2</b>	<b>86.1</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

```
Set Power Efficiency Mode to Custom
Set Snoop Mode to ES mode
Set Patrol Scrub to Disable
Set Hyper-Threading to Disable
Sysinfo program /spec17/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Mon May 15 21:04:16 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2699A v4 @ 2.40GHz
  2 "physical id"s (chips)
  44 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 74.9**

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

**SPECint\_base2006 = 72.2**

**CPU2006 license:** 3175

**Test date:** May-2017

**Test sponsor:** Huawei

**Hardware Availability:** Apr-2016

**Tested by:** Huawei

**Software Availability:** Sep-2016

## Platform Notes (Continued)

```
caution.)  
    cpu cores : 22  
    siblings   : 22  
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27  
    28  
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27  
    28  
    cache size : 56320 KB  
  
From /proc/meminfo  
MemTotal:      263566508 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB  
  
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux Server"  
  VERSION="7.2 (Maipo)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="7.2"  
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"  
  ANSI_COLOR="0;31"  
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server  
  
uname -a:  
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29  
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 May 15 18:20  
  
SPEC is set to: /spec17  
Filesystem      Type  Size  Used Avail Use% Mounted on  
 /dev/sda2       xfs   254G   67G  188G  27% /  
Additional information from dmidecode:  
  
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.  
  
BIOS Insyde Corp. 3.31 08/22/2016  
Memory:  
 16x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz  
  
(End of data from sysinfo program)
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 74.9**

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

**SPECint\_base2006 = 72.2**

**CPU2006 license:** 3175

**Test date:** May-2017

**Test sponsor:** Huawei

**Hardware Availability:** Apr-2016

**Tested by:** Huawei

**Software Availability:** Sep-2016

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec17/libs/32:/spec17/libs/64:/spec17/sh10.2"

OMP\_NUM\_THREADS = "44"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hammer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Huawei**

**SPECint2006 = 74.9**

**Huawei XH321 V3 (Intel Xeon E5-2699A v4)**

**SPECint\_base2006 = 72.2**

**CPU2006 license:** 3175

**Test date:** May-2017

**Test sponsor:** Huawei

**Hardware Availability:** Apr-2016

**Tested by:** Huawei

**Software Availability:** Sep-2016

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div -auto-ilp32 -qopt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 74.9**

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

**SPECint\_base2006 = 72.2**

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Apr-2016

Tested by: Huawei

Software Availability: Sep-2016

## Peak Optimization Flags (Continued)

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2)

456.hmmr: basepeak = yes

458sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -qopt-ra-region-strategy=block  
 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
 -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

**SPECint2006 = 74.9**

Huawei XH321 V3 (Intel Xeon E5-2699A v4)

**SPECint\_base2006 = 72.2**

**CPU2006 license:** 3175

**Test date:** May-2017

**Test sponsor:** Huawei

**Hardware Availability:** Apr-2016

**Tested by:** Huawei

**Software Availability:** Sep-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Jun 12 18:39:00 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 June 2017.